

# Division 10 Catalog 2011

Washroom  
Accessories –  
One source for  
all applications



## ONE SOURCE FOR ANY APPLICATION

Innovation, style, form and function in a breadth of product that's unmatched in the industry. You'll find Bradley products in restaurants, airports, movie theaters, office buildings, stores, hotels – all kinds of unexpected places. Bradley. The one source for all your washroom accessory needs.

### CONTENTS


<b>1</b>	<b>Accessories Warranty</b>
<b>1</b>	<b>Accessibility Guidelines</b>
<b>1</b>	<b><i>Bradex</i>® Shipping Program</b>
<b>2</b>	<b>Multi-Purpose Units</b>
<b>5</b>	<b>Towel Dispensers</b>
<b>15</b>	<b>Aerix™ Hand Dryers – NEW</b>
<b>16</b>	<b>Waste Receptacles</b>
<b>20</b>	<b>Napkin/Tampon/Condom Vendors</b>
<b>22</b>	<b>Disposal Units</b>
<b>24</b>	<b>Toilet Tissue Holders</b>
<b>30</b>	<b>Combination Units</b>
<b>33</b>	<b>Soap Dispensers</b>
<b>38</b>	<b>Mirrors and Shelves</b>
<b>42</b>	<b>Grab Bars and Rails</b>
<b>44</b>	<b>Grab Bar Configurations</b>
<b>49</b>	<b>Grab Bars</b>
<b>50</b>	<b>Boutique</b>
<b>52</b>	<b>Hospitality</b>
<b>65</b>	<b>Custodial</b>
<b>66</b>	<b>Shower Seats</b>
<b>69</b>	<b>Medicine Cabinets</b>
<b>71</b>	<b>Baby Changing Station</b>
<b>72</b>	<b>Health Care Units</b>
<b>73</b>	<b>Security Accessories</b>
<b>80</b>	<b>Mills® Partitions</b>
<b>81</b>	<b>Partition Styles</b>
<b>82</b>	<b>Lenox® Lockers</b>
<b>83</b>	<b>Maintenance Instructions</b>
<b>84</b>	<b>Index</b>



## BRADLEY WASHROOM ACCESSORIES WARRANTY

Product warranties may be found on Bradley's website  
*bradleycorp.com*

## ACCESSIBILITY GUIDELINES

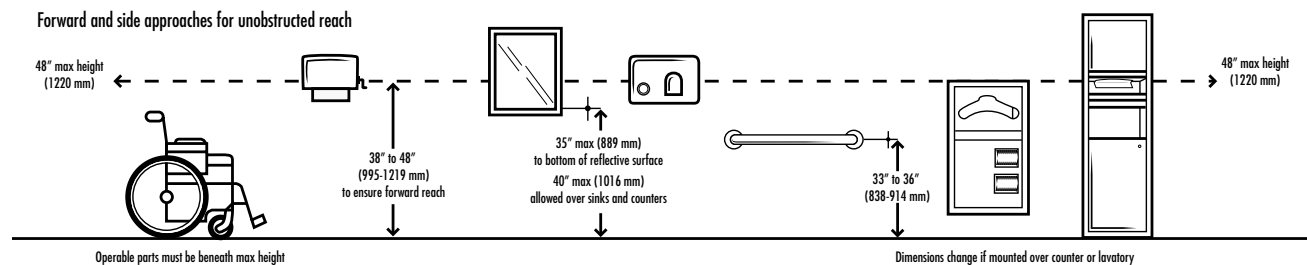

**Note:** Information from the ADA-ABA Accessibility Guidelines for Buildings and Facilities found on The United States Access Board website: <http://www.access-board.gov/>

## Bradex® SHIPPING PROGRAM


All products designated as **Bradex®** products will ship three business days after the date the order has been entered and acknowledged by the Bradley Corporation. Standard shipping terms apply.

**Please note:** The entire order must consist of **Bradex®** products to qualify for three business day shipping.

Need it faster? One day shipping is available with the **Rush Express (BX-Rx)** shipment option. Maximum quantities apply, please contact your local Bradley representative for further information.

You need options and we have them. Accessories to fit every washroom – and every budget. Contemporary satin finish stainless steel design to match any decor in recessed, semi-recessed and surface-mounted styles. From stylish restaurants and office buildings to schools and recreation centers, Bradley's line of accessories will fit any application.

**Optional Features are listed on page 4.**



## MODEL 130


Recessed unit with mirrored door 15" W x 18" H. 800 multi-fold or 600 C-fold towel capacity. Soap dispenser with lock slides open for filling with capacity for 100 oz. of liquid soap. Refill gauge. Mirrored door and soap dispenser locks keyed alike.

Rough wall opening 15 $\frac{5}{8}$ " W x 29 $\frac{1}{8}$ " H x 4" D.

### -10 Semi-Recessed:

Projects 2" from wall.

### -11 Surface-Mounted: projects 4" from wall.




## MODEL 1471

Recessed unit dispenses 250 multi-fold or 150 C-fold towels. Swing out soap dispenser for filling with capacity for 40 oz. of liquid soap. Sight gauge indicates refill time.

Rough wall opening 15 $\frac{1}{2}$ " W x 11 $\frac{1}{4}$ " H x 4" D.

### -11 Surface-Mounted:

Projects 4" from wall.



## MODEL 155


Mirrored door 15" W x 18" H. 800 multi-fold or 600 C-fold towel capacity.

Rough wall opening 15 $\frac{5}{8}$ " W x 29 $\frac{1}{8}$ " H x 4" D.

### -11 Surface-Mounted:

Projects 4" from wall.



**MODEL 175**

Recessed medicine cabinet. Mirrored door 17 $\frac{1}{8}$ " W x 30 $\frac{5}{8}$ " H with spring-buffered rodstop. Interior storage cabinet with adjustable shelves. Razor blade disposal slot. May be inverted for left hand door swing.


Rough wall opening 15 $\frac{5}{8}$ " W x 29 $\frac{1}{8}$ " H x 4" D.

**-10 Semi-Recessed**

2" in wall, projects 2 $\frac{13}{32}$ "

**-11 Surface-Mounted**


Projects 4" from wall.

**MODEL 194**

For use behind continuous mirror or finished wall. 800 multi-fold or 600 C-fold towel capacity. Lock secured. Soap dispenser secured with lock slides open for filling with capacity for 100 oz. of liquid soap. Refill gauge. Locks on towel and soap dispensers keyed alike.

Rough wall opening 15 $\frac{5}{8}$ " W x 30 $\frac{1}{4}$ " H x 4" D.

Use with  $\frac{1}{2}$ " thick drywall installations.


**MODEL 198**

For use behind continuous mirror or finished wall. 800 multi-fold or 600 C-fold towel capacity. Lock secured.

Rough wall opening 15 $\frac{5}{8}$ " W x 30 $\frac{1}{4}$ " H x 4" D.

Use with  $\frac{1}{2}$ " thick drywall installations.






## MODEL 1981

In-wall mounted towel dispenser for use behind mirror. Dispenses 800 multi-fold or 600 C-fold towels. Lock secures behind hinged dispenser lip which opens for bottom refilling.

Rough wall opening 12½" W x 18½" H x 4" D.



## MODEL 1985

For use behind continuous mirror or finished wall. 800 multi-fold or 600 C-fold towel capacity. Lock secures hinged towel dispenser lip which opens for refilling from bottom.

Rough wall opening 15⅝" W x 30¼" H x 4" D.

Use with ⅝" thick drywall installations.




## OPTIONAL FEATURES

FEATURES	MODELS	ADD SUFFIX
Semi-Recessed (2" in-wall depth for 4" units, 3½" in-wall depth for 7½" units)	All except 194, 198	- 10
Surface-Mounted (4" collar standard on 4" units, 7½" collar standard on 7½" units)	All except 194, 198	- 11
Two liquid valves	All units with soap reservoirs except 1471	- 14
Interior shelves	130, 155	- 16
Single-fold towels (7½" depth, 1,000 capacity)	130, 155	- 20
Stainless steel door in lieu of mirror*	130, 155, 175	- 21
No. 8 stainless steel mirror in lieu of glass	All except 1471, 194, 198	- 23
Adjustable tilt mirror	130, 155, 170	- 25
Cup dispenser	130, 155	- 27

\*Available on other models on request.

**Note:** Some option combinations may not be available on a single unit. Consult your Bradley representative.

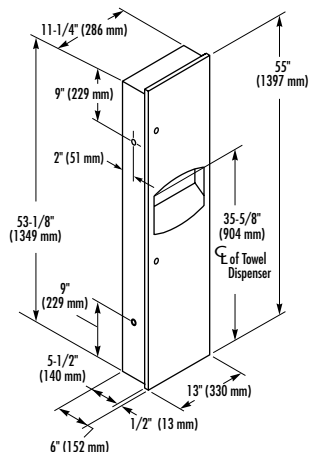

## MODEL 2017 *Bradex*®

Constructed of architectural satin finish stainless steel. Dispenses 1,100 single-fold, 800 multi-fold or 600 C-fold towels. Waste receptacle has push-flap door and 4.9-gallon, removable, molded-plastic insert.


Rough wall opening 11 $\frac{3}{4}$ " W x 53 $\frac{5}{8}$ " H x 4 $\frac{3}{4}$ " D.

### -10 Semi-Recessed

3 $\frac{1}{2}$ " in wall, projects 2 $\frac{1}{2}$ " from wall.

### -11 Surface-Mounted

Projects 6" from wall.

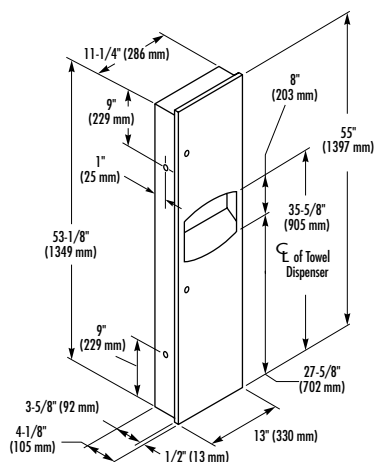

## MODEL 2027 *Bradex*®

Constructed of architectural satin finish stainless steel. Dispenses 800 multi-fold or 600 C-fold towels. Waste receptacle has 3.3-gallon, removable, molded-plastic insert.


Rough wall opening 11 $\frac{3}{4}$ " W x 53 $\frac{5}{8}$ " H x 3 $\frac{3}{4}$ " D.

### -10 Semi-Recessed

2 $\frac{3}{8}$ " in wall, projects 2" from wall.

### -11 Surface-Mounted

Projects 4 $\frac{3}{8}$ " from wall.

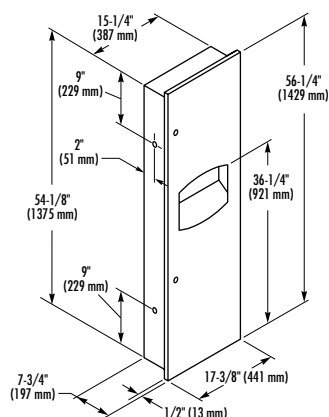

## MODEL 2037

Constructed of architectural satin finish stainless steel. Dispenses 1,100 single-fold, 800 multi-fold or 600 C-fold towels. Waste receptacle has 11.2-gallon, removable, molded-plastic insert.

Rough wall opening 15 $\frac{3}{4}$ " W x 54 $\frac{5}{8}$ " H x 7 $\frac{1}{2}$ " D.


### -10 Semi-Recessed

3 $\frac{3}{4}$ " in wall, projects 4" from wall.

### -11 Surface-Mounted

Projects 7 $\frac{3}{4}$ " from wall.



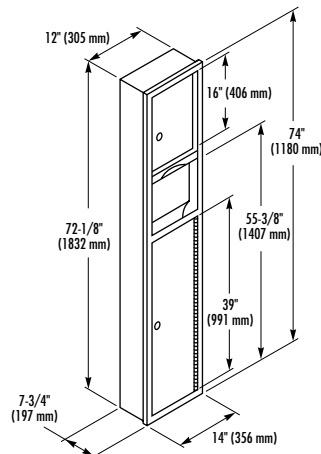

## MODEL 225

Constructed of architectural satin finish stainless steel. Adjustable towel guide dispenses 1,000 single-fold, 800 multi-fold or 600 C-fold towels. Waste receptacle has 9.2-gallon, removable, leak-proof, molded-plastic insert.


Rough wall opening 12½" W x 72¾" H x 7¾" D.

### -10 Semi-Recessed

3½" in wall, projects 4" from wall.

### -11 Surface-Mounted

Projects 7½" from wall.

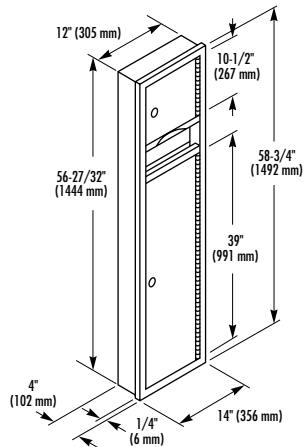

## MODEL 2251

Constructed of architectural satin finish stainless steel. Dispenses 450 multi-fold or 250 C-fold towels. Waste receptacle has 5.3-gallon, removable, molded-plastic insert.


Rough wall opening 12½" W x 57½" H x 4" D.

### -10 Semi-Recessed

2" in wall, projects 2" from wall.

### -11 Surface-Mounted

Projects 4" from wall.

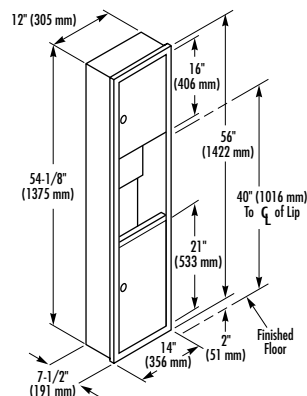

## MODEL 2252

Constructed of architectural satin finish stainless steel. Adjustable towel guide dispenses 1,000 single-fold, 700 multi-fold or 400 C-fold towels. Waste receptacle has 4.9-gallon, removable, leak-proof, molded-plastic insert.

Rough wall opening 12½" W x 54½" H x 7½" D.


### -10 Semi-Recessed

3½" in wall, projects 4" from wall.

### -11 Surface-Mounted

Projects 7½" from wall.



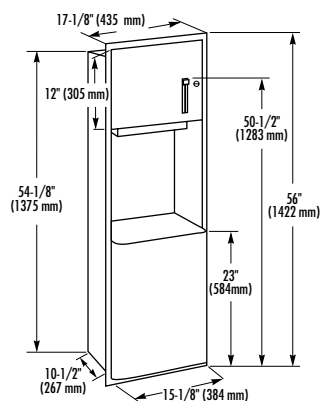

### MODEL 227

Constructed of architectural satin finish stainless steel. Towel dispenser capacity is one standard core 8" or 9" W x 800' L roll paper towel. Waste receptacle is 18-gallon, removable stainless steel. Heavy-duty, reusable, 18-gallon liner available as an accessory. Order separately using part number **P11-001**.


Rough wall opening 15<sup>5</sup>/<sub>8</sub>" W x 54<sup>5</sup>/<sub>8</sub>" H x 10<sup>1</sup>/<sub>2</sub>" D.

#### -10 Semi-Recessed

3<sup>1</sup>/<sub>2</sub>" in wall, projects 9<sup>5</sup>/<sub>16</sub>" from wall.

#### -11 Surface-Mounted

Projects 12<sup>13</sup>/<sub>16</sub>" from wall.

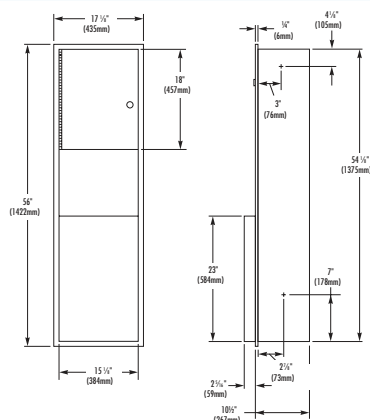

### MODEL 2271 Unit without Roll Towel Mechanism

Designed for field installation of customer-provided towel dispenser. Suggested use with 2494.


Rough wall opening 15<sup>5</sup>/<sub>8</sub>" W x 54<sup>5</sup>/<sub>8</sub>" H x 10<sup>1</sup>/<sub>2</sub>" D.

#### -10 Semi-Recessed

3<sup>1</sup>/<sub>2</sub>" in wall, projects 9<sup>5</sup>/<sub>16</sub>" from wall.

#### -11 Surface-Mounted

Projects 12<sup>13</sup>/<sub>16</sub>" from wall.

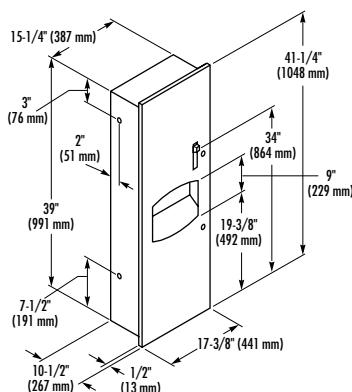

### MODEL 2277 Bradex®

Constructed of architectural satin finish stainless steel. Dispenses one standard core roll 8" or 9" W x 800' L roll paper towel. Waste receptacle has 10.5-gallon, removable, molded-plastic insert.


Rough wall opening 15<sup>3</sup>/<sub>4</sub>" W x 39<sup>1</sup>/<sub>2</sub>" H x 10<sup>1</sup>/<sub>4</sub>" D.

#### -10 Semi-Recessed

3<sup>1</sup>/<sub>2</sub>" in wall, projects 7" from wall.

#### -11 Surface-Mounted

Projects 10<sup>1</sup>/<sub>2</sub>" from wall.



### MODEL 229

Constructed of architectural satin finish stainless steel. Dispenses 200 multi-fold or 100 C-fold towels. Waste receptacle has 1.25-gallon, removable, stainless steel insert.


Rough wall opening 12<sup>1</sup>/<sub>2</sub>" W x 16<sup>1</sup>/<sub>2</sub>" H x 4" D.

#### -10 Semi-Recessed

2" in wall, projects 2" from wall.

#### -11 Surface-Mounted

Projects 4" from wall.

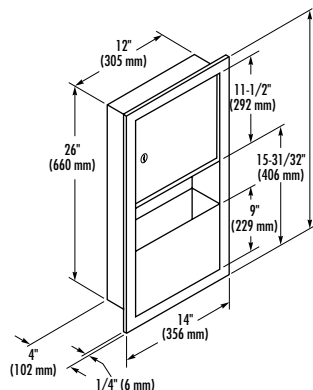

## MODEL 2291 Bradex®

Constructed of architectural satin finish stainless steel. Dispenses 475 multi-fold or 350 C-fold towels. Waste receptacle has 2-gallon, removable, stainless steel insert.


Rough wall opening 12½" W x 26½" H x 4" D.

### -10 Semi-Recessed

2" in wall, projects 2" from wall.

### -11 Surface-Mounted Bradex®

Projects 4" from wall.

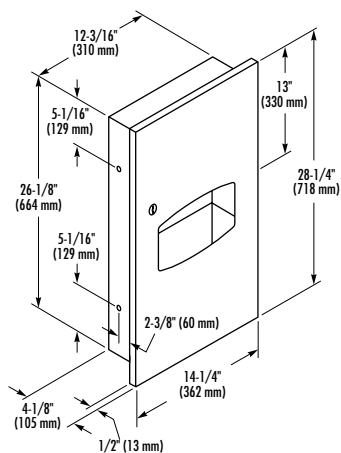

## MODEL 2297 Bradex®

Constructed of architectural satin finish stainless steel. Dispenses 475 multi-fold or 350 C-fold towels. Waste receptacle has 1.7-gallon, removable, molded-plastic insert.


Rough wall opening 12¼" W x 26⅝" H x 4" D.

### -10 Semi-Recessed

1⅝" in wall, projects 2½" from wall.

### -11 Surface-Mounted

Projects 4⅛" from wall.

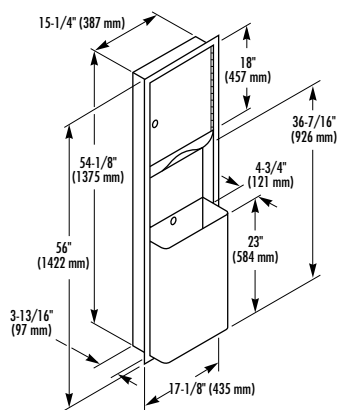

## MODEL 234 Bradex®

Constructed of architectural satin finish stainless steel. Dispenses 800 multi-fold or 600 C-fold towels. 12-gallon, stainless steel waste receptacle is secured with tumbler lock. Heavy-duty, reusable, 12-gallon liner available as an accessory. Order separately using part number **P11-004**.

### MODEL 234-35 Hinged Cover


### MODEL 234-65 Push-Flap Door Unit

Rough wall opening 15¾" W x 54½" H x 4" D.

### -10 Semi-Recessed 2" in wall, projects 6¾" from wall. Bradex®

### -11 Surface-Mounted Projects 8¾" from wall. Bradex®



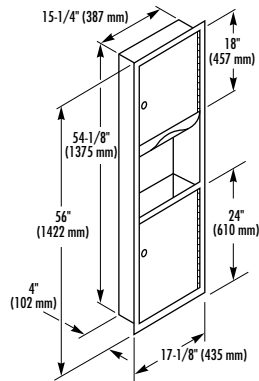

### MODEL 235 *Bradex*®

Constructed of architectural satin finish stainless steel. Dispenses 800 multi-fold or 500 C-fold towels. Waste receptacle has 4.9-gallon, removable, leak-proof, molded-plastic insert.


Rough wall opening 15¾" W x 54½" H x 4" D.

#### -10 Semi-Recessed

2" in wall, projects 2" from wall.

#### -11 Surface-Mounted *Bradex*®

Projects 4" from wall.

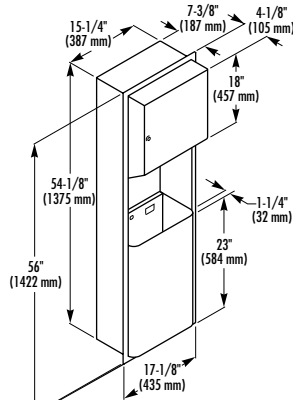

### MODEL 236

Constructed of architectural satin finish stainless steel. Dispenses one standard center-pull towel roll up to 9" wide x 9" diameter. 12-gallon, stainless steel waste receptacle. Heavy-duty, reusable, 12-gallon liner available as an accessory. Order separately using part number **P11-004**.


Rough wall opening 15¾" W x 54½" H x 7½" D.

#### -10 Semi-Recessed

3¾" in wall, projects 7¾" from wall.

#### -11 Surface-Mounted

Projects 11½" from wall.

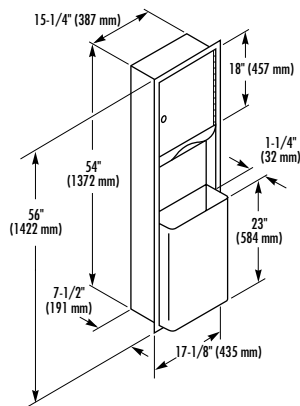

### MODEL 237

Constructed of architectural satin finish stainless steel. Dispenses 1,100 single-fold, 800 multi-fold or 600 C-fold towels. 12-gallon, stainless steel waste receptacle. Heavy-duty, reusable, 12-gallon liner available as an accessory. Order separately using part number **P11-004**.

#### MODEL 237-35 Hinged Cover

#### MODEL 237-65 Push-Flap Door Unit

Rough wall opening 15¾" W x 54½" H x 7½" D.


#### -10 Semi-Recessed

3½" in wall, projects 4" from wall.

#### -11 Surface-Mounted

Projects 7½" from wall.



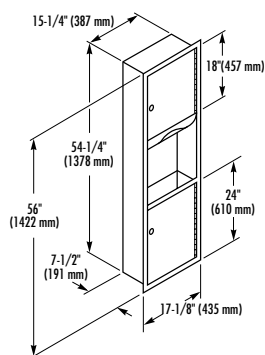

## MODEL 238

Constructed of architectural satin finish stainless steel. Dispenses 1,100 single-fold, 800 multi-fold or 600 C-fold towels. Waste receptacle has 8.2-gallon, removable, leak-proof, molded-plastic insert.


Rough wall opening 15<sup>3</sup>/<sub>4</sub>" W x 54<sup>3</sup>/<sub>4</sub>" H x 7<sup>1</sup>/<sub>2</sub>" D.

### -10 Semi-Recessed

3<sup>1</sup>/<sub>2</sub>" in wall, projects 4" from wall.

### -11 Surface-Mounted

Projects 7<sup>1</sup>/<sub>2</sub>" from wall.



## MODEL 244

Constructed of architectural satin finish stainless steel. Dispenses 800 multi-fold or 600 C-fold towels.


Rough wall opening 12<sup>1</sup>/<sub>2</sub>" W x 26<sup>5</sup>/<sub>8</sub>" H x 4" D.

### -10 Semi-Recessed

2" in wall, projects 2" from wall.

### -11 Surface-Mounted

Projects 4" from wall.



## MODEL 2441 *Bradex*®

Constructed of architectural satin finish stainless steel. Dispenses 475 multi-fold or 350 C-fold towels.

Rough wall opening 11<sup>3</sup>/<sub>8</sub>" W x 15<sup>1</sup>/<sub>16</sub>" H x 4" D.


### -10 Semi-Recessed

2" in wall, projects 2" from wall.

### -11 Surface-Mounted

Projects 4" from wall.

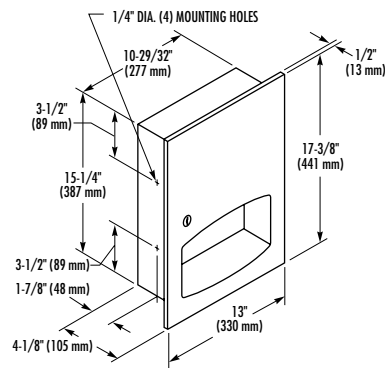

**MODEL 2442 Bradex®**

Constructed of architectural satin finish stainless steel. Dispenses 400 multi-fold or 300 C-fold towels.


Rough wall opening 11<sup>13</sup>/<sub>32</sub>" W x 15<sup>3</sup>/<sub>4</sub>" H x 4" D.

**-10 Semi-Recessed**

2<sup>1</sup>/<sub>8</sub>" in wall, projects 2" from wall.

**-11 Surface-Mounted**

Projects 4<sup>1</sup>/<sub>8</sub>" from wall.

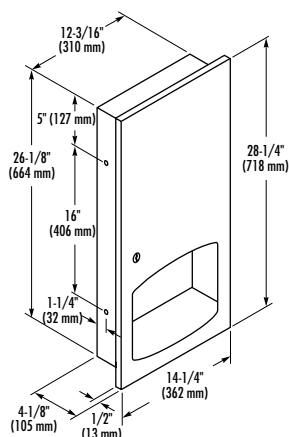**MODEL 2447**

Constructed of architectural satin finish stainless steel. Dispenses 800 multi-fold or 500 C-fold towels.


Rough wall opening 12<sup>11</sup>/<sub>16</sub>" W x 26<sup>5</sup>/<sub>8</sub>" H x 4" D.

**-10 Semi-Recessed**

1<sup>5</sup>/<sub>8</sub>" in wall, projects 2<sup>1</sup>/<sub>2</sub>" from wall.

**-11 Surface-Mounted**

Projects 4<sup>1</sup>/<sub>8</sub>" from wall.

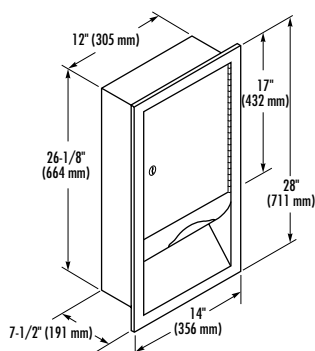**MODEL 247**

Constructed of architectural satin finish stainless steel. Dispenses single-fold, 800 multi-fold or 500 C-fold towels.


Rough wall opening 12<sup>1</sup>/<sub>2</sub>" W x 26<sup>5</sup>/<sub>8</sub>" H x 7<sup>1</sup>/<sub>2</sub>" D.

**-10 Semi-Recessed**

3<sup>1</sup>/<sub>2</sub>" in wall, projects 4" from wall.

**-11 Surface-Mounted**

Projects 7<sup>1</sup>/<sub>2</sub>" from wall.


**MODEL 2479**

Constructed of architectural satin finish stainless steel. Dispenses one standard core center pull towel roll up to 9" x 9" diameter.

Rough wall opening 15<sup>3</sup>/<sub>16</sub>" W x 28<sup>3</sup>/<sub>4</sub>" H x 11<sup>1</sup>/<sub>8</sub>" D.

**-10 Semi-Recessed**

3<sup>1</sup>/<sub>2</sub>" in wall, projects 8" from wall.



## MODEL 2481

Constructed of architectural satin finish stainless steel. Towel dispenser capacity is one standard core 8" or 9" W x 800' L roll paper towel.


Rough wall opening 15½" W x 29½" H x 10½" D.

### -10 Semi-Recessed

3½" in wall, projects 7" from wall.

### -11 Surface-Mounted


Projects 10½" from wall.



## MODEL 2482-11

Constructed of architectural satin finish stainless steel. Surface-mounted, roll paper towel dispenser. Push-bar operated. Baked-enamel towel dispenser mechanism. Unit dispenses non-perforated roll towels up to 8" in diameter and 8" wide with core sizes from 1½" to 2."


Unit measures 11" W x 17" H x 10½" D.



## MODEL 2483 Bradex®

Constructed of architectural satin finish stainless steel. Surface-mounted, roll paper towel dispenser. Lever operated. Dispenses one standard core 8" or 9" wide x 800' long roll.


Unit measures 12¼" W x 15" H x 10⅜" D.



## MODEL 2492


Surface-mounted, roll paper towel dispenser. Lever operated. Constructed of baked-enamel body with white, high-impact plastic door with clear refill window. Dispenses one standard core 8" or 9" wide x 800' long roll.

Unit measures 12⅛" W x 14¾" H x 10⅜" D.

**MODEL 2494 Bradex®**


Constructed of high impact material. Door is translucent, and fabricated from durable high-impact plastic. Dispenses non-perforated roll towels up to 8" in diameter and 8" wide with core sizes from 1½"–2." Dispenser also allows for 3" diameter stub roll. Operates with 4 "D" size alkaline batteries. Batteries are not included. Automatic transfer system will integrate stub roll when the the primary is nearly depleted. Low battery indicator. Sheet is fully protected until dispensed. The transfer system, roll holders and door are field replaceable. Complies with FCC regulation on EMC.

Unit measures 12⅜" W x 15¾" H x 9½" D.

**MODEL 2495**

Constructed of high-impact plastic. Black translucent cover with speckled gray base. Black plastic handle is treated with Bio-Pruf® to inhibit bacteria growth. Dispenses one 8" wide paper towel roll and one 4" partial (stub) roll. 1½" core diameter. Lever-operated dispensing mechanism will provide an adjustable means to dispense a nominal 5", 4" or 2½" of toweling per lever stroke. Toweling will only be dispensed with the downward stroke of the lever.

Unit measures 12⅝" W x 16½" H x 9¼" D.


**MODEL 250-15 Bradex®**

Constructed of architectural finish stainless steel. Surface-mounted, paper towel dispenser. Dispenses 525 multi-fold or 400 C-fold towels. Tumbler lock and bottom hinged. Refill indicator on cabinet face.

Unit measures 11" W x 15⅝" H x 4" D.

–33 White Enamel Finish


–1578 Bright Polish Finish

**MODEL 251-15 Bradex®**

Constructed of architectural finish stainless steel. Surface-mounted, paper towel dispenser. Dispenses 400 single-fold towels. Tumbler lock and bottom hinged. Refill indicator on cabinet face.

Unit measures 11" W x 8⅞" H x 6⅞" D.

–33 White Enamel Finish

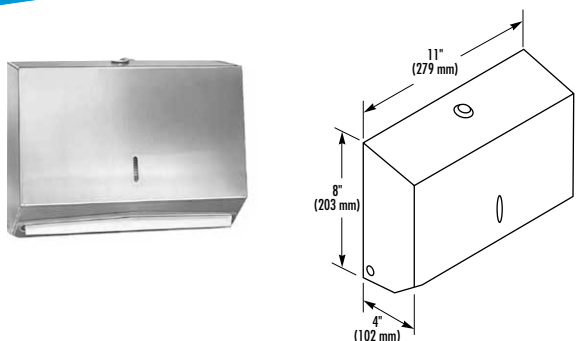


## MODEL 252 Bradex®

Constructed of architectural satin finish stainless steel. Surface-mounted, paper towel dispenser. Dispenses 350 multi-fold or 200 C-fold towels. Cabinet secured with tumbler lock and hinges at bottom. Refill indicator on cabinet face.

Unit measures 11" W x 8" H x 4" D.


-78 Bright Polish Finish

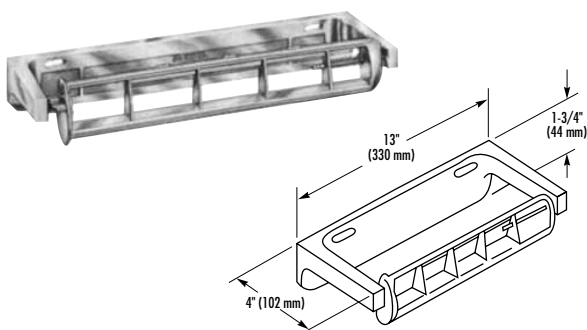

## MODEL 259

Surface-mounted, roll paper towel dispenser. Constructed of die-cast aluminum. Controlled delivery mechanism. Spring allows spindle to be released for filling. Holds one standard core roll paper towels to 6" diameter x 11" wide.

Unit measures 13" W x 1-3/4" H x 4" D.

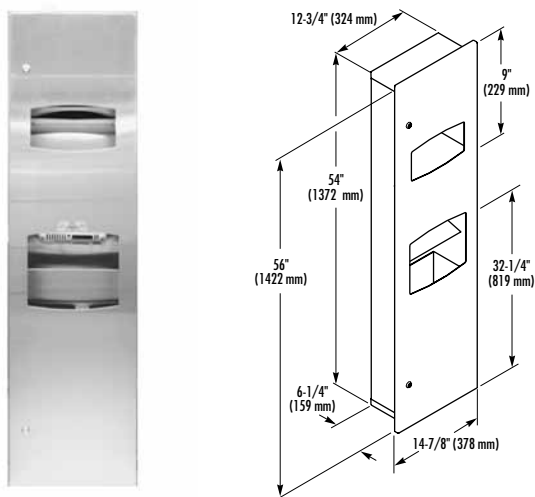

## MODEL 270

### Convenient, space-saving 3-in-1 unit

3-in-1 towel dispenser, hand dryer and waste receptacle. Constructed of architectural satin finish stainless steel. Recessed towel dispenser holds 710 single-fold, 500 multi-fold or 370 C-fold paper towels. Waste receptacle has 4.37-gallon capacity. Hand dryer has sensor activation with universal voltage.

Rough wall opening 13" W x 54-1/4" H x 5-1/2" D.

Unit measures 14-7/8" W x 56" H x 6-1/4" D.

### -10 Semi-Recessed

3-1/2" in wall, projects 2-3/4" from wall.

### -11 Surface-Mounted


Projects 6-1/4" from wall.

### -49 For Export

CE certified.




Bradley's **NEW** Aerix™ Hand Dryers save time, money and headaches. Renovation installation is made easy. Aerix 2902-28 Series offers *adjustable speed*: turn the speed up for fast drying. Turn down for quiet operation. The 2902-28 models also meet ADA requirements. There is an Aerix model to suit every application!



## MODEL 2902-280000 *Bradex*® White **NEW!**

**Adjustable speed hand dryer.** 3/16" thick porcelain cast iron cover. "No-Touch" sensor operation. **10-15 second drying time.** Universal voltage. Vandal resistant. Surface-mounted: mounting holes match those of most popular models. **ADA compliant.**

Overall dimensions 11 1/8" W x 10 3/8" H x 4" D.




## MODEL 2902-287400 *Bradex*® Stainless Steel **NEW!**

**Adjustable speed hand dryer.** "No-Touch" sensor operation. 1/16" thick stainless steel cover with satin finish. **10-15 second drying time.** Universal voltage. Vandal resistant. Surface-mounted: mounting holes match those of most popular models. **ADA compliant.**

Overall dimensions 11 1/8" W x 10 3/8" H x 4" D.

## MODEL 2902-287300 White


Enamel-coated steel cover.



## MODEL 2903-280000 *Bradex*® White **NEW!**

Infrared sensor activation. Cast iron cover. 29 second drying time. Surface-mounted: mounting holes match those of most popular models.


Overall dimensions 11 1/8" W x 10" H x 8 1/4" D.



## MODEL 2904-280000 *Bradex*® White **NEW!**

Push button activation. Cast iron cover. 29 second drying time. Surface-mounted: mounting holes match those of most popular models.

Overall dimensions 11 1/8" W x 10" H x 8 1/4" D.




## MODEL 2905-287300 *Bradex*® White

Modern design. "No-Touch" sensor activation. Steel cover. 38 second drying time. Ideal for medium-to-low traffic and medium-to-low vandal applications.

Overall dimensions 10 1/8" W x 11 7/8" H x 5 1/2" D.

# WASTE RECEPTACLES 300 SERIES

Bradley Waste Receptacles provide convenience and durability. Units are fabricated of stainless steel with exposed surfaces in architectural satin finish. Recessed units feature one-piece, stainless steel flanges of welded construction with seamless corners, burr-free edges and 1/4" return to conceal wall irregularities.




## MODEL P10-696 *Bradex*®

Unit fabricated of stainless steel of drawn seamless construction and bright polished finish.

Countertop rough-in 6" diameter hole.

Overall dimensions 6¾" diameter x 3½" D.

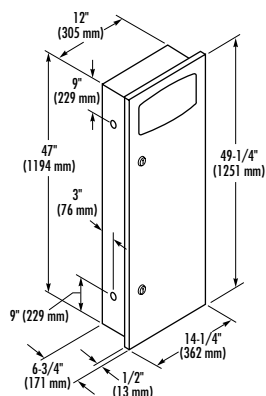


## MODEL 3157

Recessed unit with push-flap door and 9.2-gallon, removable, leak-proof, molded-plastic insert.

Rough wall opening 12½" W x 47½" H x 6½" D.

-10 **Semi-Recessed** 3" in wall, projects 3¾" from wall.

-11 **Surface-Mounted** Projects 6¾" from wall.

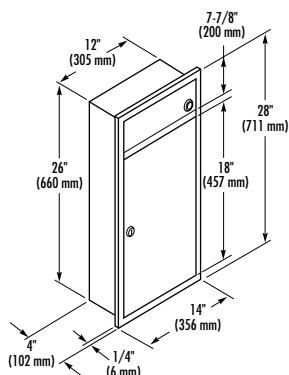


## MODEL 3251

Recessed unit with 2.8-gallon, removable, leak-proof, molded-plastic, waste receptacle insert. Tumbler lock. Push-flap door with full-length piano hinge covers receptacle opening.

Rough wall opening 12½" W x 26½" H x 4" D.

-10 **Semi-Recessed** 2" in wall, projects 2" from wall.

-11 **Surface-Mounted** Projects 4" from wall.

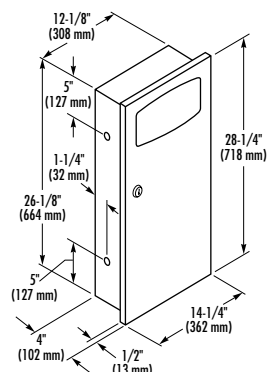

## MODEL 3257


Recessed unit with push-flap door and 2.8-gallon, removable, leak-proof, molded-plastic insert.

Rough wall opening 12⅝" W x 26⅝" H x 4" D.

-10 **Semi-Recessed** 2" in wall, projects 2" from wall.

-11 **Surface-Mounted** Projects 4" from wall.

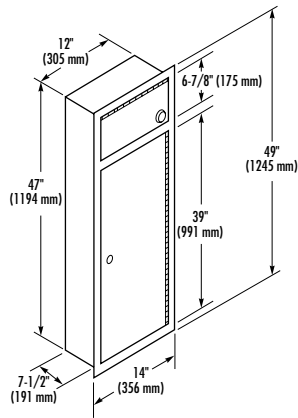


**MODEL 315-35**

Recessed unit with full-length piano hinge and tumbler lock keyed alike to companion Bradley units. 9.2-gallon, removable, leak-proof, molded-plastic insert. Push-flap door with full-length piano hinge covers receptacle opening.

Rough wall opening  $12\frac{1}{2}''$  W x  $47\frac{1}{2}''$  H x  $7\frac{1}{2}''$  D.

-10 **Semi-Recessed**  $3\frac{1}{2}''$  in wall, projects 4" from wall.

-11 **Surface-Mounted** Projects  $7\frac{1}{2}''$  from wall.

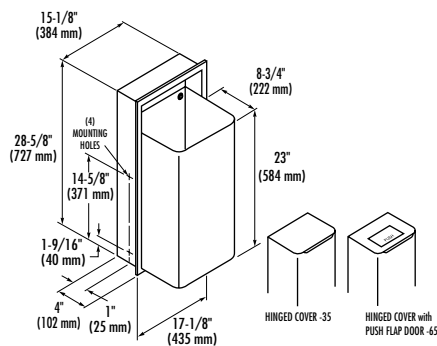**RECESSED****MODEL 334 Bradex®**


18-gallon, removable, stainless steel waste receptacle. Secured to cabinet with tumbler lock. Heavy-duty, reusable, 18-gallon liner available as an accessory. Order separately using part number **P11-001**.

**MODEL 334-35 Hinged Cover Unit****MODEL 334-65 Push-Flap Door Unit**

Rough wall opening  $15\frac{5}{8}''$  W x  $29\frac{1}{8}''$  H x  $7\frac{1}{2}''$  D. Receptacle projects  $8\frac{3}{4}''$ .

-10 **Semi-Recessed** 2" in wall, projects  $10\frac{3}{4}''$  from wall.

-11 **Surface-Mounted** Projects  $12\frac{3}{4}''$  from wall.

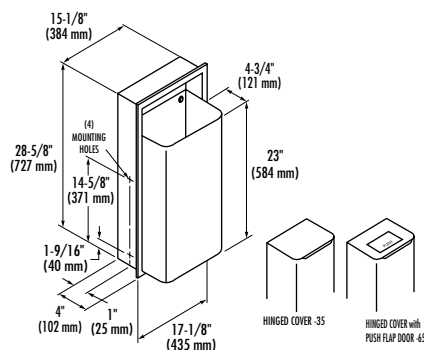
**MODEL 344 Bradex®**

12-gallon, removable, stainless steel waste receptacle. Secured to cabinet with tumbler lock. Heavy-duty, reusable, 12-gallon liner available as an accessory. Order separately using part number **P11-004**.

**MODEL 344-35 Hinged Cover Unit****MODEL 344-65 Push-Flap Door Unit**

Rough wall opening  $15\frac{5}{8}''$  W x  $29\frac{1}{8}''$  H x 4" D. Receptacle projects  $4\frac{3}{4}''$ .

-10 **Semi-Recessed** 2" in wall, projects  $6\frac{3}{4}''$  from wall.

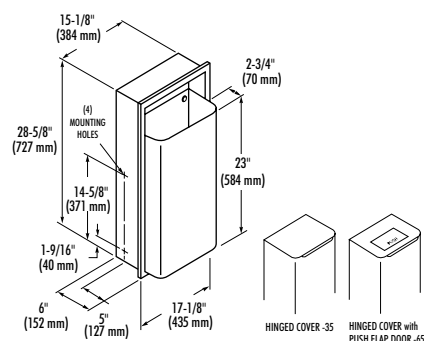**MODEL 346**

12-gallon, removable, stainless steel waste receptacle. Secured to cabinet with tumbler lock. Heavy-duty, reusable, 12-gallon liner available as an accessory. Order separately using part number **P11-004**.

**MODEL 346-35 Hinged Cover Unit****MODEL 346-65 Push-Flap Door Unit**


Rough wall opening  $15\frac{5}{8}''$  W x  $29\frac{1}{8}''$  H x 6" D. Receptacle projects  $2\frac{3}{4}''$ .

-10 **Semi-Recessed** 4" in wall, projects  $4\frac{3}{4}''$  from wall.

-11 **Surface-Mounted** Projects  $8\frac{3}{4}''$  from wall.



## SURFACE-MOUNTED

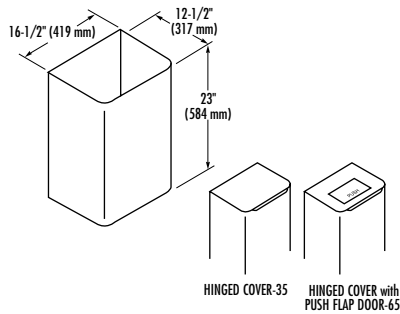


### MODEL 355

20.6-gallon, stainless steel waste receptacle. Heavy-duty, reusable, 20.6-gallon liner available as an accessory. Order separately using part number **P11-005**.

#### MODEL 355-35 Hinged Cover Unit

#### MODEL 355-65 Push-Flap Door Unit

Unit measures 16½" W x 23" H x 12½" D.

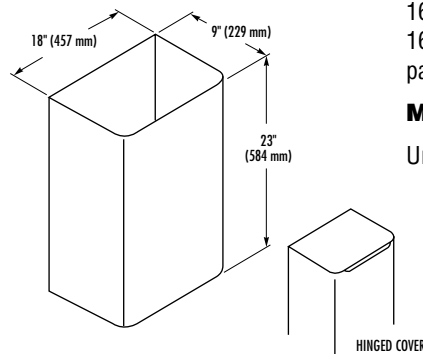


### MODEL 356

16.5-gallon, stainless steel waste receptacle. Heavy-duty, reusable, 16.5-gallon liner available as an accessory. Order separately using part number **P11-006**.


#### MODEL 356-35 Hinged Cover Unit

Unit measures 18" W x 23" H x 9" D.

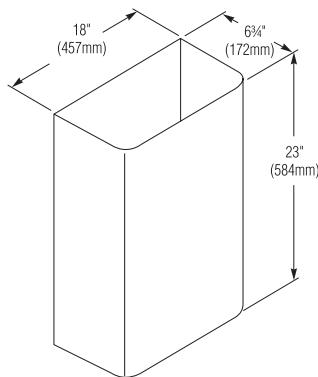

### MODEL 3565 Bradex®

12-gallon, stainless steel waste receptacle.




### MODEL 357 Bradex®

6.5-gallon, stainless steel waste receptacle. Heavy-duty, reusable, 6.5-gallon liner available as an accessory. Order separately using part number **P11-007**.

#### MODEL 357-35 Hinged Cover Unit


Unit measures 14" W x 18" H x 6" D.



**MODEL 359**

1.5-gallon, stainless steel waste receptacle.  
Utilizes disposable, wet-strength paper liner.


Unit measures 10<sup>5</sup>/<sub>8</sub>" W x 9<sup>1</sup>/<sub>8</sub>" H x 4<sup>1</sup>/<sub>2</sub>" D.

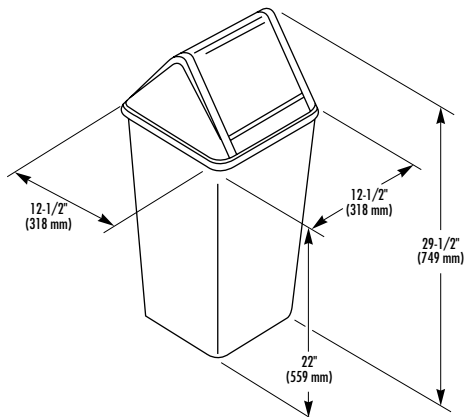**FREESTANDING****MODEL 377**

Freestanding, 13-gallon, stainless steel waste receptacle.  
Removable swing top.

**MODEL 377-37 Less Swing Top**


Unit measures 29<sup>1</sup>/<sub>2</sub>" H x 12<sup>1</sup>/<sub>2</sub>" SQ.

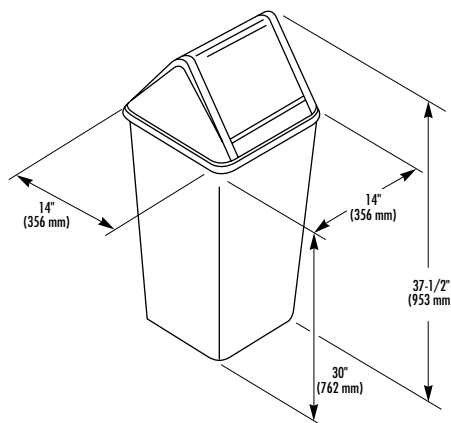**MODEL P15-025 Cover Only****MODEL 377-36**

Freestanding, 21-gallon, stainless steel waste receptacle.  
Removable swing top.

**MODEL 377-3637 Less Swing Top**

Unit measures 37<sup>1</sup>/<sub>2</sub>" H x 14" SQ.

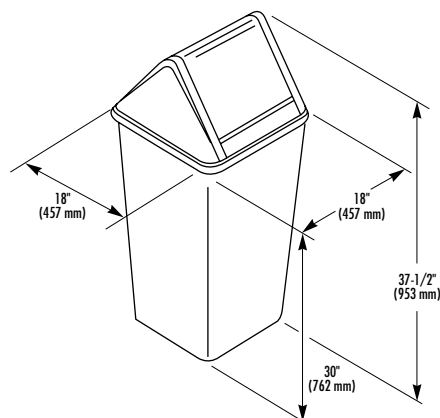**MODEL P15-098 Cover Only****MODEL 377-38**

Freestanding, 36-gallon, stainless steel waste receptacle.  
Removable swing top.


**MODEL 377-3738 Less Swing Top**

Unit measures 37<sup>1</sup>/<sub>2</sub>" H x 18" SQ.

**MODEL P15-195 Cover Only**

All Bradley dispensers combine smooth, contemporary styling with durable, vandal-resistant construction. Doors feature full-length piano hinges and tumbler locks for added security and maintenance ease. Configurations range from semi-recessed and recessed to surface-mounted and partition-mounted models.

## RECESSED AND SEMI-RECESSED

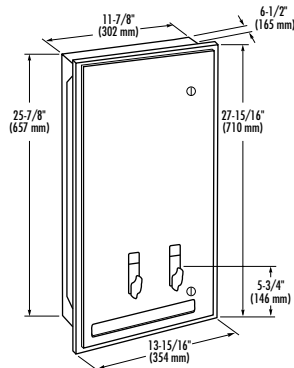


### MODEL 401

Recessed napkin/tampon vendor. Dispenses 30 napkins and 28 tampons. Slip-type flange permits full or partial recess installation or can be discarded for surface mounting. Coin mechanism may be replaced in the field without removing cabinet from wall. Specify coin choice (Free, 10¢, 25¢, 50¢, \$1.00).

Rough wall opening 12½" W x 26¾" H x 6" D.

-45 25¢ Coin Operation **Bradex®**

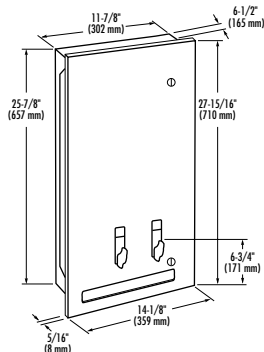


### MODEL 4017 Stainless Steel

Recessed napkin/tampon vendor. Dispenses 30 napkins and 28 tampons. Full-length piano hinge and two tumbler locks. Coin mechanism may be replaced in the field without removing cabinet from wall. Specify coin choice (Free, 10¢, 25¢, 50¢, \$1.00).

Rough wall opening 12½" W x 26¾" H x 6½" D.

-10 Semi-Recessed 4" in wall, projects 2" from wall.


-11 Surface-Mounted Projects 6¾" from wall.

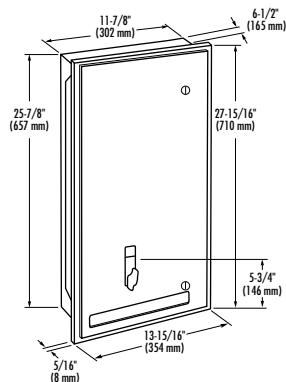

### MODEL 402

Recessed napkin vendor. Dispenses 30 napkins. Slip-type flange permits full or partial recess installation or can be discarded for surface mounting. Coin mechanism may be replaced in the field without removing cabinet from wall. Specify coin choice (Free, 10¢, 25¢, 50¢, \$1.00).

Rough wall opening 12½" W x 26¾" H x 6" D.




### MODEL 403

Recessed napkin/tampon vendor and disposal. Dispenses 30 napkins and 28 tampons. Removable leak-proof molded plastic waste receptacle with push-flap door. Slip-type flange permits full or partial recess installation or can be discarded for surface mounting. Coin mechanism may be replaced in the field without removing cabinet from wall. Specify coin choice (Free, 10¢, 25¢, 50¢, \$1.00).

Rough wall opening 12½" W x 42¾" H x 6" D.

-45 25¢ Coin Operation

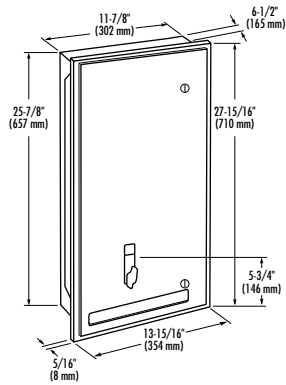


### MODEL 404

Recessed or semi-recessed condom vendor fabricated of stainless steel with exposed surfaces in architectural satin finish. Slip-type flange permits full or partial recess installation. Coin mechanism may be replaced in the field without removing cabinet from wall. Dispenses 120 condoms. 2¼" x 2¼" x ¼". Specify coin choice (Free, 10¢, 25¢, 50¢, \$1.00).

Rough wall opening 12½" W x 26¾" H x 6" D.

**-11 Surface-Mounted** Projects 6½" from wall.

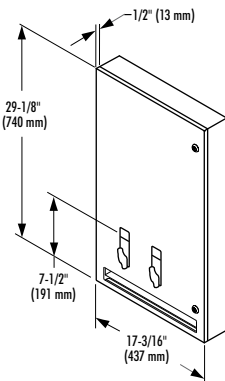

### MODEL 407

Recessed napkin/tampon vendor. Dispenses 18 napkins and 28 tampons. Shallow design permits unit to be fully recessed in a standard 4" deep wall. Coin mechanism may be replaced in the field without removing cabinet from wall. Specify coin choice (Free, 10¢, 25¢, 50¢, \$1.00).


Rough wall opening 16⅞" W x 27⅞" H x 4" D.

**-11 Surface-Mounted** Projects 4⅜" from wall.

**-45 25¢ Coin Operation Bradex®**

**-1145 Surface-Mounted with 25¢ Coin Operation Bradex®**

## SURFACE-MOUNTED




### MODEL 426

Surface-mounted napkin/tampon vendor. Dispenses 30 napkins and 28 tampons. Coin mechanism may be replaced in the field without removing cabinet from wall. Specify coin choice (Free, 10¢, 25¢, 50¢, \$1.00).

Unit measures 11⅞" W x 25⅞" H x 6½" D.

Mount 68" to 74" from finished floor.

**-45 25¢ Coin Operation Bradex®**

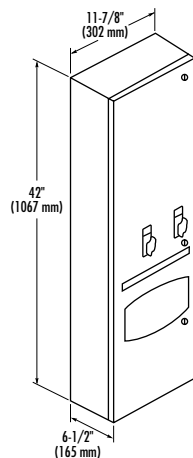


### MODEL 428

Surface-mounted napkin/tampon vendor and disposal. Dispenses 30 napkins and 28 tampons. Removable, leak-proof molded plastic waste receptacle with push-flap door. Coin mechanism may be replaced in the field without removing cabinet from wall. Specify coin choice (Free, 10¢, 25¢, 50¢, \$1.00).

Unit measures 11⅞" W x 42" H x 6½" D.

Mount 68" to 74" from finished floor.

**-45 25¢ Coin Operation**

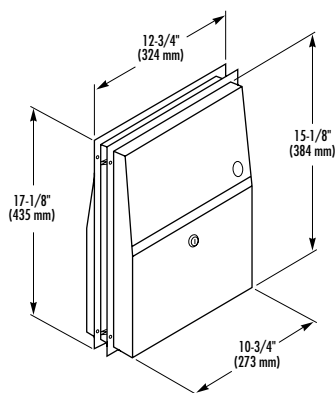


## MODEL 4721-15 Bradex®

Mounts in partition to serve two compartments. Two push-flap doors and stainless steel waste receptacle removable from one side. Flange adjusts for partitions from 1/2" to 1 1/4" thick. Uses disposable, wet-strength paper liner. 1.5 gallon capacity.

Partition opening 11" W x 15 3/8" H.

**Note:** If used with an odd number of compartments, use one Model 4722-15 in side wall of end compartment.

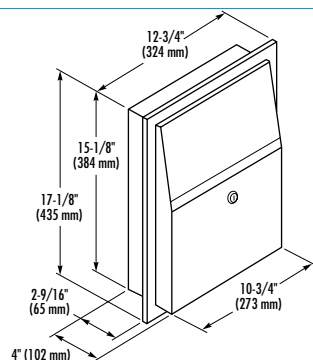


## MODEL 4722-1015

Semi-recessed napkin disposal unit with push-flap door and removable, stainless steel receptacle. Uses disposable, wet-strength paper liner.

Rough wall opening 11" W x 15 3/8" H x 2 1/2" D.


Unit projects 1 7/16" from finished wall.



## MODEL 4722-15 Bradex®

Surface-mounted napkin disposal unit with push-flap door and removable, stainless steel receptacle. Uses disposable, wet-strength paper liner.

Measures 10 3/4" W x 15 1/8" H x 4" D.

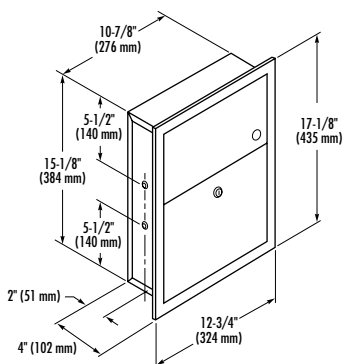

## MODEL 4731-15 Bradex®


Recess-mounted napkin disposal unit with push-flap door and removable, stainless steel receptacle. Uses disposable, wet-strength paper liner. May also be used as a small-capacity waste receptacle.

Rough wall opening 11 3/8" W x 15 3/8" H x 4" D.

Unit projects 1 7/16" from finished wall.



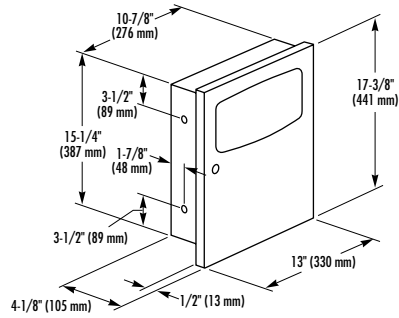

**MODEL 4737**

Recess-mounted napkin disposal with push-flap door. Removable, leak-proof, molded-plastic insert.


Rough wall opening 11 $\frac{3}{8}$ " W x 15 $\frac{3}{4}$ " H x 4" D.

**-10 Semi-Recessed** 2 $\frac{1}{8}$ " in wall, projects 2" from wall.

**-11 Surface-Mounted** Projects 4 $\frac{1}{8}$ " from wall.




**Note:** Only recessed and semi-recessed.

**MODEL 4781-15 Bradex®**

Surface-mounted napkin disposal unit has hinged cover and bottom with lock. Uses disposable, wet-strength paper liner.

Unit measures 8" W x 11 $\frac{1}{2}$ " H x 4 $\frac{1}{8}$ " D.

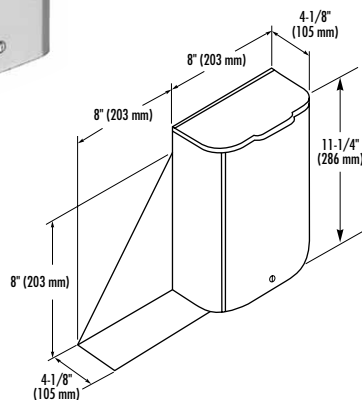**MODEL 4791-15**

Surface-mounted napkin disposal with integral shelf has hinged cover and bottom with tumbler lock. Shelf welded to waste receptacle. Uses disposable, wet-strength paper liner.

Unit measures 16" W x 11 $\frac{1}{4}$ " H x 4 $\frac{1}{8}$ " D.

# TOILET TISSUE HOLDERS 500 SERIES


Bradley Toilet Tissue Holders and Seat Cover Dispensers provide a complete selection of surface-mounted, recessed and partition-mounted units. Toilet Tissue Holders are available in single and multi-roll models, some with integral shelves.

## SURFACE-MOUNTED

### MODEL 5061

Controlled delivery with vandal-resistant locking device and constant roll tension. Exclusive adjusting mechanism accommodates rolls from 4¼" W to 4¾" W. Holds one standard core roll through 6" in diameter.

Unit measures 5⅞" W x 2¾" H x 5" D.

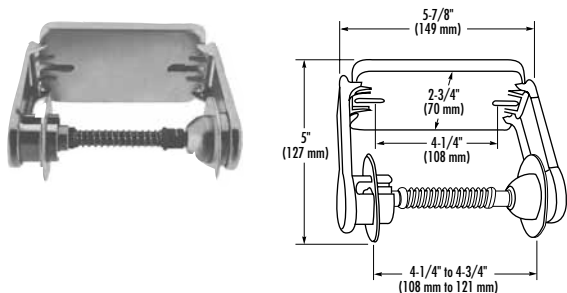



### MODEL 505 Single Roll **Bradex**®

### MODEL 522 Double Roll **Bradex**®

Controlled delivery. Chrome-plated, die-cast zinc. Unit features hinged arm with spring catch for filling and tension spring on fixed arm. Holds one (two) standard core roll(s) through 5" in diameter and 4½" wide.

Single roll unit measures 5½" W x 2⅜" H x 4¼" D.


Double roll unit measures 10½" W x 2⅞" H x 4¼" D.

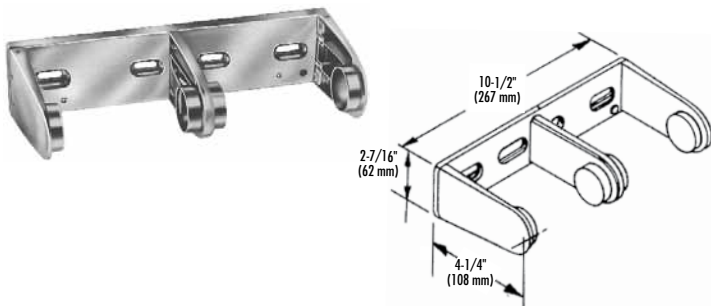
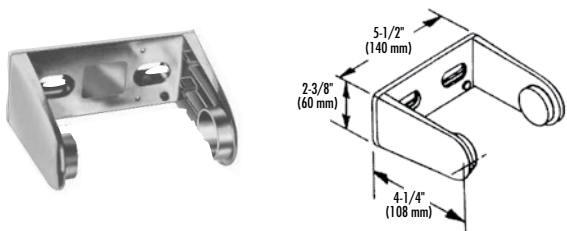


### MODEL 5053 Single Roll

Controlled delivery. Epoxy-coated aluminum. One-piece construction with hinged arm and snap lock, which is concealed by tissue roll. No removable parts.

Unit measures 5⅞" W x 2" H x 3⅞" D.

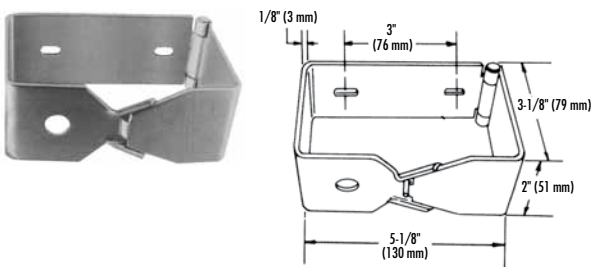


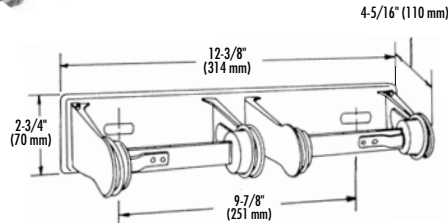**MODEL 5054 Single Roll Bradex®****MODEL 5224 Double Roll Bradex®**

Controlled delivery. Heavy-duty, chrome-plated steel. Vandal-resistant locking mechanism. Hinged arm for filling. Tension spring prevents free spinning of roll. Holds one (two) standard core roll(s) through 6" in diameter.

Single roll unit measures 6" W x 2 $\frac{3}{4}$ " H x 4 $\frac{1}{2}$ " D.


Double roll unit measures 12 $\frac{3}{8}$ " W x 2 $\frac{3}{4}$ " H x 4 $\frac{5}{16}$ " D.

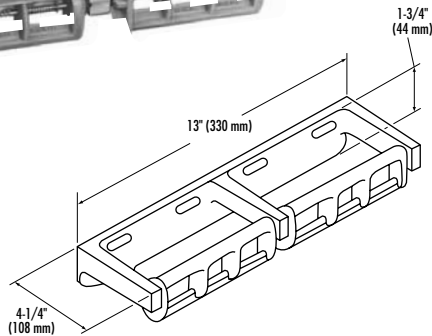**MODEL 5071 Single Roll****MODEL 5241 Double Roll Bradex®**

Controlled delivery. Die-cast aluminum with gray polystyrene spindle. Rotates  $\frac{1}{2}$  revolution for each dispensing operation and returns to original position. Spring allows spindle to be released for filling. Holds one (two) standard core roll(s) through 5 $\frac{1}{2}$ " in diameter.

Single roll unit measures 6 $\frac{1}{2}$ " W x 1 $\frac{3}{4}$ " H x 4" D.

Double roll unit measures 13" W x 1 $\frac{3}{4}$ " H x 4 $\frac{1}{4}$ " D.

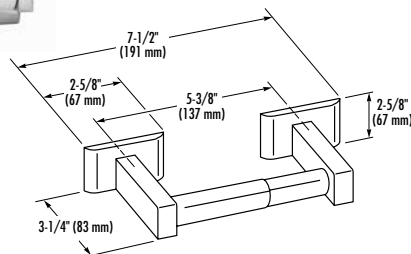
**-50 Non-controlled Delivery****MODEL 508\***

Non-controlled delivery. Chrome-plated, cast brass with chrome-plated plastic spindle.

Unit measures 7 $\frac{1}{2}$ " W x 2 $\frac{5}{8}$ " H x 3 $\frac{1}{4}$ " D.

\* Theft-resistant spindle available (-52).



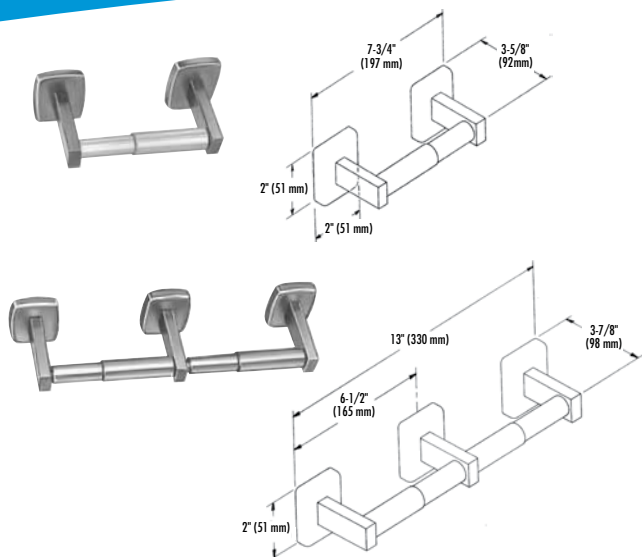

**MODEL 5084** Single Roll\* **Bradex®**

**MODEL 5234** Double Roll\* **Bradex®**

Non-controlled delivery. Constructed of satin-finish stainless steel. Unit has individually mounted arms and free-turning roller that telescopes for filling. Holds standard core rolls through 5½" in diameter.


Single roll unit measures 7¾" W x 2" H x 3⅝" D.

Double roll unit measures 13" W x 2" H x 3⅞" D.

**MODEL 5085** Unit with Bright Polish Finish Single Roll\* **Bradex®**

**MODEL 5235** Unit with Bright Polish Finish Double Roll\* **Bradex®**

\* Theft-resistant spindle available (-52).

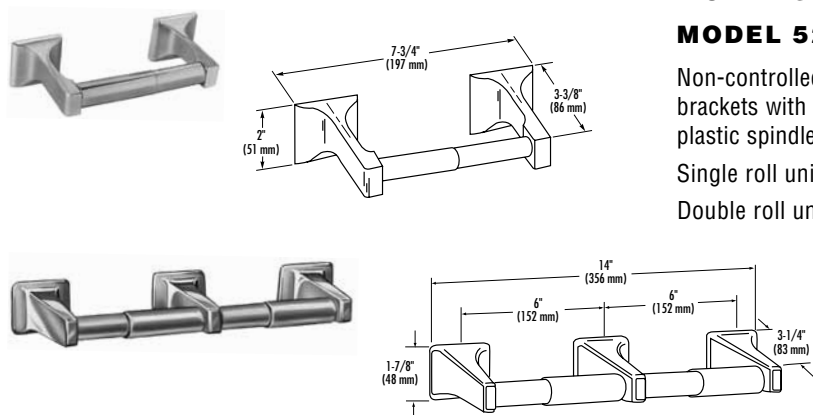

**MODEL 508-32** Single Roll\* **Bradex®**

**MODEL 523** Double Roll\*

Non-controlled delivery. Highly polished, chrome-finish Zamac brackets with plated-steel mounting bracket and chrome-plated plastic spindle.

Single roll unit measures 7¾" W x 2" H x 3⅝" D.

Double roll unit measures 14" W x 1⅞" H x 3¼" D.

\* Plastic Roller (-51) 508-32 only.


\* Theft-resistant spindle available (-52).



## THEFT-RESISTANT SPINDLE (-52)

Available as an option for Bradley surface-mounted and recessed toilet tissue holders.

Option 52 can be ordered as a replacement part: #S01-459.

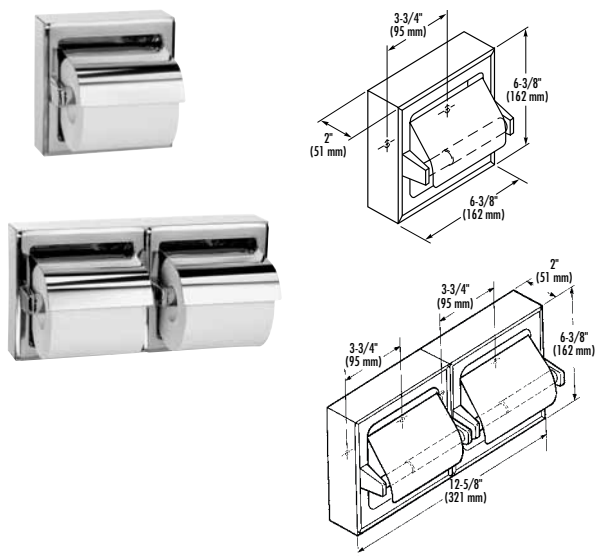

**MODEL 5106** Single Roll\* **Bradex®**

**MODEL 5126** Double Roll\* **Bradex®**


Surface-mounted, non-controlled delivery with hinged hood. Fabricated of bright polished stainless steel and chrome-plated plastic spindle. Free-turning rollers. Holds standard core rolls through 5½" in diameter.

Single roll unit measures 6⅝" W x 6⅝" H x 2" D.

Double roll unit measures 12⅝" W x 6⅝" H x 2" D.

\* Theft-resistant spindle available (-52).

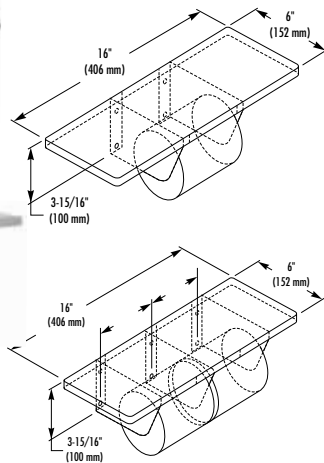


**MODEL 5262 Single Roll****MODEL 5263 Double Roll *Bradex***

Toilet tissue dispenser with shelf. Non-controlled delivery. Fabricated of satin-finish stainless steel. Spindle(s) of ABS plastic with concealed spring. Standard core 6" diameter toilet tissue roll(s).


Single roll unit measures 16" W x 3<sup>15</sup>/<sub>16</sub>" H x 6" D.

Double roll unit measures 16" W x 3<sup>15</sup>/<sub>16</sub>" H x 6" D.

**MODEL 5424 *Bradex***


Surface-mounted, jumbo-roll, toilet tissue holder. Satin-finish stainless steel. Door swings down to replenish tissue roll and is secured with tumbler lock. Holds one roll (up to 10" diameter) of 1<sup>1</sup>/<sub>2</sub>" or 2<sup>1</sup>/<sub>8</sub>" diameter core toilet tissue minimum. Refill indicator slot reveals tissue level.

Unit measures 10<sup>13</sup>/<sub>16</sub>" W x 10<sup>13</sup>/<sub>16</sub>" H x 4<sup>3</sup>/<sub>4</sub>" D.

**MODEL 5425 *Bradex***

Surface-mounted, dual-jumbo-roll, toilet tissue holder. Satin-finish stainless steel. Bottom hinged front panel is secured with tumbler lock. Holds two standard 9" rolls. Core adapters accept 2<sup>1</sup>/<sub>4</sub>" or 3" diameter core tissue minimum. Inside mechanism of durable ABS has sliding bottom access panel to allow dispensing from one roll at a time. Non-controlled delivery.

Unit measures 21" W x 11<sup>3</sup>/<sub>8</sub>" H x 6<sup>1</sup>/<sub>2</sub>" D.


**MODEL 5402 *Bradex***

Surface-mounted, dual-roll, toilet tissue holder. Satin-finish stainless steel. Vandal-resistant, polyethylene spindles. Bottom hinged front panel is secured with tumbler lock. Holds two standard rolls up to 4<sup>3</sup>/<sub>4</sub>" in diameter, 4<sup>1</sup>/<sub>2</sub>" W. Non-controlled delivery.

Unit measures 5<sup>9</sup>/<sub>16</sub>" W x 10<sup>3</sup>/<sub>8</sub>" H x 5" D.



## RECESS MOUNTED




### MODEL 5104 Satin Finish\* (shown)

Recess-mounted toilet tissue holder with non-controlled delivery. Recessed housing and projecting parts of satin finish stainless steel. Free-turning, chrome-plated plastic roller telescopes for filling. Holds one standard core roll up to 5" in diameter.

**MODEL 5102 Unit Housing and Projecting Parts of Bright Polished Stainless Steel\*** Rough wall opening 5¼" W x 5¼" H x 2" D.

**MODEL 510 Chrome-Plated Brass Unit\*** Rough wall opening 5¼" W x 5¼" H x 2" D.

\*Theft-resistant spindle available (-52).



### MODEL 5103 Single Roll\*


### MODEL 5123 Double Roll\*

Recess-mounted toilet tissue holder with hinged hood and non-controlled delivery. Housing brackets and hood fabricated of bright polished stainless steel. Chrome-plated plastic spindle. Holds one (two) standard core roll(s) through 5½" in diameter.

Single roll rough wall opening 5" W x 4⅞" H x 1⅞" D.

Double roll rough wall opening 11¾" W x 5¼" H x 2" D.

\*Theft-resistant spindle available (-52).

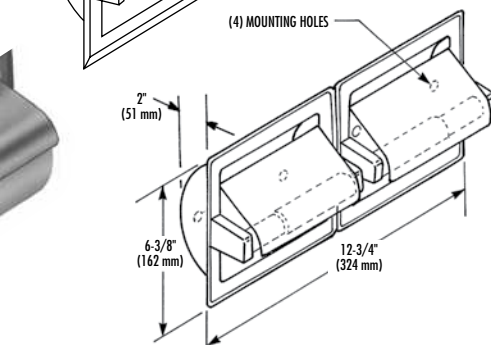


### MODEL 5105\*

Recess-mounted toilet tissue holder with non-controlled delivery. Housing fabricated of bright polished stainless steel. Posts are fabricated of chrome-plated zinc. Spindle fabricated of chrome-plated plastic. Holds one standard core toilet tissue roll through 5" in diameter, plus one spare roll behind spindled roll.

Rough wall opening 5¼" W x 5¼" H x 4" D.

\*Theft-resistant spindle available (-52).

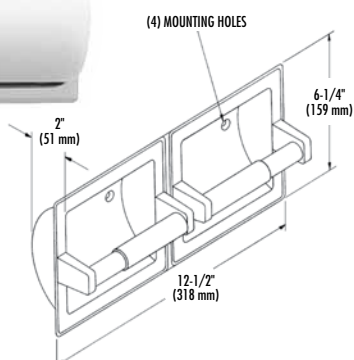


### MODEL 5124\*

Recess-mounted, dual-roll, toilet tissue holder with non-controlled delivery. Satin-finish stainless steel. Chrome-plated, zinc die-cast projecting parts. Free-turning, chrome-plated plastic rollers. Holds two standard core rolls through 5" in diameter.

**MODEL 5125 Unit with Bright Polish Finish\***

Rough wall opening 11¾" W x 5¼" H x 2" D.

\*Theft-resistant spindle available (-52).

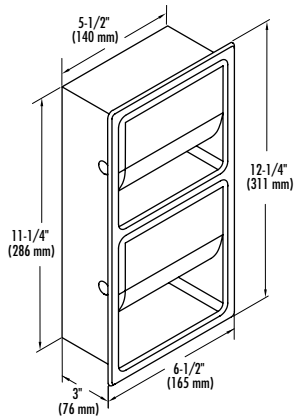


### MODEL 5127 *Bradex*® **NEW!**

Recess-mounted, dual roll, non-controlled delivery with hinged hood toilet tissue holder. Fabricated of bright polished stainless steel and chrome-plated plastic spindle. Free-turning rollers. Holds standard core through 5½" diameter.

Unit measures 6½" W x 12¼" H x 3" D.


Rough wall opening 6" W x 11¾" H x 3¼" D.

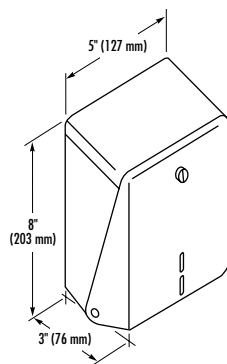

### MODEL 515

Dispenses sheet tissue. Satin-finish stainless steel. Front panel hinged at bottom. Vandal-resistant lock.

Unit measures 5" W x 8" H x 3" D.

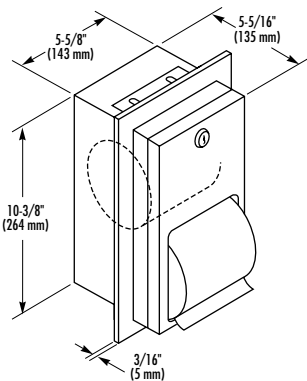


### MODEL 5412 *Bradex*®

Recess-mounted, dual-roll, toilet tissue holder. Satin-finish stainless steel. Vandal-resistant polyethylene spindles. Bottom hinged front panel is secured with tumbler lock. Holds two standard rolls up to 4¾" in diameter, 4½" W. Non-controlled delivery.

Unit measures 7⅝" W x 12⅜" H x 5⅝" D.

Rough wall opening 5¾" W x 10½" H x 4" D.

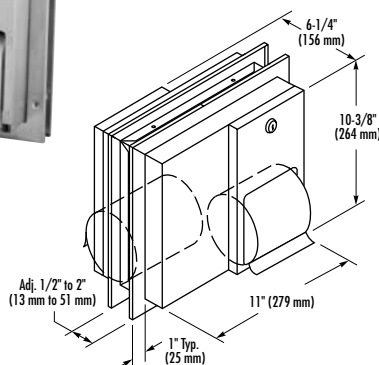

### MODEL 5422 *Bradex*®

Partition-mounted, dual-roll, toilet tissue holder. Serves two adjoining compartments. Satin-finish stainless steel. Vandal-resistant polyethylene spindles. Bottom hinged front panel is secured with tumbler lock. Holds two standard rolls up to 4¾" in diameter, 4½" W. Non-controlled delivery.

Unit measures 13" W x 12⅜" H x 5⅝" D.


Partition opening 11⅜" W x 10⅝" H.





# COMBINATION UNITS


Bradley Seat Cover Dispenser/Combination units are fabricated of 18-gauge stainless steel and are secured with full-length piano hinges and tumbler locks for the ultimate blend of style and vandal resistance. When doors are locked, contents and interior areas are hidden and protected. Partition-mounted units serve two compartments at the same time.



## MODEL 591 Bradex®

Partition-mounted combination unit serves two compartments. Dispenses 1,000 standard single or half-fold paper toilet seat covers. Holds four standard core rolls through 5¼" in diameter. Waste receptacle capacity .88 gallons. Non-controlled delivery.

Partition opening 15½" W x 28⅞" H.




## MODEL 5911

Partition-mounted combination unit serves two compartments. Mounts with one side flush against partition allowing clearance for grab bar in barrier-free compartment. Waste receptacle capacity .88 gallons. Holds four standard core rolls through 5¼" in diameter. Non-controlled delivery. Servicing of unit accomplished from non-barrier-free compartment.

Partition opening 15½" W x 28⅞" H.

-69 Reverse Door Option



## MODEL 5912 Bradex®

Recess-mounted combination unit. Dispenses 1,000 standard single or half-fold paper toilet seat covers. Holds two standard core rolls through 5¼" in diameter. Non-controlled delivery. Waste receptacle capacity 1.0 gallon.

-10 Semi-Recessed


Projects 1¼" from wall. Not for use with grab bar.

-11 Surface-Mounted

Projects 4¼" from wall. Not for use with grab bar.

Rough wall opening 15½" W x 28⅞" H x 4" D.

-69 Reverse Door Option




## MODEL 592

Partition-mounted combination unit serves two compartments. Dispenses 1,000 standard single or half-fold paper toilet seat covers. Holds four standard core rolls through 5¼" in diameter. Non-controlled delivery.

Partition opening 15½" W x 28⅞" H.









### MODEL 5921

Partition-mounted combination unit serves two compartments. Mounts with one side flush against partition allowing clearance for grab bar in barrier-free compartment. Holds four standard core rolls through 5¼" in diameter. Servicing of unit accomplished from non-grab-bar compartment. Non-controlled delivery.

Partition opening 15½" W x 28⅞" H.

–69 Reverse Door Option



### MODEL 5922 Bradex®

Recess mounted. Dispenses 1,000 standard single or half-fold paper toilet seat covers. Holds two standard core rolls through 5¼" in diameter. Non-controlled delivery.

Rough wall opening 15½" W x 28⅞" H x 4" D.


–10 Semi-Recessed

2⅞" in wall, projects 2" from wall. Not for use with grab bar.

–11 Surface-Mounted

Projects 4¼" from wall. Not for use with grab bar.



–69 Reverse Door Option



### MODEL 594

Partition-mounted combination unit serves two compartments. Dispenses four standard core rolls through 5¼" in diameter, two rolls per compartment. Non-controlled delivery. Waste receptacle capacity 1.0 gallon.

Partition opening 15½" W x 18¼" H.



### MODEL 5932

Recess-mounted combination unit. Dispenses 1,000 standard single or half-fold paper toilet seat covers. Waste receptacle capacity 1.7 gallons.


Rough wall opening 15½" W x 28⅞" H x 4" D.

–10 Semi-Recessed

–11 Surface-Mounted



# COMBINATION UNITS



## MODEL 5942

Recess-mounted combination unit. Dispenses two standard core rolls through 5¼" in diameter. Non-controlled delivery. Napkin disposal has self-closing, push-flap door. Waste receptacle capacity 1.0 gallon.

Rough wall opening 15⅝" W x 18¼" H x 4¼" D.

### -10 Semi-Recessed

¾" in wall, projects 1¼" from wall.

### -11 Surface-Mounted

Projects 4½" from wall.

### -69 Reverse Door Option




## SEAT COVER DISPENSERS

## MODEL 582

Partition-mounted seat cover dispenser serves two compartments. Dispenses 1,000 single-fold or half-fold paper seat covers.

Partition opening 11" H x 15⅝" W.

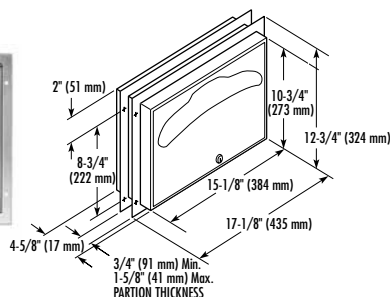

## MODEL 5831 Bradex®


Surface-mounted seat cover dispenser. Dispenses 250 standard single or half-fold paper toilet seat covers.

Unit measures 15¾" W x 11" H x 2" D.

### MODEL 583 (shown) Bradex®

Unit dispenses 500 toilet seat covers.


Unit measures 15" W x 11½" H x 2⅝" D.



## MODEL 584

Recess-mounted seat cover dispenser. Dispenses 500 standard single or half-fold paper toilet seat covers.


Rough wall opening 15¾" W x 11⅝" H x 2¾" D.



## MODEL 5847 Bradex® Stainless Steel

Recess-mounted seat cover dispenser. Dispenses 500 standard single or half-fold toilet seat covers.

Rough wall opening 15⅝" W x 11¼" H x 2¾" D.

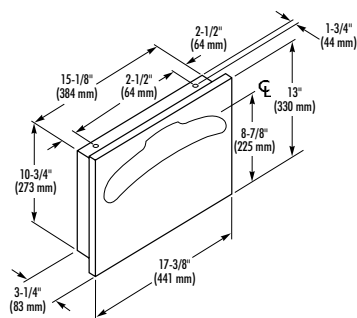

Bradley Soap Dispensers are constructed of stainless steel with exposed surfaces in architectural satin finish. Units feature one-piece, stainless steel flange of welded construction with seamless corners, burr-free edges and 1/4" return to conceal minor wall irregularities. Tumbler locks keyed alike to companion Bradley units.

## RECESSED

### MODEL 643

Recessed, horizontal, liquid soap dispenser. Stainless steel cabinet with plastic soap vessel. Buna-N check valves to prevent leaking. Slides open for filling. Holds 32 oz. liquid soap. Sight gauge on dispenser. ADA compliant. Requires less than 5 lbs. of force to operate.


Rough wall opening 8 1/2" W x 4 1/2" H x 4" D.

### MODEL 644 Vertically Mounted Unit w/ Stainless Steel Soap Vessel

Rough wall opening 4 1/2" W x 8 1/2" H x 4" D.

### MODEL 646 Vertically Mounted Unit w/ Plastic Steel Soap Vessel


Rough wall opening 4 1/2" W x 8 1/2" H x 4" D.

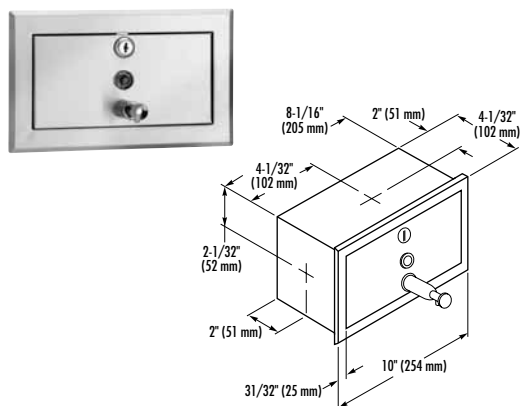

### MODEL 6437 Stainless Steel

Recess-mounted liquid soap dispenser of satin-finish stainless steel. Plastic soap vessel holds 32 oz. of liquid soap. Sight gauge on dispenser. ADA compliant. Requires less than 5 lbs. of force to operate.

Rough wall opening 8 1/2" W x 4 1/2" H x 4" D.

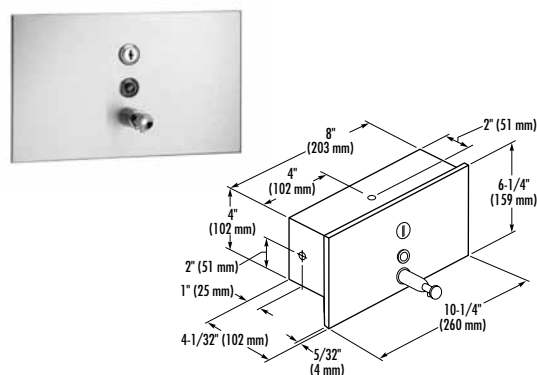

## LAVATORY MOUNTED

### MODEL 6315-KT0000 Bradex®

(Soap Dispenser Starter Kit: 6315, 1 bottle of soap, 4 D-Cell batteries) Sensor-operated soap dispenser with 5 1/2" spout length. ADA compliant. Reliable Infrared Metering Activation. LED light indicators for low battery and low soap refill. Spout fabricated of chrome-plated plastic. Requires 1" diameter hole in lavatory or countertop 1 1/2" from edge of sink. (Batteries not included.)

### MODEL 6315 Soap Dispenser Only

#### AC ADAPTOR


**P19-231F** Single soap dispenser adaptor

**P19-231G** Adaptor for up to 4 dispensers (need P19-231H for each dispenser)


**P19-231H** Wire assembly (to be used with P19-231G which requires 1 of these for each dispenser to be hooked up); up to 4 per P19-231G adaptor

**P19-232A** 2,000-shot non-refillable bottle

**P19-232B** 1,000-shot non-refillable bottle

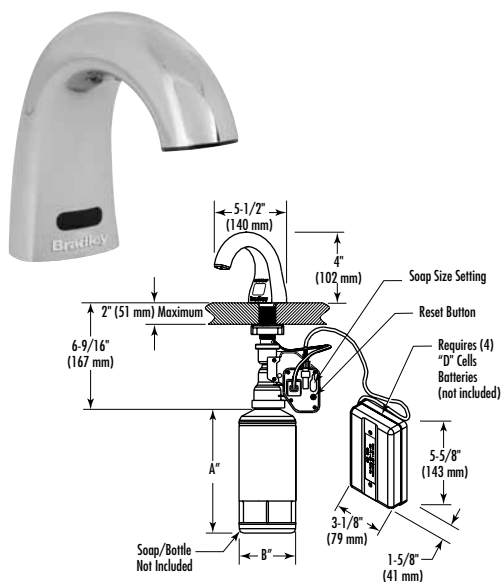

## LAVATORY MOUNTED

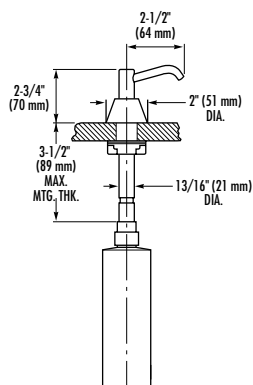

### MODEL 6322


Liquid soap dispenser with 2½" spout length. Polyethylene container holds 16 oz. liquid soap. Stainless steel plunger and spout. Special key provided. Requires 1" diameter mounting hole. Shank length 4¾" – can be shortened in field. ADA compliant. Requires less than 5 lbs. of force to operate. Spout is fixed.

### MODEL 6322-67

Unit with 16-oz. stainless steel soap container.

### MODEL 6322-68

Unit with 32-oz. polyethylene soap container.

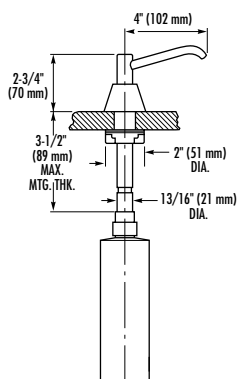

### MODEL 6324 *Bradex*®


Liquid soap dispenser with 4" spout length and ¾" shank. Polyethylene container holds 16 oz. liquid soap. ADA compliant. Requires less than 5 lbs. of force to operate. Spout is fixed.

### MODEL 6324-67

Unit with 16-oz. stainless steel soap container.

### MODEL 6324-68 *Bradex*®

Unit with 32-oz. polyethylene soap container.

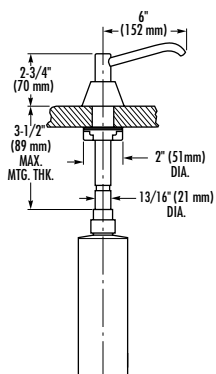

### MODEL 6326 *Bradex*®


Liquid soap dispenser with 6" spout length. Polyethylene container holds 16 oz. liquid soap. ADA compliant. Requires less than 5 lbs. of force to operate. Spout is fixed.

### MODEL 6326-67

Unit with 16-oz. stainless steel soap container.

### MODEL 6326-68 *Bradex*®


Unit with 32-oz. polyethylene soap container.

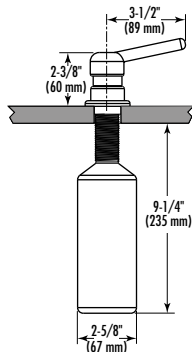

### MODEL 6334


Liquid soap dispenser with 3½" spout length. Polyethylene container holds 16 oz. liquid soap. Chrome plated brass plunger and spout. Special key provided. Required 1¼" diameter hole in lavatory or countertop. ADA compliant. Requires less than 5 lbs. of force to operate.

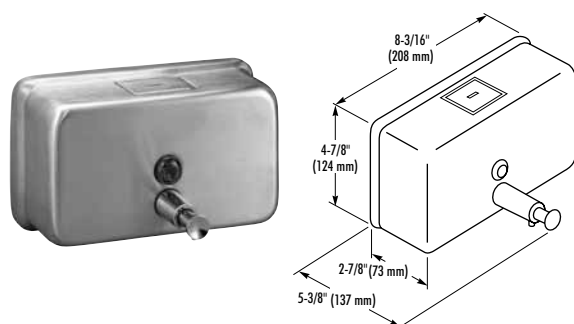

**SURFACE-MOUNTED****MODEL 6542 Horizontal Bradex®**


Liquid, tank-type soap dispenser of satin finish stainless steel. Holds 40 oz. liquid soap. Push-in-type valve. Concealed mounting. ADA compliant. Requires less than 5 lbs. of force to operate.

Unit measures 8 $\frac{3}{16}$ " W x 4 $\frac{7}{8}$ " H x 2 $\frac{7}{8}$ " D. Valve projects 2 $\frac{1}{2}$ " from wall.

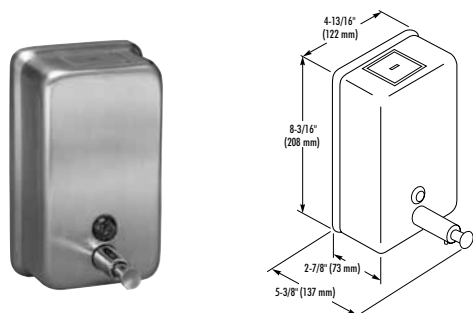**MODEL 6562 Vertical Bradex®**


Liquid, tank-type soap dispenser of satin finish stainless steel. Holds 40 oz. liquid soap. Push-in-type valve. Concealed mounting. ADA compliant. Requires less than 5 lbs. of force to operate.

Unit measures 4 $\frac{13}{16}$ " W x 8 $\frac{3}{16}$ " H x 2 $\frac{7}{8}$ " D. Valve projects 2 $\frac{1}{2}$ " from wall.

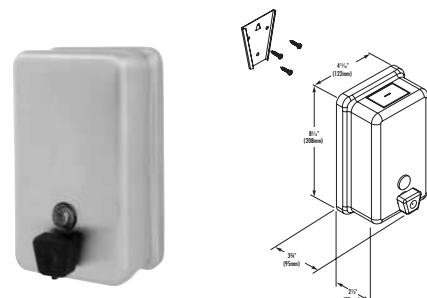**MODEL 6563 Vertical Bradex®**


Liquid, tank-type soap dispenser of stainless steel with Black ABS Plastic valve. Holds 40 oz. liquid soap. Push-in-type valve. Surface mounting. ADA compliant. Requires less than 5 lbs. of force to operate. Ideal for higher end hospitality and other commercial restrooms.

Unit measures 4 $\frac{13}{16}$ " W x 8 $\frac{3}{16}$ " H x 2 $\frac{7}{8}$ " D. Valve projects 2 $\frac{1}{2}$ " from wall.

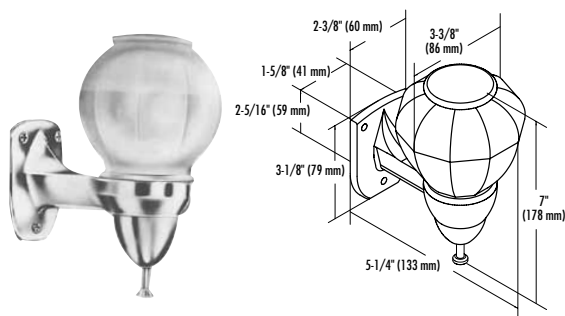**MODEL 648**

Liquid soap dispenser features chrome-plated bracket, translucent polyethylene globe and push-up-type valve with corrosion-resistant components and vacuum-flow control. Holds 16 oz. liquid soap. Swivels for filling.

Unit measures 3 $\frac{3}{8}$ " W x 7" H x 5 $\frac{1}{4}$ " D.

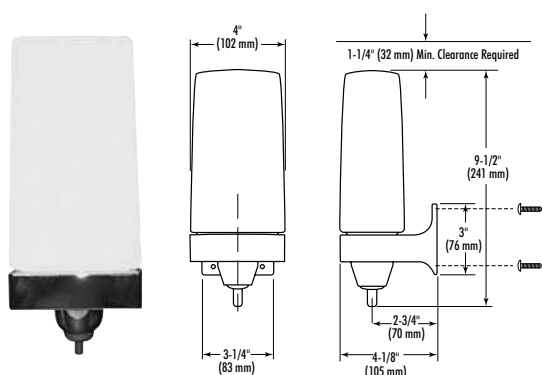**MODEL 6481 (shown) Unit with No Swivel****MODEL 650****MODEL 6501 Bradex®**


Liquid soap dispenser with push-up-type valve. Translucent polyethylene globe, chrome-plated ABS bracket. Valve is black ABS with stainless steel spring.

**MODEL 650**

Unit measures 4" W x 9 $\frac{1}{2}$ " H x 4 $\frac{1}{8}$ " D, holds 32 oz. (diagram shown).

**MODEL 6501**

Unit measures 4" W x 7 $\frac{5}{8}$ " H x 4 $\frac{1}{8}$ " D, holds 24 oz.

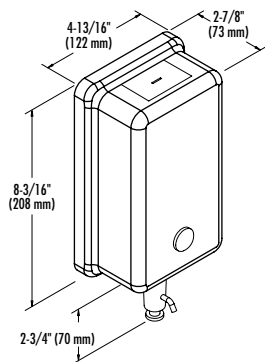

## MODEL 655

Liquid, tank-type soap dispenser with vertical valve. Fabricated of stainless steel with exposed surfaces in architectural satin finish. Holds 40 oz. liquid soap. ADA compliant. Requires less than 5 lbs. of force to operate.

Unit measures 4 $\frac{13}{16}$ " W x 8 $\frac{3}{16}$ " H x 2 $\frac{7}{8}$ " D.





## MODEL 657

Liquid soap dispenser. Chrome-plated brass with plastic container and chrome-plated plastic assembly. Holds 12 oz. liquid soap. Concealed mounting.

Unit measures 3 $\frac{3}{16}$ " W x 6" H x 5 $\frac{7}{8}$ " D (from wall to end of valve).



Valve projects 2 $\frac{1}{16}$ " from wall.

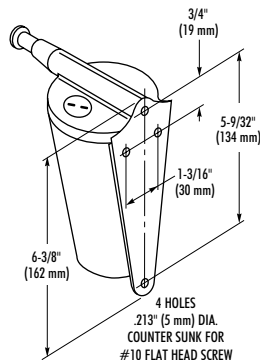

## MODEL 658-30

Powdered soap dispenser of polished and satin finish stainless steel. Stainless push knob, springs and discharge mechanism. Holds 32 oz. powdered soap. Locked top covers filler hole.


Unit measures 4 $\frac{1}{2}$ " W x 7 $\frac{1}{8}$ " H x 4 $\frac{5}{8}$ " D.



**SURFACE-MOUNTED****MODEL 6583**


Powdered soap dispenser of satin finished stainless steel with chrome-plated brass valve. Holds 32 oz. powdered soap. Locked top covers filler hole. Concealed mounting.

Unit measures 4 $\frac{7}{8}$ " W x 8 $\frac{3}{16}$ " H x 2 $\frac{7}{8}$ " D.

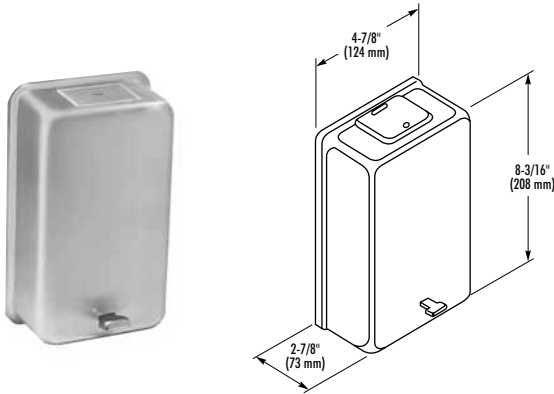**MODEL 661**

Shelf-type, liquid soap dispenser. Stainless steel with architectural satin finish. Chrome-plated brass and ABS valve. 80 oz. liquid soap reservoir. Vandal-resistant sight gauge. Hinged shelf with concealed latch raises for filling. ADA compliant. Requires less than 5 lbs. of force to operate.

Unit measures 17 $\frac{1}{2}$ " W x 3 $\frac{1}{4}$ " H x 5 $\frac{1}{4}$ " D.

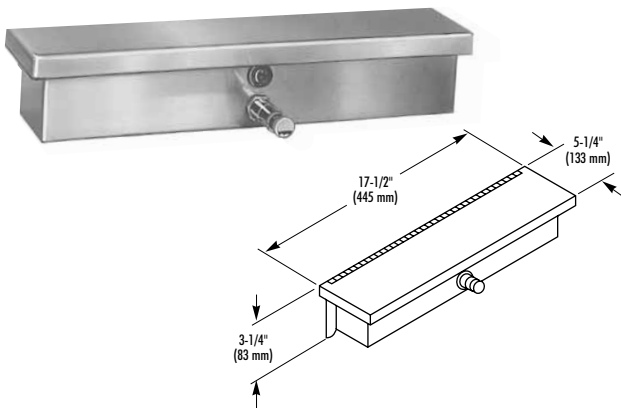
**MODEL 662**

Unit with two liquid soap valves to mount between two lavatories.

**MODEL 6531**

Stainless steel with architectural satin finish. Locked cover removes for filling. Holds 44 oz. liquid soap. Push-in-type valve delivers measured amount of liquid soap.


Unit measures 5 $\frac{1}{8}$ " W x 7 $\frac{1}{2}$ " H x 3" D.

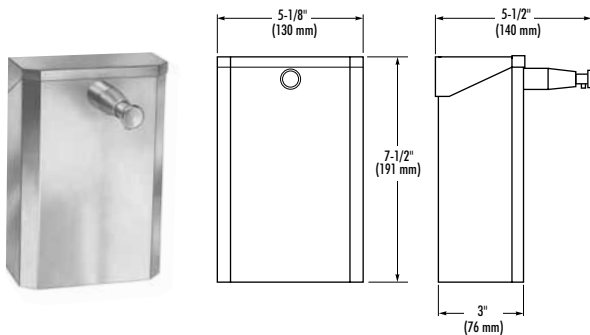**MODEL 6843**

Foot-operated, medical soap dispenser. Housing of ABS plastic with stainless steel spout. Holds 32 oz. and unscrews for filling. Foot pump of molded rubber with anti-slip base and 8' vinyl tubing dispenses surgical liquid soaps, detergents and aseptic solutions with depression of pedal.

Unit measures 11 $\frac{1}{2}$ " H x 4 $\frac{1}{2}$ " D.


Spout projects 9" from wall.

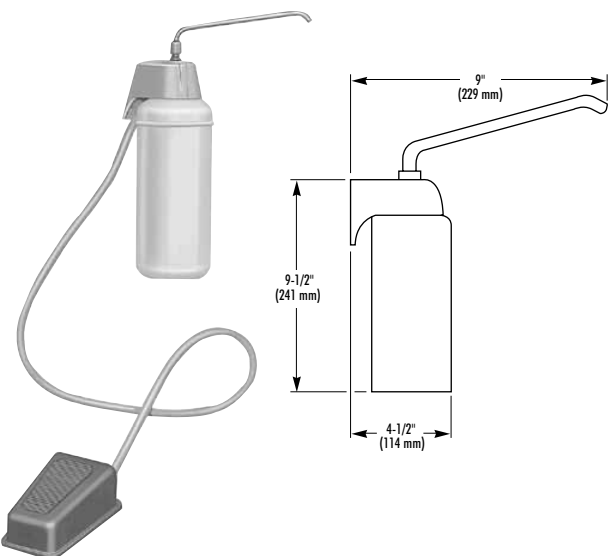



Bradley Mirrors are made of first quality  $\frac{1}{4}$ " float glass for a clean, contemporary look and feature triple silvered, electro-copper plating and an exclusive backing for long-lasting use. Guaranteed against silver spoilage for 15 years. Frames fabricated of stainless steel with theft-resistant mounting brackets. Angle Frame and Channel Frame Mirrors feature one-piece, roll-formed frames for strength. Choose Angle Frame style for welded, polished corners and Channel Frame style for neatly mitered corners. Frames guaranteed 15 years against corrosion.

**Optional Features are listed on page 39.**




## MODEL 780

Angle framed mirror.  $\frac{3}{4}$ " x  $\frac{3}{4}$ " satin finish, stainless steel angle frame with welded and polished corners.  $\frac{1}{4}$ " thick glass. Wall hanger of 18-gauge steel provides theft-resistant mounting. Galvanized steel back plate with shock-absorbing, waterproof filler.

Standard or barrier-free applications.

*See technical data catalog for **Bradex**® sizes.*

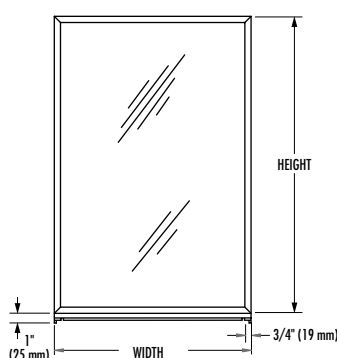


## MODEL 7805

Angle framed mirror with shelf.  $\frac{3}{4}$ " x  $\frac{3}{4}$ " satin finish stainless steel angle frame with welded and polished corners.  $\frac{1}{4}$ " thick glass.  $5\frac{1}{2}$ " W satin finish stainless steel shelf welded to frame. Shelf has flanged front and sides. Wall hanger of 18-gauge steel provides vandal- and theft-resistant mounting. Galvanized steel back plate with shock-absorbing, waterproof filler.

Standard or barrier-free applications.

*See technical data catalog for **Bradex**® sizes.*




## MODEL 781

Channel framed mirror.  $\frac{3}{4}$ " x  $\frac{3}{4}$ " x  $\frac{7}{16}$ " channel frame of stainless steel with bright annealed finish. Neatly mitered corners.  $\frac{1}{4}$ " thick glass. Wall hanger of 18-gauge steel provides vandal- and theft-resistant mounting. Galvanized steel back plate with shock-absorbing, waterproof filler.

Standard or barrier-free applications.

*See technical data catalog for **Bradex**® sizes.*

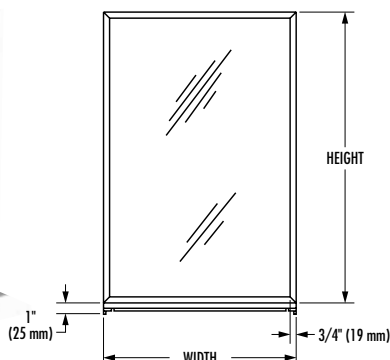

## MODEL 7815

Channel-framed mirror with shelf.  $\frac{3}{4}$ " x  $\frac{3}{4}$ " x  $\frac{7}{16}$ " frame of stainless steel with bright annealed finish. Neatly mitered corners.  $\frac{1}{4}$ " thick glass.  $5\frac{1}{2}$ " W satin finish stainless steel shelf welded to frame. Wall hanger of 18-gauge steel provides vandal- and theft-resistant mounting. Galvanized steel back plate with shock-absorbing, waterproof filler.

Standard or barrier-free applications.

*See technical data catalog for **Bradex**® sizes.*






**TILT MIRRORS****MODEL 740**

Fixed-angle, tilt frame of satin finish stainless steel.  $\frac{3}{4}$ " x  $\frac{3}{4}$ " frame with welded and polished corners.  $\frac{1}{4}$ " thick glass. Theft-resistant mounting bracket.


Standard or barrier-free applications.

See technical data catalog for projection from wall and **Bradex®** sizes.

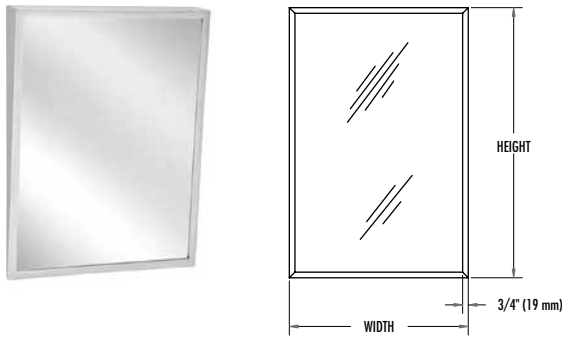**MODEL 740S**


Fixed-angle, tilt mirror with integral welded stainless steel shelf.  $\frac{3}{4}$ " x  $\frac{3}{4}$ " frame with welded and polished corners.  $\frac{1}{4}$ " thick glass. Shelf is  $5\frac{1}{2}$ " W, welded to frame, flanged front and sides with welded, polished corners. Theft-resistant mounting bracket.

Standard or barrier-free applications.

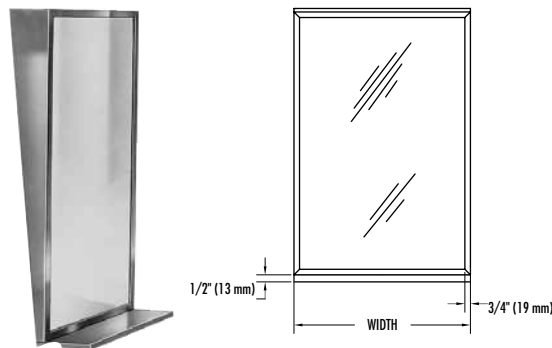**MODEL 782**

Adjustable tilt mirror.  $\frac{3}{4}$ " x  $\frac{3}{4}$ " frame is bottom hinged and has welded, polished corners.  $\frac{1}{4}$ " thick glass. Two friction elbow hinges on top allow unit to tilt up to maximum 6" from wall. Standard projection is 4".

Standard or barrier-free applications.

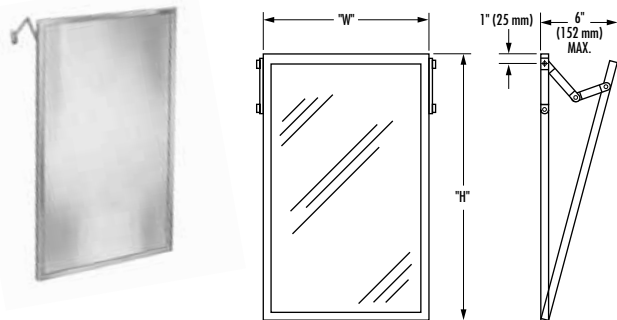**FRAMELESS MIRRORS****MODEL 747**


Frameless  $\frac{1}{4}$ " thick glass mirror. Metal clip fasteners.

Standard or barrier-free applications.

**MODEL 7471 Plastic Rosette Fasteners**

Standard or barrier-free applications. Only available in standard glass.

See technical data catalog for **Bradex®** sizes.

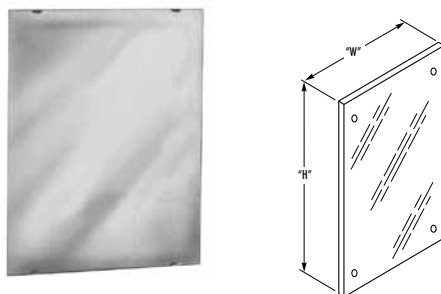**OPTIONAL FEATURES**

FEATURES	ADD SUFFIX
$\frac{1}{4}$ " Tempered glass mirror	- 2
Laminated glass mirror	- 3
300 Series stainless steel polished to a No. 8 architectural-grade finish in lieu of glass	- 4
400 Series bright annealed stainless steel in lieu of glass	- 5
Plexiglass mirror	- 6

**Note:** Tempered, laminated, plexiglass and stainless steel provide extra security from broken glass but may differ in color and reflectivity from standard mirrors.

## FREQUENCY FRAMELESS MIRRORS

Add style to your rest room with frameless Frequency mirrors without compromising durability. The contemporary “wave” design enhances rest room aesthetics, while the triple silver plated float glass is guaranteed against silver spoilage for 15 years. Raise eyebrows with frameless Frequency mirrors today!

### MODEL 747W

Mirror of first quality 1/4" float glass, triple silver plated with electro-copper-plated layer and thermosetting infrared cured paint backing. Meets Commercial Item Description A-A-3002 against silver spoilage and guaranteed for 15 years. Edges ground and polished smooth.

### MODELS

WIDTH (INCHES)	HEIGHT (INCHES)	GLASS OPTION	DESIGN OPTION	STANDARD MODEL NUMBER
30"	36"	0	B	747W-030360B
30"	36"	0	H	747W-030360H
30"	36"	0	L	747W-030360L
60"	36"	0	B	747W-060360B
60"	36"	0	H	747W-060360H
60"	36"	0	L	747W-060360L
90"	36"	0	H	747W-090360H
90"	36"	0	L	747W-090360L

#### Glass Option Codes:


0 = 1/4" plate glass mirror with polished edges

#### Design Option Codes:


B = Bead blasted wave

H = High (left side)


L = Low (left side)

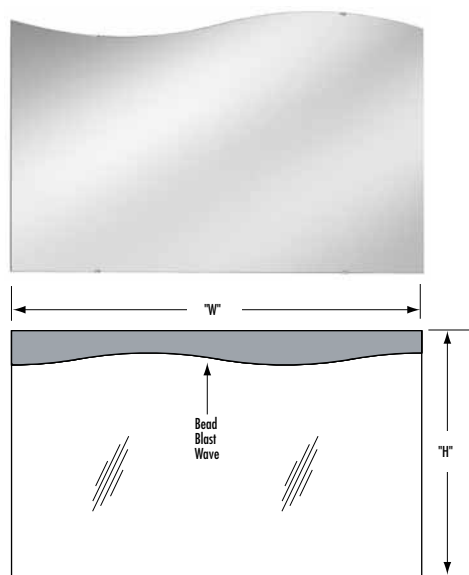


747W-060360B




747W-030360L



747W-030360H

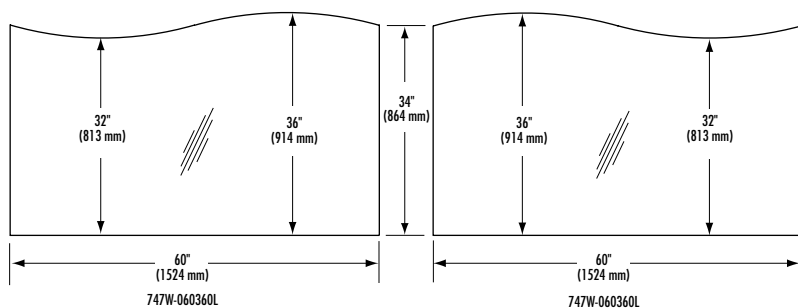

747W-060360L

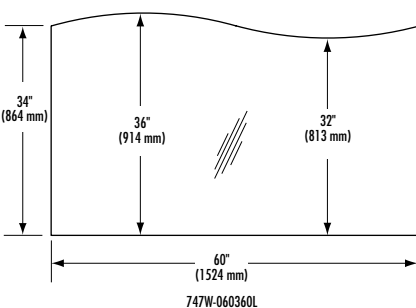

747W-060360H

## UNBREAKABLE STAINLESS STEEL MIRROR

### MODEL 748


Unframed mirror of stainless steel polished to No. 8 architectural bright finish. Mirror has 1/4" return to conceal 1/4" tempered Masonite backing. Fastens with tamper-resistant screws

Standard or barrier-free applications.


### MODEL 7481

In bright annealed stainless steel.

Standard or barrier-free applications.

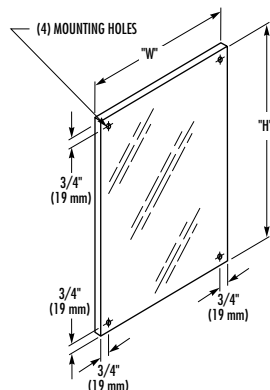

## STAINLESS STEEL SHELVES

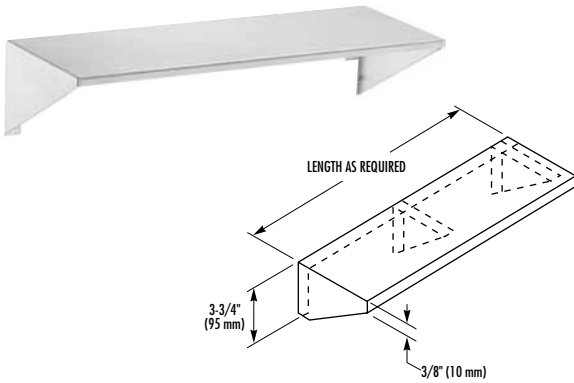


Surface-mounted shelves fabricated of stainless steel with exposed surfaces in architectural satin finish.

**MODEL 755** 5" Width

**MODEL 756** 6" Width

**MODEL 758** 8" Width

-24 24" Length **Bradex®**

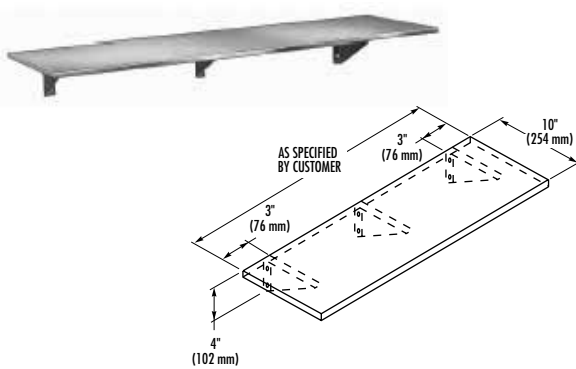

Surface-mounted shelves fabricated of stainless steel with exposed surfaces in architectural satin finish.

**MODEL 7510** 10" Width


**MODEL 7512** 12" Width

## CHROME-PLATED ZINC SHELF

### MODEL 790

Surface-mounted, fold-down utility shelf. Fabricated of heavy-duty, chrome-plated zinc die cast with textured shelf area. Rear hinged shelf folds down for use. Holds up to 150 lbs. Automatically returns to vertical position.

Unit measures 5" W x 14 7/8" D.

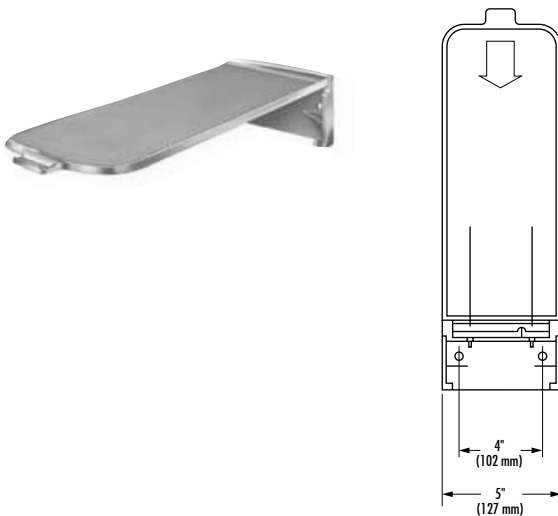


All Bradley Grab Bars are designed for safety and security of the physically disabled. The safety clearance feature is highly recommended by Barrier-Free design experts and required under most codes.

**Optional Features are listed on page 49. See technical data catalog for Bradex® sizes.**

## ANCHORING DEVICES

Building construction will govern the type of anchorage required.

**Note:** All mounting kits must be specified as optional extras. Order one kit for each flange. See technical data catalog for details.



**Standard Safety Clearance meets ADA requirements.**

Bradley will design and manufacture modified bars to satisfy unique installation applications. Contact your local Bradley representative for additional information.

## FEATURES

- Heavy-duty, 18-gauge stainless steel tubing
- Meets or exceeds the requirements of ANSI Standard A117.1, the ADA and ABA Accessibility Guidelines for Buildings and Facilities (ADAAG) and the Uniform Federal Accessibility Standard (UFAS)
- Attractive satin finish, safety grip finish or polished safety grip finish available
- Easy to install with optional anchoring devices

## HOW TO SPECIFY GRAB BARS


1. Select Series Number (812, 817, 832, etc.)

HEAVY-DUTY SERIES			
Mounting	1½" diameter	1¼" diameter	1" diameter
Concealed	812	832	852
Exposed	817	837	857

2. Select Finish Option (standard, safety grip, etc.)


FEATURE	ADD SUFFIX
Standard	0
Safety Grip Finish	2
Bright Polished Finish	4
Bright Polished Finish with Safety Grip	7

3. Select Grab Bar Configuration (001, 002, 005, etc.)

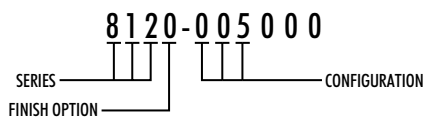

4. Select Dimensions Required

- If no modifications are required to the dimensions, an example of the Part No. is:

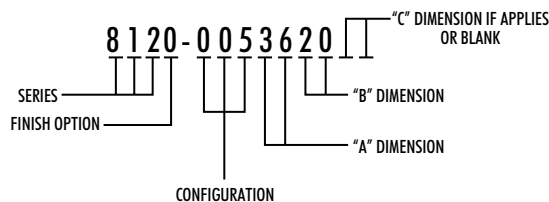


- Always list dimensions in alphabetical order (i.e., 36" x 20")

**Note:** If modifications are required to the dimensions other than A, B, or C, or if fractions are needed, contact Bradley for a submittal and special number. Unless otherwise stated, stand-off will be on long section of bar. All dimensions shown in diagrams are from wall to centerline of mounting flange or centerline of grab bar. Standard clearance is 1½."

## HOW TO MEASURE A GRAB BAR


All Grab Bar Configurations are specified using centerline to centerline dimensions.

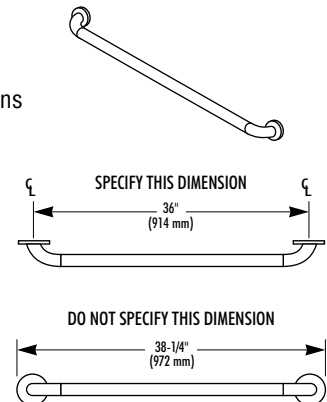


If wall dimensions are given:

- To obtain length of side bars, take clearance (1½") plus ½ of diameter of Grab Bar Series plus an additional 2" and subtract from side wall dimension
- To obtain back bar dimension, take clearance (1½") plus ½ of diameter of Grab Bar Series and subtract twice from back wall dimension


**Example:** 812 Series. If wall dimensions are 30" x 58" x 30," bar dimensions would be 25¼" x 53½" x 25¼."

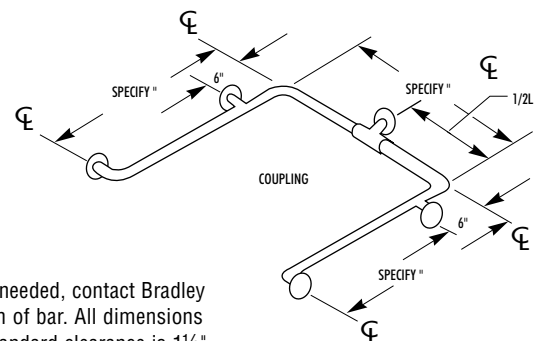

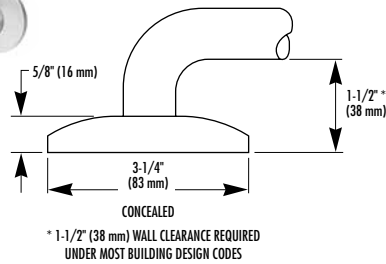**812 SERIES**


Grab bar of 1½" O.D., 18-gauge stainless steel, seamless construction with exposed surfaces in architectural satin finish. Mounting flanges concealed by snap-on escutcheons. Antimicrobial option is available for select sizes.

- 2 Safety-Grip Finish
- 4 High-Polish Finish
- 7 Safety Grip with Polished Finish on Ends

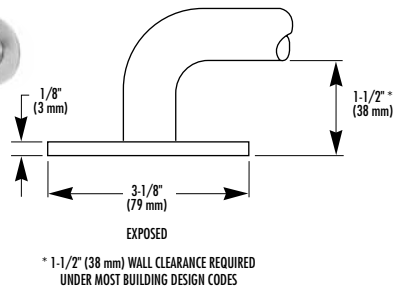**817 SERIES**


Grab bar of 1½" O.D., 18-gauge stainless steel, seamless construction with exposed surfaces in architectural satin finish. Exposed mounting flanges.

- 2 Safety-Grip Finish
- 4 High-Polish Finish
- 7 Safety Grip with Polished Finish on Ends

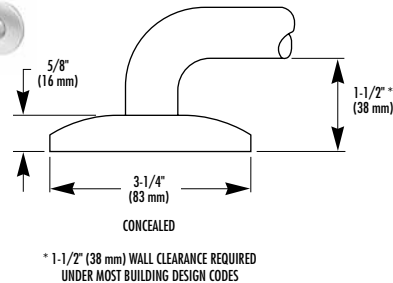**832 SERIES**


Grab bar of 1¼" O.D., 18-gauge stainless steel, seamless construction with exposed surfaces in architectural satin finish. Mounting flanges concealed by snap-on escutcheons.

- 2 Safety-Grip Finish **Bradex®**
- 4 High-Polish Finish
- 7 Safety Grip with Polished Finish on Ends

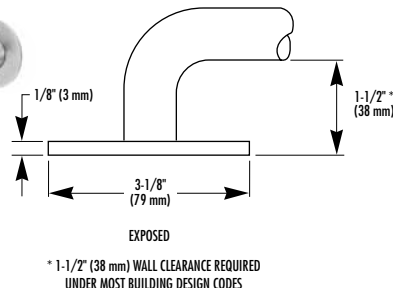**837 SERIES**

Grab bar of 1¼" O.D., 18-gauge stainless steel, seamless construction with exposed surfaces in architectural satin finish. Exposed mounting flanges.

- 2 Safety-Grip Finish
- 4 High-Polish Finish
- 7 Safety Grip with Polished Finish on Ends

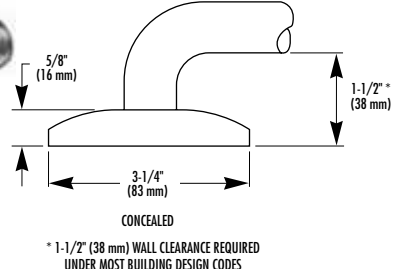**852 SERIES Bradex®**

Grab bar of 1" O.D., 18-gauge stainless steel, seamless construction with exposed surfaces in architectural satin finish. Concealed mounting flanges.

- 2 Safety-Grip Finish
- 4 High-Polish Finish
- 7 Safety Grip with Polished Finish on Ends




## TYPICAL WATER CLOSET APPLICATIONS

### 001


Specify length desired.  
See 048 and 049 for  
45° mounting.  
001 over 54"  
requires a center  
support and  
becomes 002.



When installed as specified,  
unit meets "Barrier-Free" requirements.




### 002

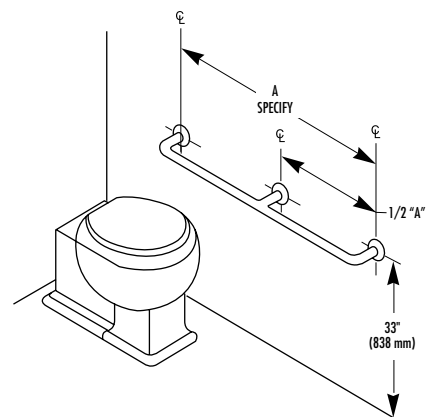


### 003

Standard lengths 48",  
52" or 54". Only one  
end return. Special  
size "A" dimensions,  
center post will only  
be added to models  
greater than 24."

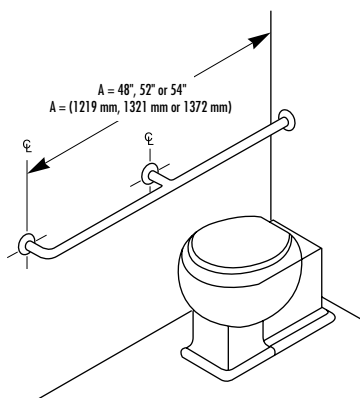


### 004

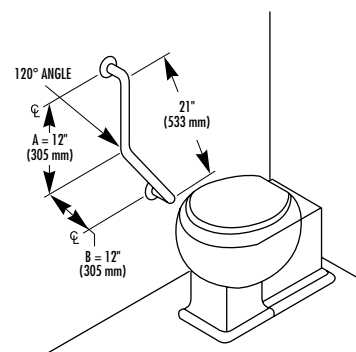


### 005

"A" dimension  
will always have  
stand off.

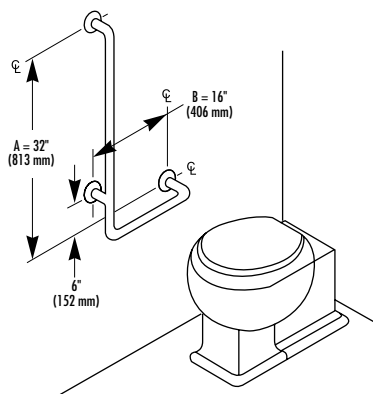


### 006

Opposite 005.  
"A" dimension  
will always have  
stand off.

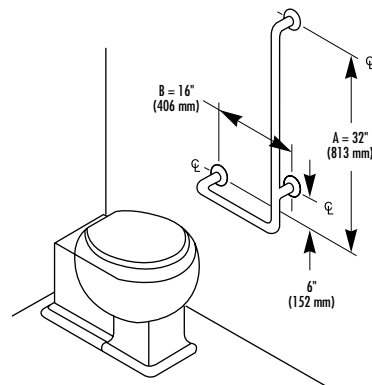


### 010

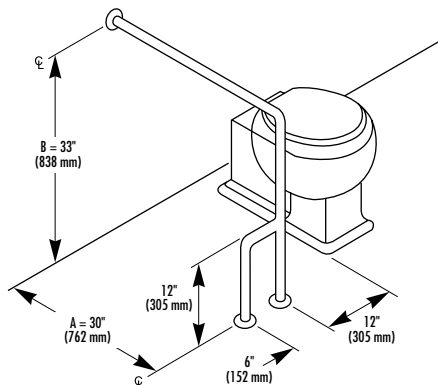

### 011


Opposite 010.

**Note:**  
When grab  
bar dimensions  
are modified,  
a support will  
be added to  
all sections  
longer than 54."

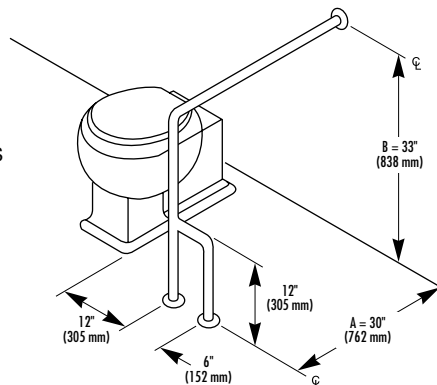


**012**

Confirm clearance between fixture or plumbing and grab bar in individual applications.

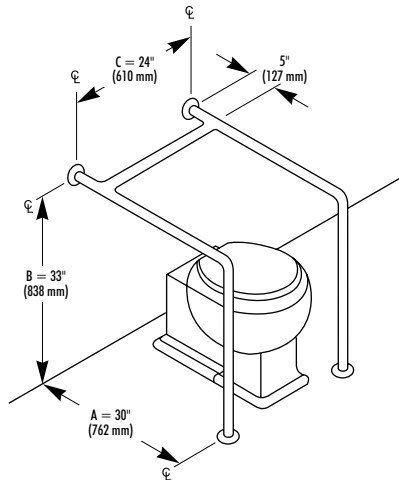**039**


✚ Bar slides to accommodate various size water closets.

Flat bar –  
2" wide x  
1/8" thick.  
11 ga. bolts  
to toilet.

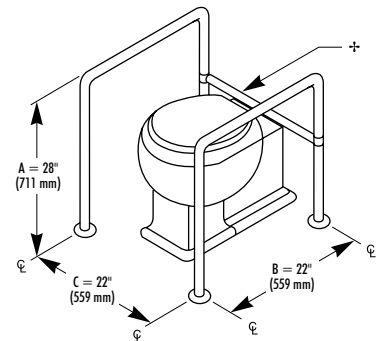**039-1**

✚ Bar adjustable for right or left hand mounting.



Flat bar –  
2" wide x  
1/8" thick.  
11 ga. bolts  
to toilet.

**048**



(shown)

**049**


Opposite hand.

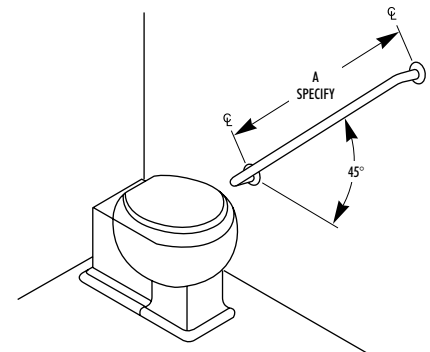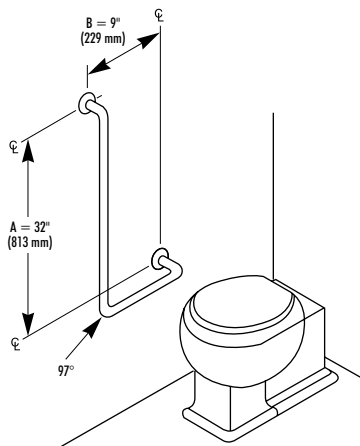**040****041**

Opposite 040.

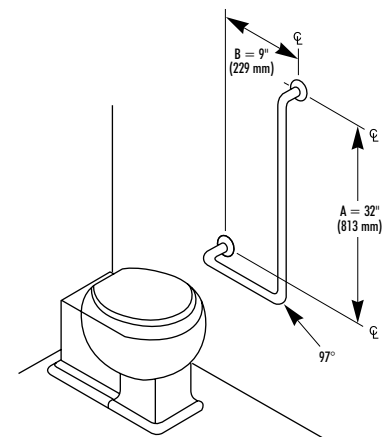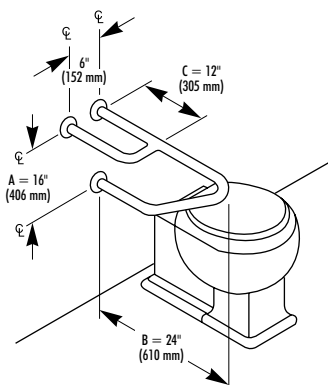**115****116**

Opposite 115.

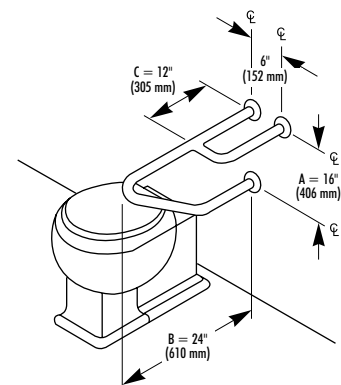


## TYPICAL WATER CLOSET APPLICATIONS

### 054


30" x 33"

**Note:** 1" not available for this application.

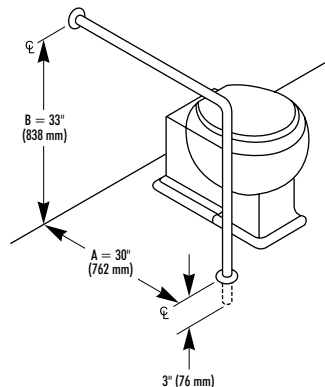


### 117

Confirm clearance between fixture or plumbing and grab bar in individual applications.

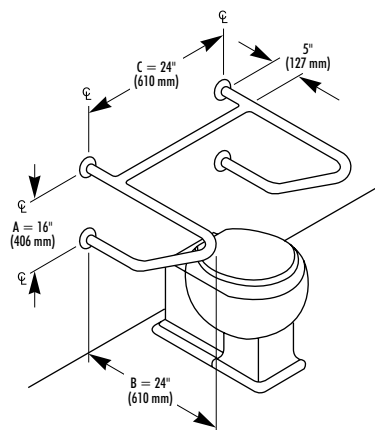

### 118


Confirm clearance between fixture or plumbing and grab bar in individual applications.

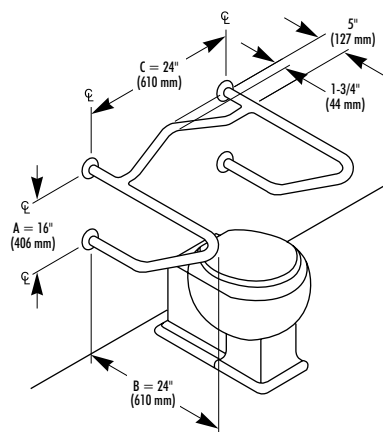

### 119


(Shown)

Confirm clearance between fixture or plumbing and grab bar in individual applications.

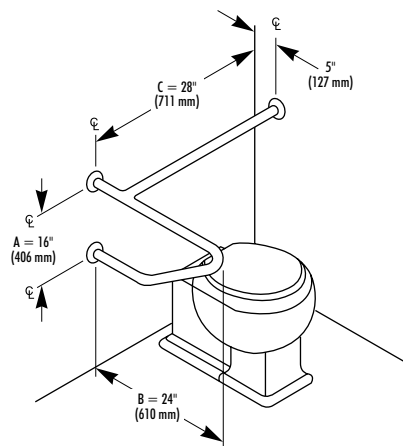

### 120


Opposite 119.

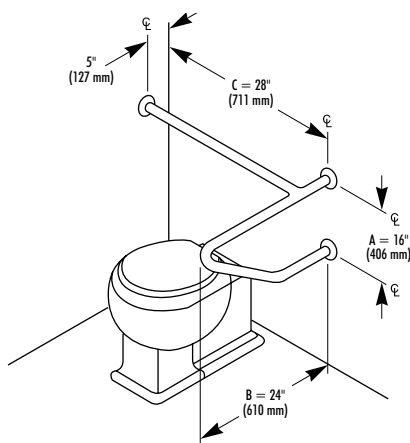


### 059

For special sizes, specify 059 modified 00" x 00."


B side will have stand off.

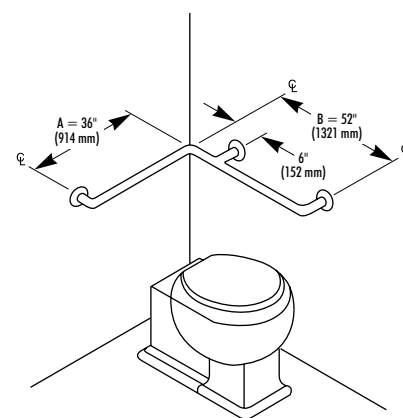

### 055

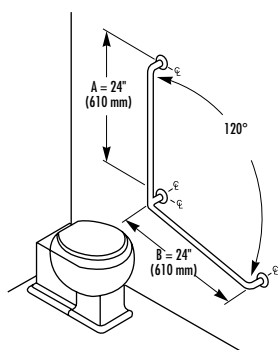


### 057






## TYPICAL SHOWER APPLICATIONS

007

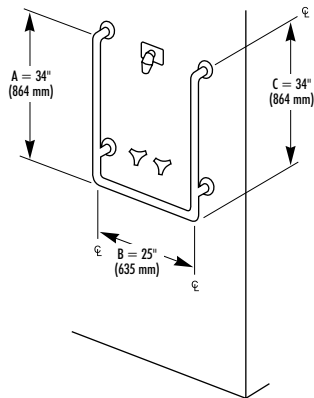


032

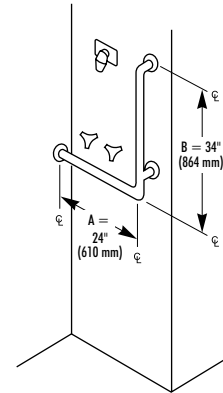


033

Opposite 032.

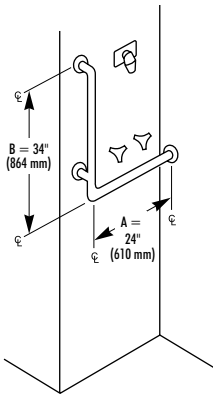


034

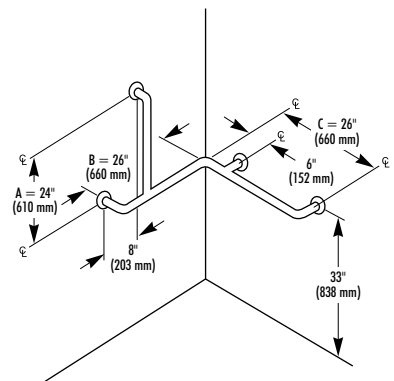


035

Opposite 034.

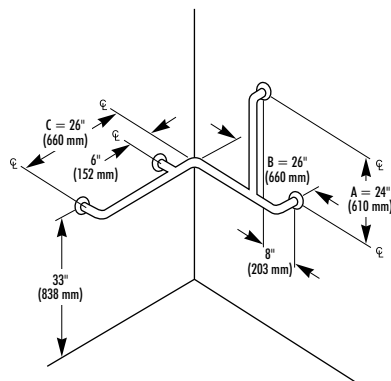


036

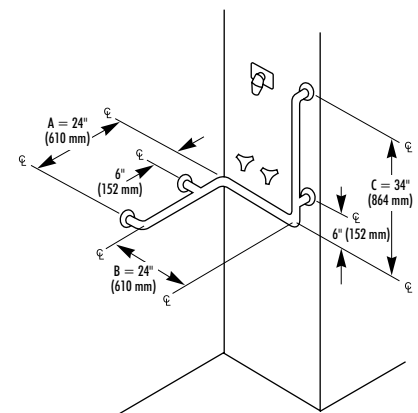

037

Opposite 036.

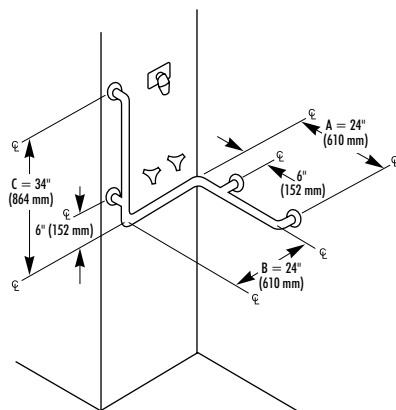


060

Specify  
00" x 00" x 00".


**Note:** Standard  
dimensions are  
36" x 60" x 36".

This configuration  
ships in two pieces  
which are joined  
at the coupling.  
This configuration  
is UPS shippable.

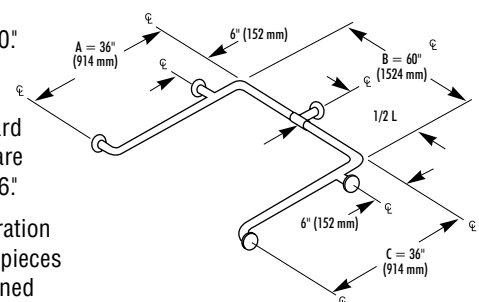


## TYPICAL TUB APPLICATIONS

**021**

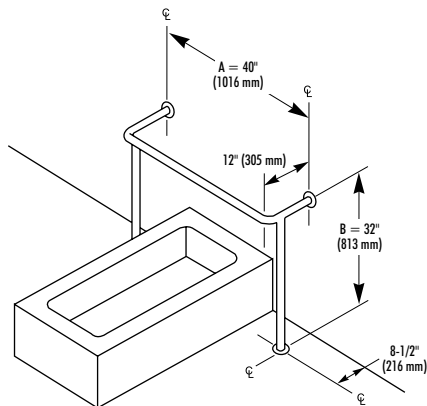


**022**


Opposite 023.

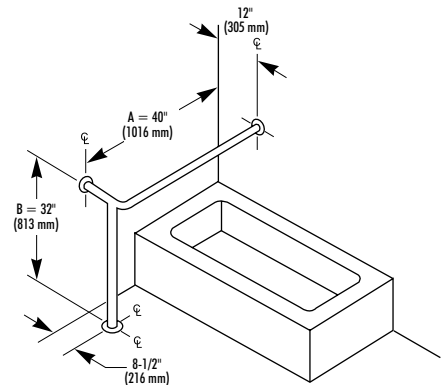

**023**

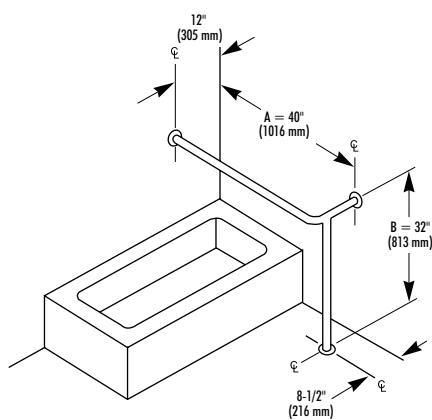


**024**

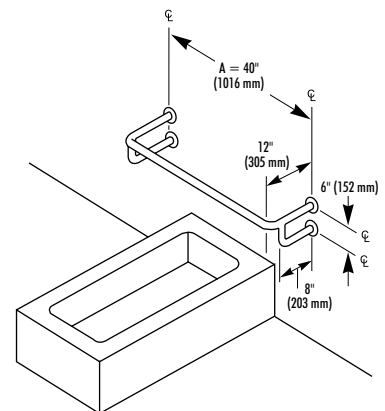


**026**

Opposite 027.

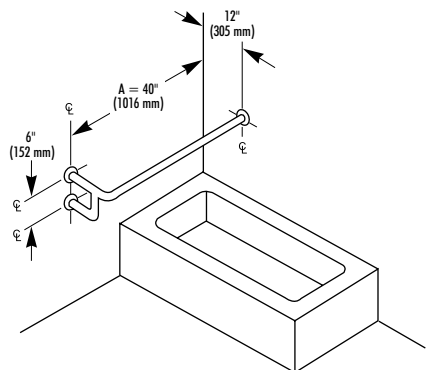


**027**

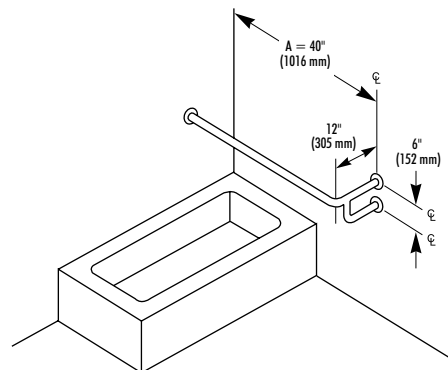



**030**

Opposite 031.

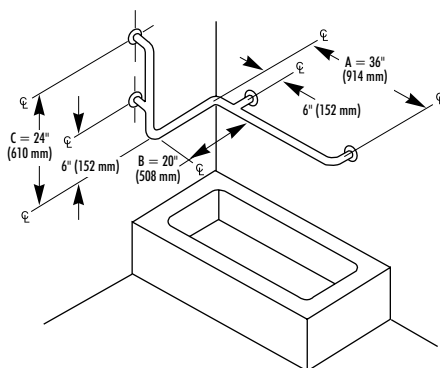

**031**

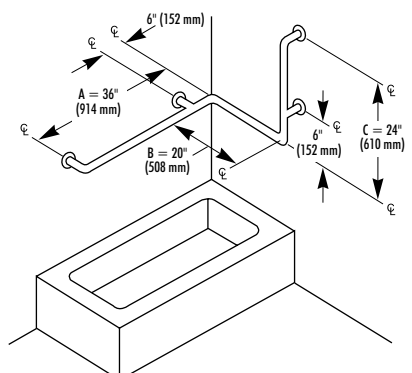

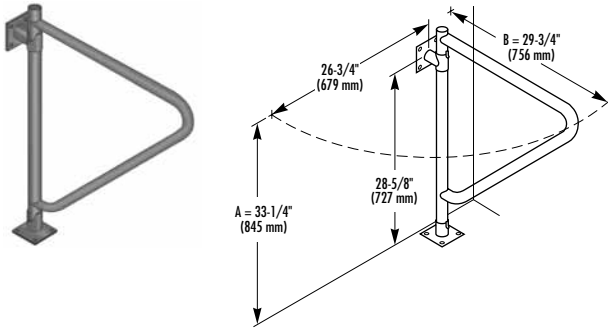


## MODEL 8170-158

### MODEL 8170-1581 with Integral Tissue Dispenser

Swing-away grab bar can be rotated to a support or departure position. Locks into support position. 1½" O.D., 18-gauge stainless steel with exposed surfaces in architectural satin finish. Wall and floor flanges of ⅜" thick stainless steel plate.

-2 Safety-Grip Finish

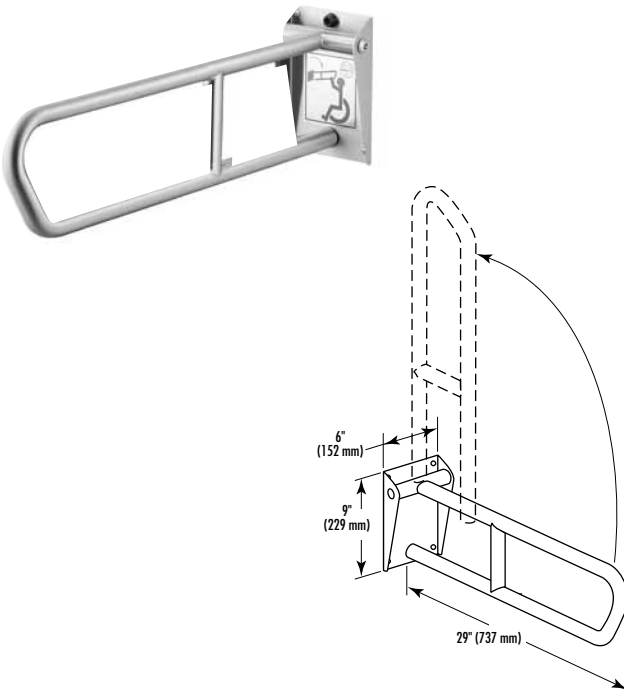


## MODEL 8370-101 Bradex®

Swing-up grab bar swings up when not in use. Designed to prevent it from accidentally falling into position. Operates with less than 5 pounds of force. 1¼" O.D., 18-gauge stainless steel with exposed surfaces in architectural satin finish. Bar projects 29" from wall when in horizontal position.

-2 Safety-Grip Finish

### MODEL 8370-102 Bradex®

Bar projects 34" from wall in horizontal position.

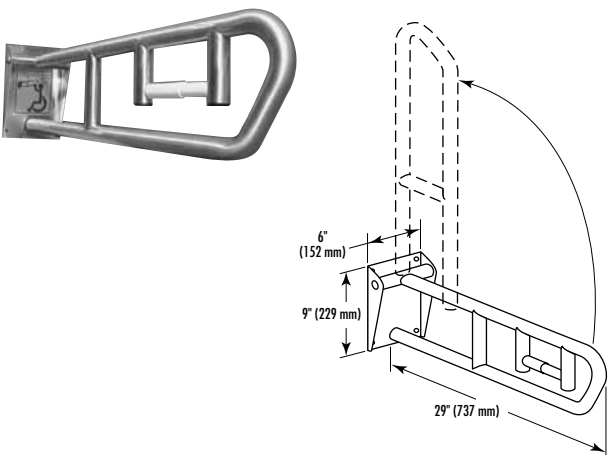

## MODEL 8370-103 Bradex®

Swing-up grab bar with integral tissue dispenser. Swings up when not in use. Operates with less than 5 pounds of force. 1¼" O.D., 18-gauge stainless steel with exposed surfaces in architectural satin finish. Tissue dispenser spindle of ABS plastic with concealed spring. Bar projects 29" from wall in horizontal position.


-2 Safety-Grip Finish



## OPTIONAL FEATURES

FEATURES	MODELS	ADD SUFFIX
Safety-grip finish	All models	- 2
High-polish finish	All models except 8170-158, 8170-158-1, 8370-101 and 8370-103	- 4
Safety grip with polished finish	All models except 8170-158, 8170-158-1, 8370-101 and 8370-103	- 7

Introducing Bradley's new Boutique Accessory Series – a unique, complete product line of washroom accessories with an upscale residential look for commercial applications. Accessorize your next cruise ship, office complex, stadium suite or restaurant perfectly with a design that complements any styling.

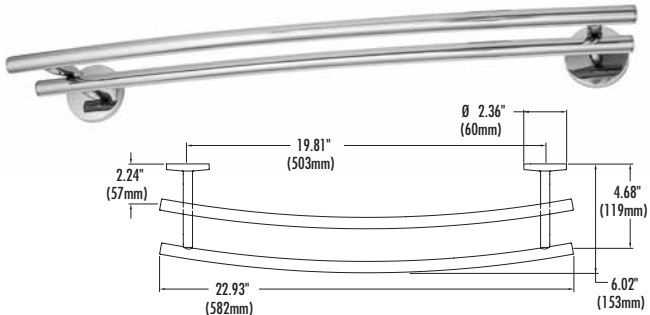

## MODEL 9180 *Bradex*® **NEW!**

Chrome plated double towel bar. Upscale hospitality double towel bar. Surface-mounted, contemporary design. Polished Chrome finish.


Unit measures 24" Length



## MODEL 9181 *Bradex*® **NEW!**


Dual sided swivel vanity mirror - 3:1 magnification. Surface-mounted, contemporary design. Polished Chrome finish.


8" Diameter

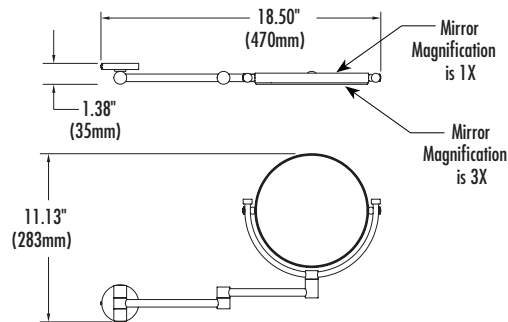

## MODEL 9182 *Bradex*® **NEW!**


Chrome plated toilet brush and holder. Upscale, contemporary design. Free standing.

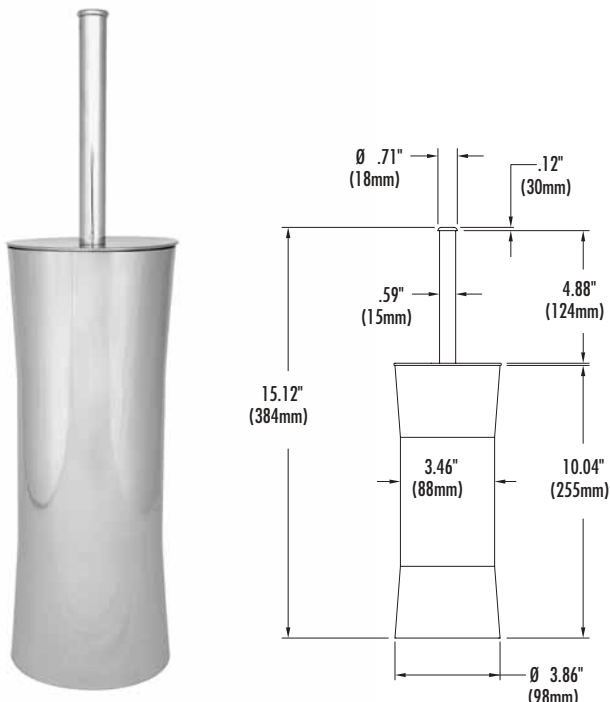

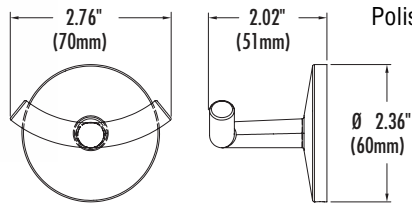
**MODEL 9183 Bradex® NEW!**

Chrome plated robe hook. Upscale, contemporary design.

Polished Chrome finish.


**MODEL 9184 Bradex® NEW!**

Chrome plated toilet paper holder. Single roll design with non-controlled delivery. Polished Chrome finish.

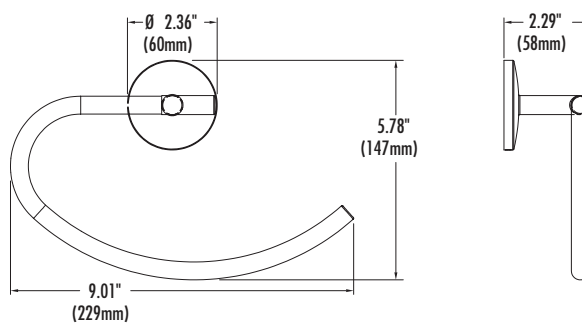**MODEL 9185 Bradex® NEW!**

Chrome plated towel ring. Surface-mounted, contemporary design.

Polished Chrome finish.

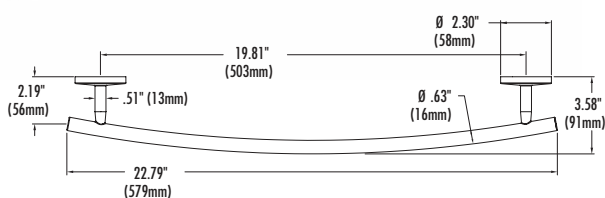
**MODEL 9186 Bradex® NEW!**

Chrome plated single towel bar. Surface-mounted, contemporary design. Polished Chrome finish.

Unit measures 24" Length

Bradley offers quality crafted accessories for hotel washrooms and showers. Sturdy, stainless steel construction provides years of dependable service. Attractive, streamlined design works well with contemporary or traditional styling. Available in a variety of finishes to complement any hotel decor.

## STAINLESS STEEL

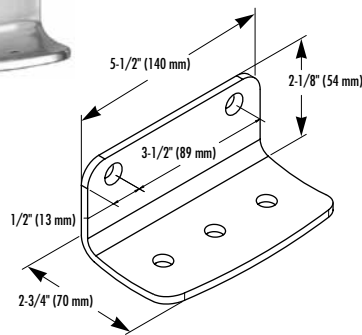


### MODEL 900 *Bradex*®

Surface-mounted, extra heavy-duty, 7-gauge soap dish with drain holes. Satin finish.

Unit measures 5½" W x 2⅛" H x 2¾" D.

### MODEL 9001 18-Gauge Soap Dish

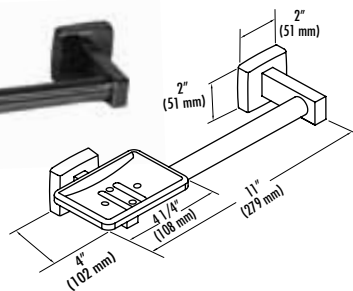


### MODEL 9034 Satin Finish

### MODEL 9035 Bright Polish Finish

Surface-mounted towel bar with soap dish. Concealed mounting plate with set screw.

Unit measures 11" W x 4" D.

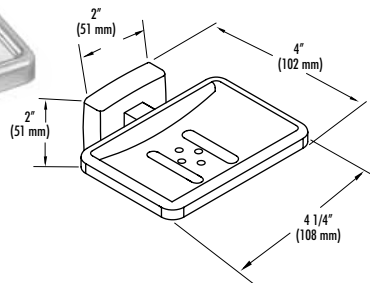



### MODEL 9014 Satin Finish *Bradex*®

### MODEL 9015 Bright Polish Finish *Bradex*®

Surface-mounted soap dish with drain holes. Concealed mounting plate with set screw.

Unit measures 4¼" W x 4" D.

-63 Without Drain Holes

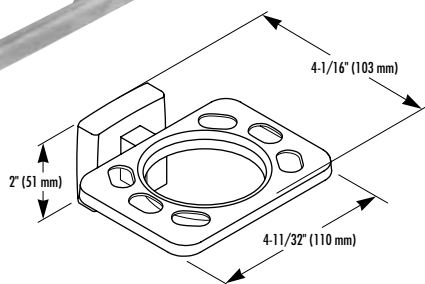


### MODEL 9044 Satin Finish *Bradex*®

### MODEL 9045 Bright Polish Finish

Surface-mounted tumbler and toothbrush holder. Concealed mounting plate with set screw.

Unit measures 4⅞" W x 4⅛" D.

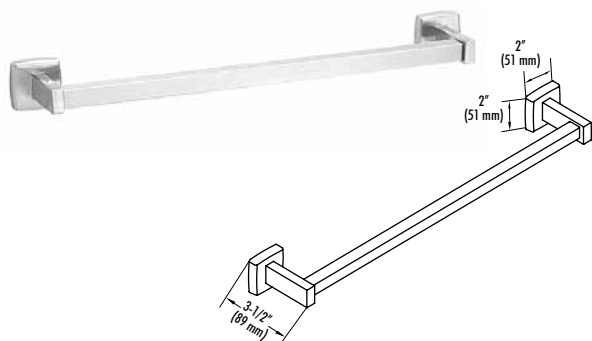
**STAINLESS STEEL****MODEL 9054** Satin Finish **Bradex®****MODEL 9055** Bright Polish Finish **Bradex®**

Surface-mounted,  $\frac{3}{4}$ " square towel bar. Concealed mounting plate with set screw.

Units available in 18", 24" and 30"\* widths.

Projects 3" from wall.

\* Not available for **Bradex®** shipment.

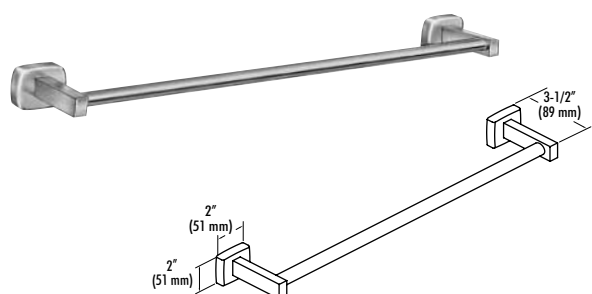
**MODEL 9065** Satin Finish **Bradex®****MODEL 9066** Bright Polish Finish **Bradex®**

Surface-mounted,  $\frac{3}{4}$ " round towel bar. Concealed mounting plate with set screw.

Units available in 18", 24" and 30"\* widths.

Projects 3" from wall.


\* Not available for **Bradex®** shipment.

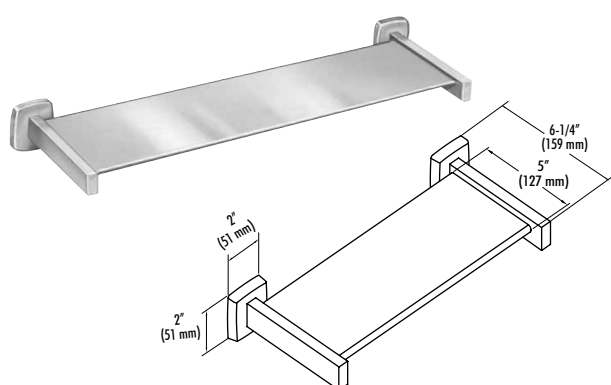**MODEL 9094** Satin Finish**MODEL 9095** Bright Polish Finish (shelf is satin finish)

Surface-mounted, 5" D shelf. Concealed mounting plate with set screw.


Units available in 18" or 24" widths.

Projects 6 1/4" from wall.

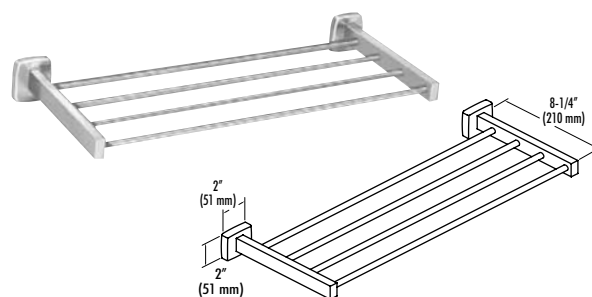**MODEL 9104** Satin Finish**MODEL 9105** Bright Polish Finish


Surface-mounted, 8" D towel shelf. Concealed mounting plate with set screw.

Units available in 18" or 24" widths.

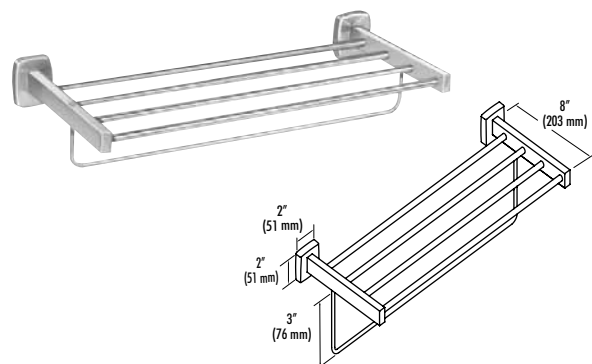**MODEL 9104-90** Satin Finish**MODEL 9105-90** Bright Polish Finish


Surface-mounted, 8" D towel shelf with towel bar. Concealed mounting plate with set screw.

Units available in 18" or 24" widths.

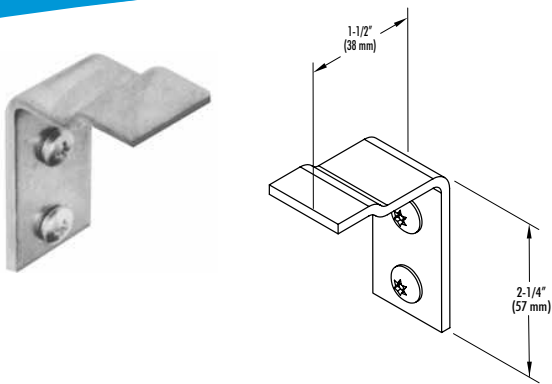

## MODEL 9111 Satin Finish

Surface-mounted clothes hook. Exposed mounting.  
Projects 1½" from wall.

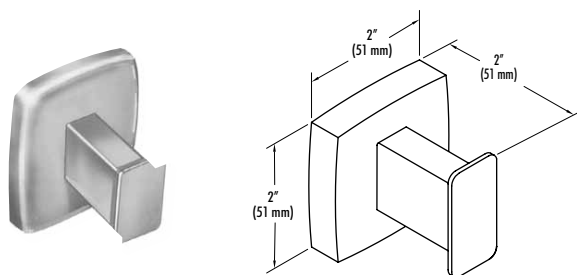


## MODEL 9114 Satin Finish **Bradex**

## MODEL 9115 Bright Polish Finish **Bradex**


Surface-mounted, single robe hook. Concealed mounting plate with set screw.

Units measure 2" W x 2" H. Projects 2" from wall.

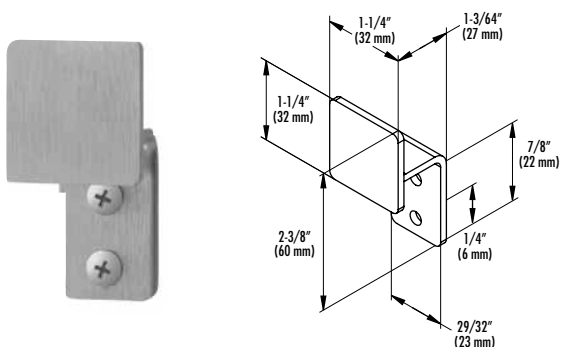

## MODEL 917 Satin Finish **Bradex**

Surface-mounted, single robe hook. Exposed mounting.  
Projects 1½" from wall.

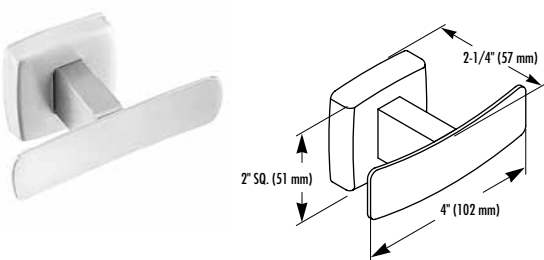


## MODEL 9124 Satin Finish **Bradex**

## MODEL 9125 Bright Polish Finish **Bradex**

Surface-mounted, double robe hook. Concealed mounting plate with set screw.

Projects 2¼" from wall.

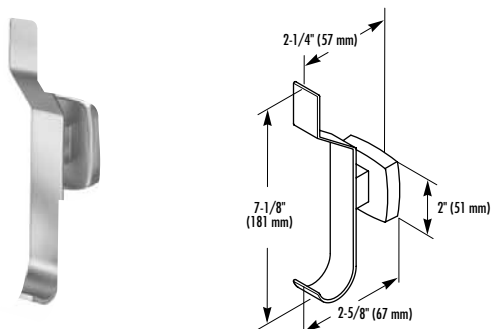

## MODEL 9134 Satin Finish **Bradex**


## MODEL 9135 Bright Polish Finish **Bradex**

Surface-mounted, combination hat and coat hook. Concealed mounting plate with set screw.

Projects 2½" from wall.






**STAINLESS STEEL****MODEL 9144 Satin Finish**

Surface-mounted, door stop of high-impact plastic with rubber end cushion. Concealed mounting plate with set screw.


Projects 2 1/8" from wall.

**MODEL 9314 Satin Finish *Bradex*****MODEL 9315 Bright Polish Finish**

Surface-mounted towel hook. Concealed mounting plate with set screw.


**MODEL 9314** Projects 4 7/8" from wall.

**MODEL 9315** Projects 4 1/8" from wall.

**MODEL 9334 Satin Finish****MODEL 9335 Bright Polish Finish *Bradex***

Surface-mounted towel ring. Concealed mounting plate with set screw.


Projects 2 3/8" from wall.

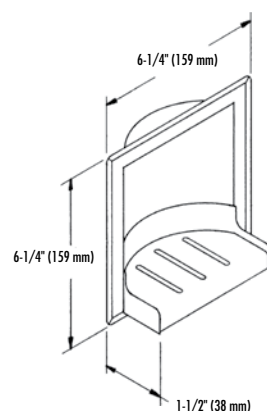**MODEL 9353 Satin Finish****MODEL 9352 Bright Polish Finish**

Recess-mounted soap dish. Plastic soap tray.

Rough wall opening 5 1/4" W x 5 1/4" H x 2" D.



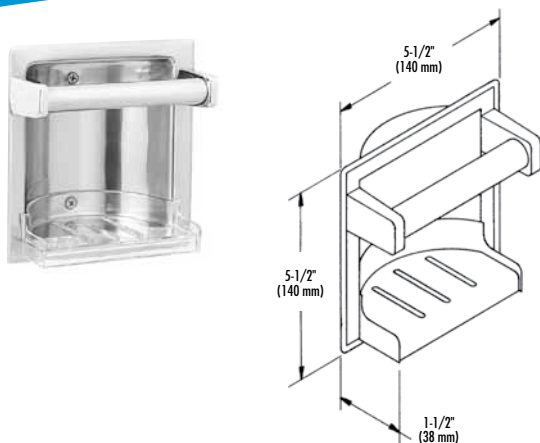

**MODEL 9362** Bright Polish Finish Stainless Steel


**MODEL 9363** Satin Stainless Steel

Recess-mounted soap dish. Heavy, clear-plastic soap tray.

**MODEL 9362 & 9363**

Rough wall opening 5 1/4" W x 5 1/4" H x 2" D.

-55 Back Clamp for Drywall Mounting

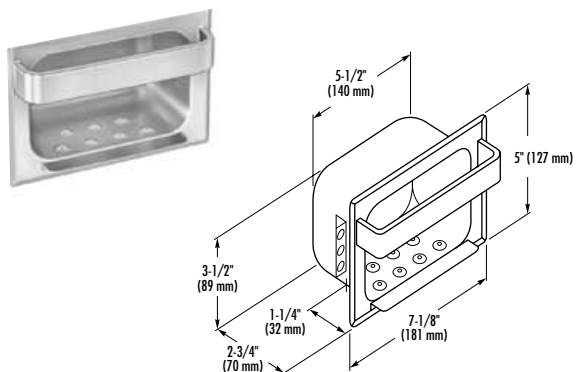


**MODEL 940**

Recess-mounted soap dish. Unit anchors in masonry walls with mortar lugs.

Rough wall opening 6 1/4" W x 4 1/4" H x 2 3/4" D.

**MODEL 9402**

Unit with back clamp for drywall mounting.

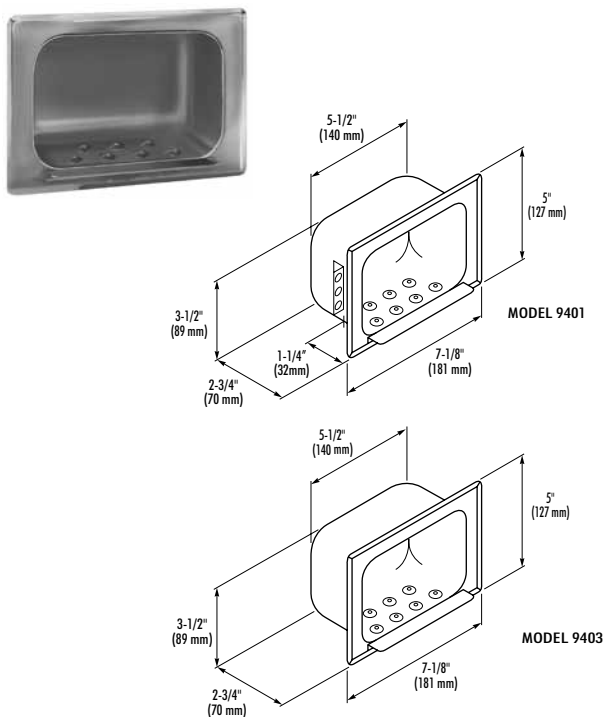

**MODEL 9401** with Mortar Lugs

**MODEL 9403** with Wall Clamp **Bradex**®

Recess-mounted soap dish.

Rough wall opening 6 1/4" W x 4 1/4" H x 2 3/4" D.


**MODEL 9403-96**

Unit without drip lip.

**STAINLESS STEEL****MODEL 9495**



Surface-mounted cup dispenser. Fabricated of 22-gauge stainless steel with exposed surfaces in architectural satin finish. Cabinet hinged at bottom and secured with tumbler lock on top. Holds 150 3-oz. cups. Also accommodates 7-oz. cups.

Unit measures 3¼" W x 14½" H x 3¼" D.

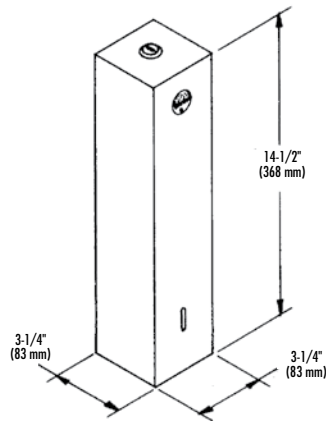**CHROME-PLATED ZAMAC****MODEL 921 Bradex®****MODEL 921-60 with Drain Holes**


Surface-mounted soap dish. Concealed mounting plate with set screw.

Unit measures 3<sup>15</sup>/<sub>16</sub>" W x 2<sup>7</sup>/<sub>8</sub>" D.

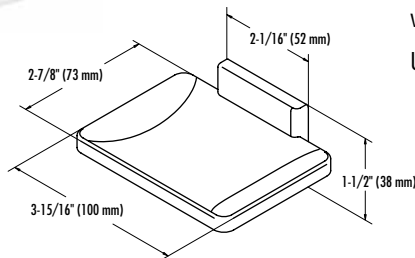**MODEL 924**

Surface-mounted tumbler and toothbrush holder. Concealed mounting plate with set screw.

Unit measures 4½" W x 3½" D.

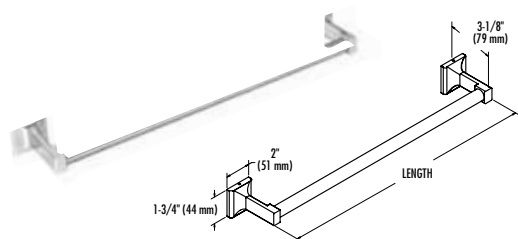

## MODEL 926

Surface-mounted,  $\frac{3}{4}$ " round towel bar. Concealed mounting plate with set screw.

Unit available in 18", 24", and 30" widths. Projects  $3\frac{1}{8}$ " from wall.





## MODEL 927 *Bradex*®

Surface-mounted,  $\frac{3}{4}$ " square towel bar. Concealed mounting plate with set screw.

Unit available in 18", 24", and 30"\* widths. Projects  $3\frac{1}{8}$ " from wall.


\*Not available for *Bradex*® shipping.

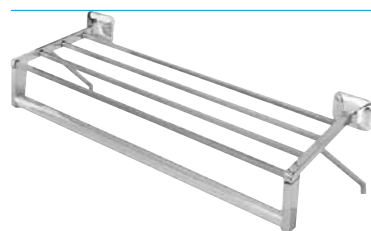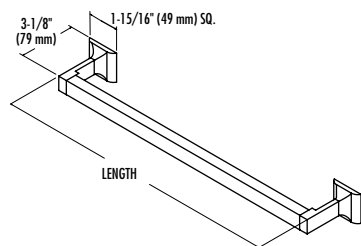

## MODEL 9301

Surface-mounted,  $8\frac{1}{2}$ " deep towel shelf with towel bar and support braces. Concealed mounting plate with set screw.


Unit available in 18" or 24" widths.

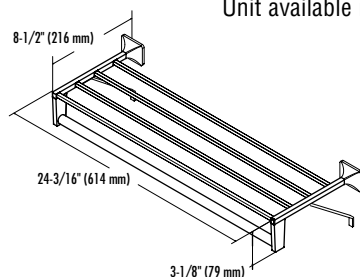


## MODEL 931

Surface-mounted, single robe hook. Concealed mounting plate with set screw.


Projects  $2\frac{1}{8}$ " from wall.



**MODEL 9311**


Surface-mounted towel hook. Concealed mounting plate with set screw.

Projects 5 1/8" from wall.

**MODEL 932 Bradex®**

Surface-mounted, double robe hook. Concealed mounting plate with set screw.

Projects 1 1/2" from wall.


**MODEL 934**

Surface-mounted towel ring. Concealed mounting plate with set screw.

Projects 1 3/4" from wall.

**MODEL 947**

Surface-mounted retractable clothesline. Constructed of heavy-gauge No. 8 bright polished stainless steel. Cord length is 6 feet.

**MODEL 908**

Heavy-duty, surface-mounted, round towel bar. Support posts are chrome-plated brass with satin finish. Bar is satin finish stainless steel, 1" O.D.

Unit available in 18", 24" and 30" widths.

Projects 3 1/4" from wall.

**-24 24" Length Bradex®**




## CHROME-PLATED BRASS

### MODEL 901

#### MODEL 901-60 with Drain Holes


Soap dish. Snaps over concealed mounting plate.

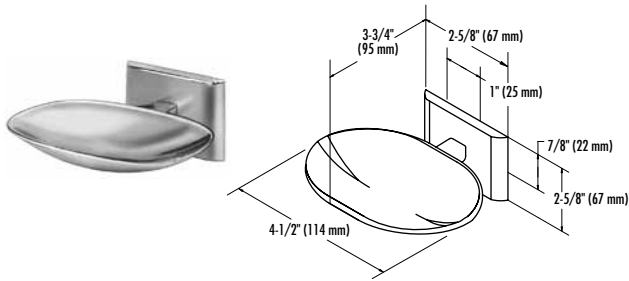

### MODEL 911

Single robe hook. Snaps over concealed mounting plate.

Projects 2" from wall.

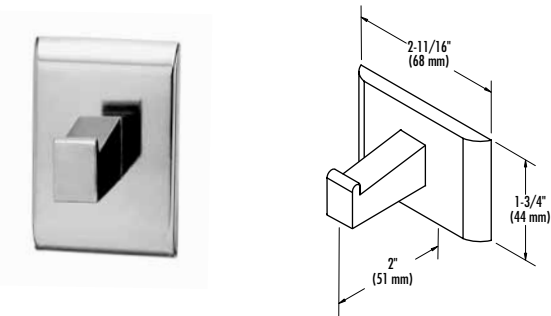


### MODEL 9118 Exposed Mounting **Bradex**

#### MODEL 9119 Concealed Mounting **Bradex**

Robe hook constructed of forged brass with bright chrome finish. Unit measures 3" in diameter.

Projects 3<sup>15</sup>/<sub>16</sub>" from wall.


-81 Chrome-Plated Brass

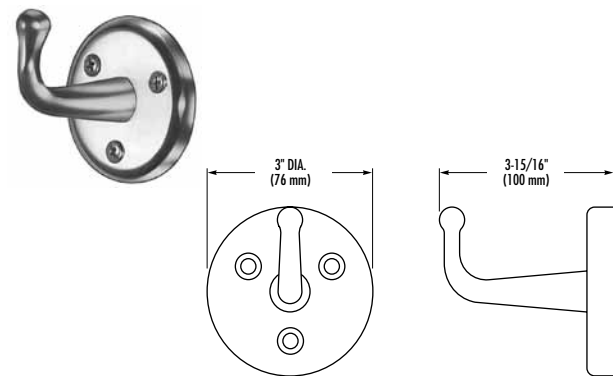

### MODEL 912 **Bradex**

Double robe hook. Snaps over concealed mounting plate.


Projects 1<sup>3</sup>/<sub>4</sub>" from wall.

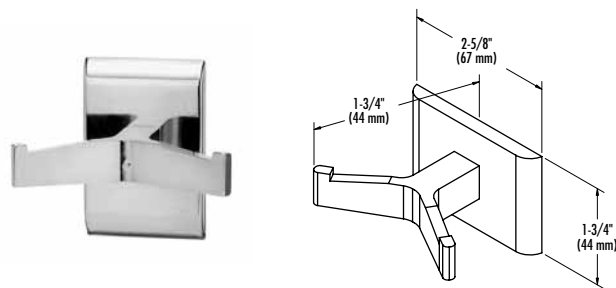


### MODEL 914

Double hook. Exposed fasteners. Unit measures 2<sup>3</sup>/<sub>4</sub>" in diameter.


Projects 1<sup>1</sup>/<sub>2</sub>" and 3<sup>1</sup>/<sub>2</sub>" from wall.

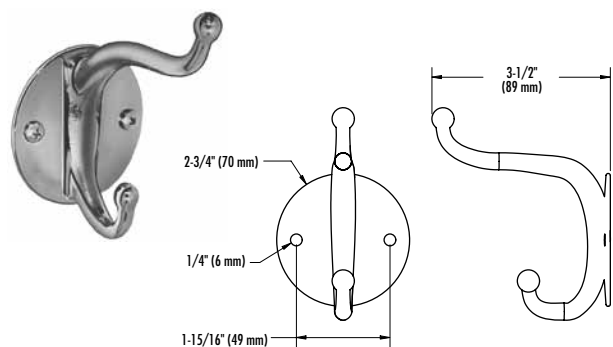

**MODEL 915 Bradex®**

Hook and bumper. Exposed fasteners.

Projects 3" from wall.

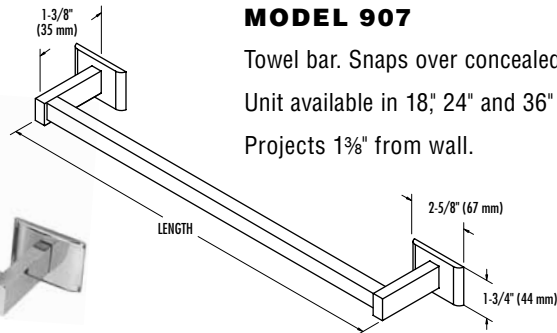**MODEL 907**

Towel bar. Snaps over concealed mounting plate.

Unit available in 18", 24" and 36" widths.

Projects 1 3/8" from wall.

**SHOWER CURTAINS****MODEL 9533 Bradex®**

Vinyl shower curtain. Fabricated of 6-gauge vinyl material. Hemmed edges and heat-sealed grommets on 6" centers. White is standard.

**MODEL 9534**

Duck shower curtain. Fabricated of 100% cotton duck material with hemmed top edges and chrome-plated nickel grommets on 6" centers. White only.

**MODEL 9535**

Antimicrobial shower curtain. Fabricated of 10-oz., nylon-reinforced, antimicrobial, 8-gauge vinyl material. Flame resistant and self deodorizing with rust-proof grommet on 6" centers. All sides hemmed. Green is standard.

**MODEL 9537 Bradex®**

Same as Model 9535 shower curtain in white.


**Bradex® SIZES**

36" x 72"


42" x 72"

48" x 72"

72" x 72"

**MODEL 9536 Bradex®**


Shower curtain hook. Fabricated of stainless steel spring.

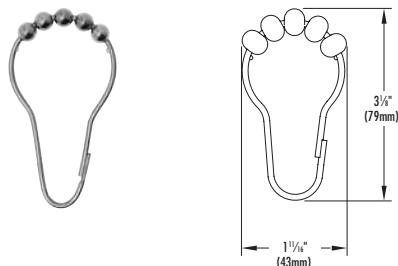

## MODEL 9540 Bradex®

Shower curtain hook with rollers. Fabricated of stainless steel wire with snap fastener.

*See technical data from website*


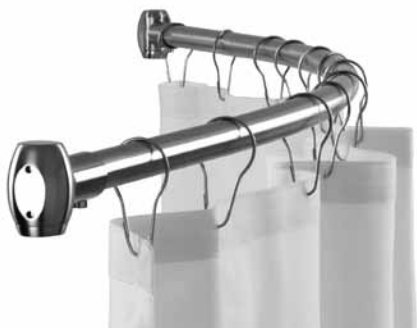


## MODEL 9530-60 Bradex®


### MODEL 9530-72

Shower curtain rod fabricated of stainless steel, seamless construction with exposed surfaces in architectural satin finish. Accommodates 60" shower stall increasing space in shower stall.

#### -78 Bright Polished Finish

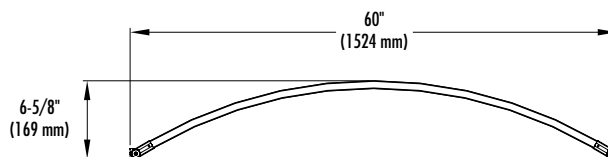

## SHOWER RODS - EXPOSED MOUNTING

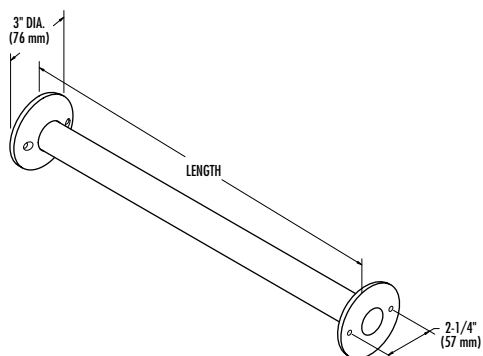

## MODEL 9531 Bradex®

Heavy-duty shower curtain rod with exposed mounting. Rod of 18-gauge, satin-finish stainless steel; 1 1/4" O.D. Flanges of 22-gauge, satin-finish stainless steel; 3" O.D. For lengths 72" and greater, model 9522 is required. Must specify distance from ceiling.

### MODEL 9531-4 Bright Finish

For lengths 72" and greater, model 9522 is required. Must specify distance from ceiling.

#### Bradex® SIZES

36", 42", 48" and 60"

## MODEL 953 Bradex®

Shower curtain rod of satin-finish stainless steel; 1" O.D. For rods over 72" and L shaped, specify model 9531 or 9539.

### MODEL 953-4 Bright Finish

#### Bradex® SIZES

36" and 60"



## SHOWER RODS - CONCEALED MOUNTING

### MODEL 9539 *Bradex*®

Heavy-duty shower curtain rod with concealed mounting. Fabricated of satin-finish stainless steel; 1¼" O.D. Flanges 3⅜" O.D. Escutcheons snap over flanges to provide concealed mounting. For lengths 72" and greater, model 9522 is required. Must specify distance from ceiling.

#### MODEL 9539-4 Bright Finish

For lengths 72" and greater, model 9522 is required. Must specify distance from ceiling.

#### *Bradex*® SIZES

36" and 60"



### MODEL 9538 *Bradex*®

Shower curtain rod of satin-finish stainless steel; 1" O.D. For rods over 72" and L shaped, specify model 9531 or 9539.

#### MODEL 9538-4 Bright Finish

#### *Bradex*® SIZES


36" and 60"

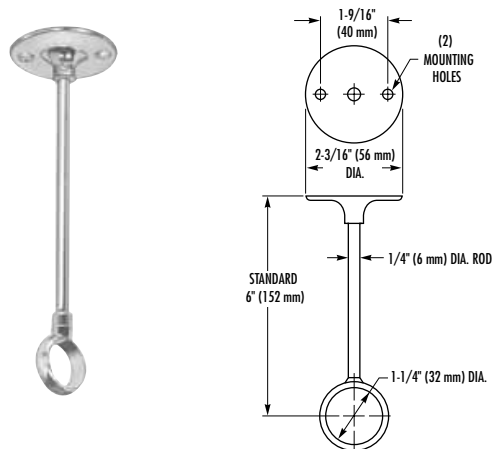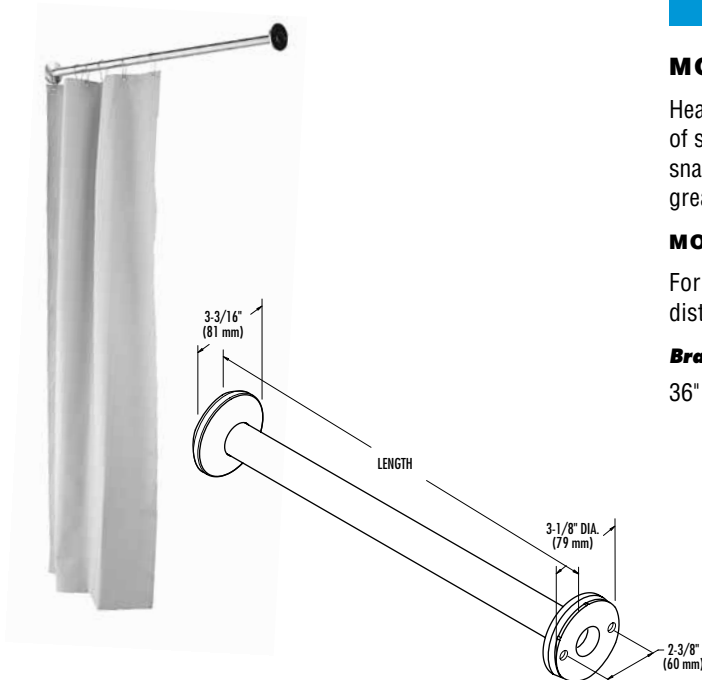

### MODEL 9522\*

Shower rod ceiling support. For 1¼" O.D. shower curtain rod. Chrome-plated brass bracket, stainless steel rod and collar.

*\* Required for shower rod 72" and greater. Must specify distance from ceiling.*

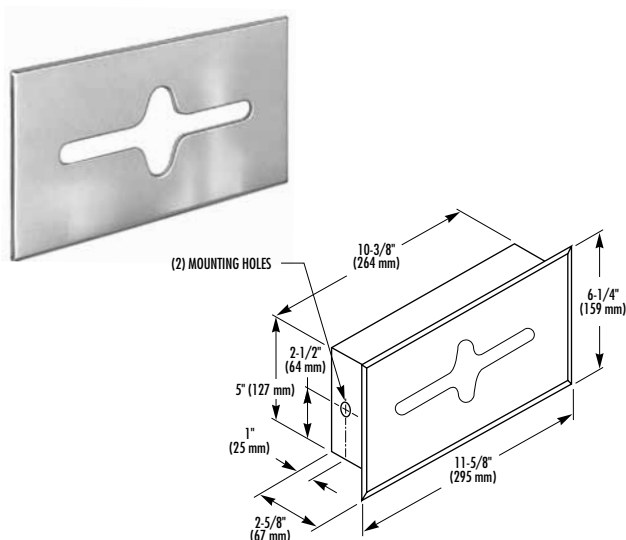


### MODEL 987

Recess-mounted facial tissue dispenser fabricated of stainless steel with exposed surfaces in satin finish. Rolled rim on face plate opening. Holds one box of 100 tissues.

Unit measures 11⅞" W x 6¼" H x 2⅝" D.

#### MODEL 987-78 Polished Stainless Steel Finish




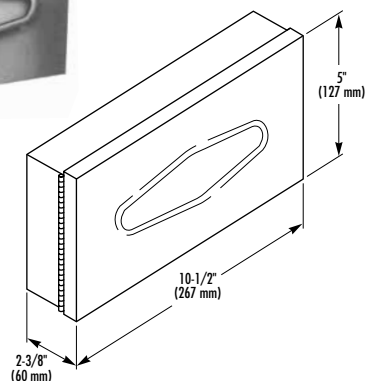

## MODEL 987-11

Surface-mounted facial tissue dispenser fabricated of stainless steel with exposed surfaces in satin finish. Holds one box of 100 tissues.


Unit measures 10½" W x 5" H x 2¾" D.

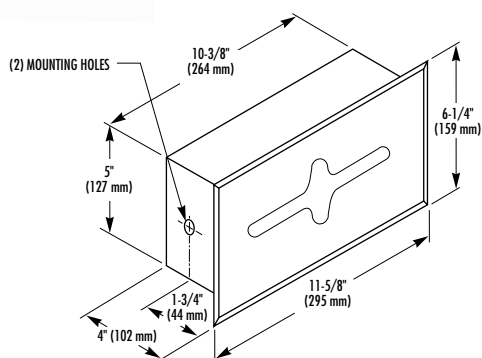

## MODEL 987-36 *Bradix*®

Recess-mounted, large-capacity facial tissue dispenser fabricated of stainless steel with exposed surfaces in satin finish. Holds one box of 300 tissues.

Rough wall opening 10¾" W x 5½" H x 4" D.




## MODEL 969

Surface-mounted ashtray fabricated of stainless steel with exposed surfaces in satin finish. Flip top.

Unit measures 6" L x 3¾" W.



Bradley offers a variety of hook, holder and shelf combinations to organize custodial equipment. Different configurations are available to fit any need or any space. Welded stainless steel construction stands up to tough use. Available in architectural satin finish.

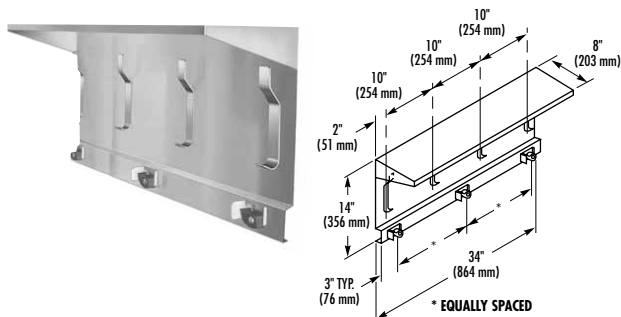


## MODEL 9933 Bradex®

One-piece construction with welded gusset and hooks. Mop and broom holders consist of spring-activated rubber cams on plated-steel retainers.

Unit measures 14" H x 34" L. Shelf projects 8" from wall. Has 4 hooks and 3 holders.

**MODEL 9934** Unit 44" L, has 5 hooks and 4 holders.

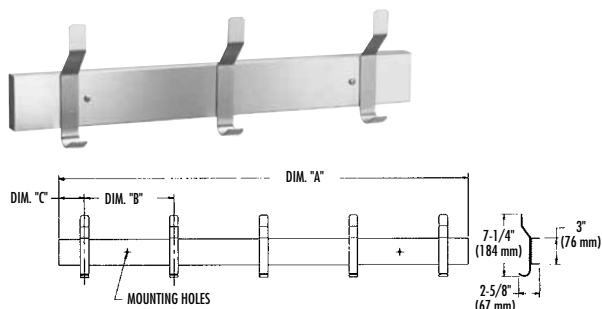


## MODEL 9943 Bradex®

Unit measures 7 1/4" H x 24" L. Projects 2 1/4" from wall. Has 3 hooks.

**MODEL 9944** Unit 36" L, has 4 hooks.

**MODEL 9945** Unit 48" L, has 5 hooks.

**MODEL 9946** Unit 60" L, has 6 hooks.

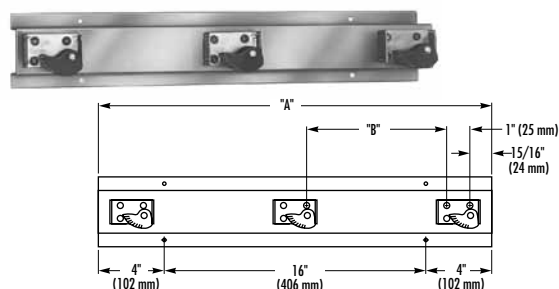


## MODEL 9953 Bradex®

Surface-mounted mop and broom holder. Fabricated of satin-finish stainless steel. Mop and broom holders consist of spring-activated rubber cams on plated-steel retainers.

Unit measures 4" H x 24" L. Projects 2 3/4" from wall. Has 3 holders.

**MODEL 9954** Unit 36" L, has 4 holders. **Bradex®**

**MODEL 9955** Unit 48" L, has 5 holders.

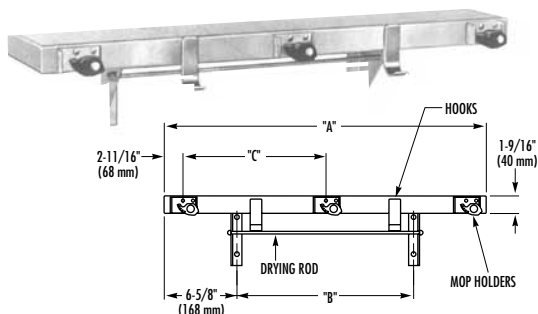

## MODEL 9983


Surface-mounted utility shelf with drying rod. Fabricated of satin-finish stainless steel. Mop and broom holders of spring-activated rubber cams on plated-steel retainers.

Unit measures 30" L x 8" D. Has 2 hooks and 3 holders.

**MODEL 9984** Unit 36" L, has 3 hooks and 4 holders. **Bradex®**

**MODEL 9985** Unit 42" L, has 4 hooks and 5 holders.

**MODEL 9986** Unit 48" L, has 5 hooks and 6 holders.

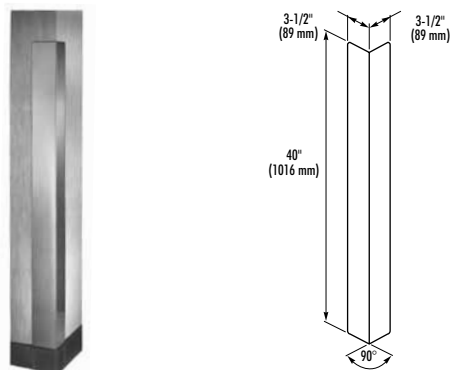

## MODEL 991 Corner Guard

Fabricated of stainless steel with exposed surfaces in architectural satin finish. Exposed surfaces are rounded. No sharp corners. Secured to wall with special adhesive backing.

Unit measures 3 1/2" W x 40" H.



# SHOWER SEATS 900 SERIES



## MODEL 954

Hinged corner shower seat. Heavy-duty, satin-finish, stainless steel with  $\frac{3}{4}$ " return edges. Folds to vertical position when not in use. Designed to support up to 250 lbs. static load.



## MODEL 9541 Fixed Corner Shower Seat

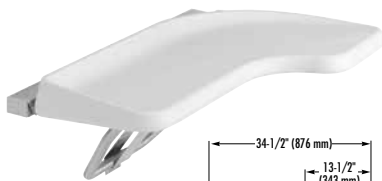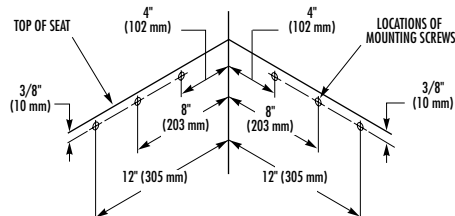

## MODEL 956 Bradex®


Seat fabricated of molded polyethylene. Contains antimicrobial agent. Folds to vertical position when not in use. Left hand configuration. Designed to support up to 250 lbs. static load.

## MODEL 9561 Right Hand Configuration Bradex®

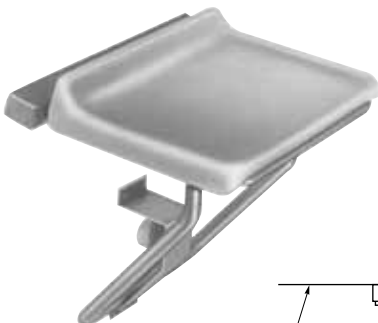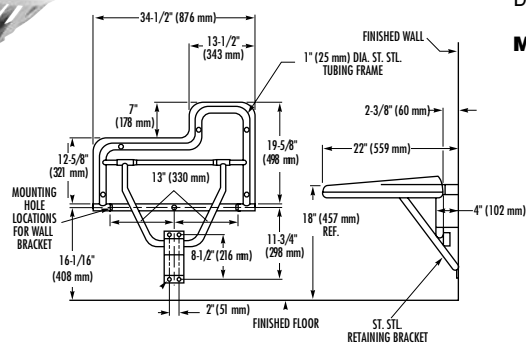


## MODEL 9557 Bradex®

Folding shower seat fabricated of molded polyethylene. Contains antimicrobial agent. Stainless steel tubing with stainless steel wall bracket and piano hinges. Folds to vertical position when not in use. Designed to support up to 250 lbs. static load.

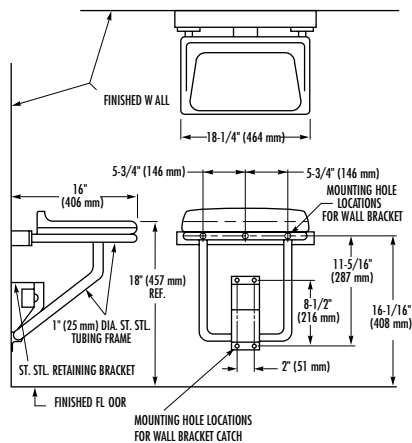


**MODEL 9558 Bradex®**


Folding, phenolic shower seat. Stainless steel tubing with stainless steel wall bracket and piano hinges. Seat of  $\frac{5}{16}$ " solid phenolic. Folds to vertical position when not in use. Designed to support up to 250 lbs. static load.


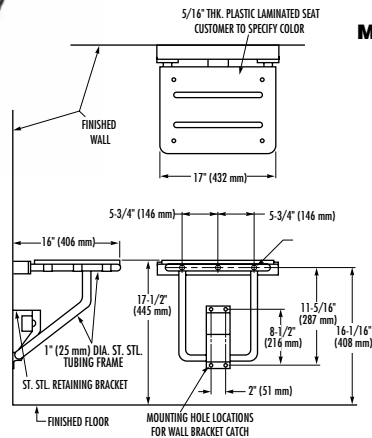
**MODEL 9559 African Teak Slats****MODEL 9562**

Folding, phenolic shower seat. Stainless steel tubing with stainless steel wall bracket and piano hinges. Seat of  $\frac{1}{2}$ " solid phenolic. Folds to vertical position when not in use. Designed to support up to 400 lbs. static load.

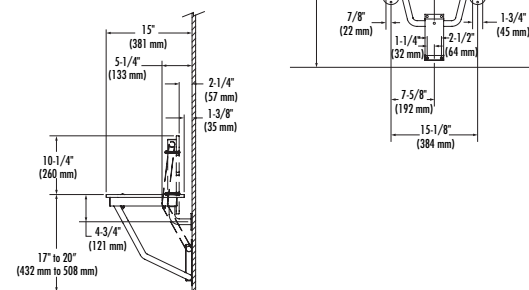**MODEL 9567**

Seat with barrier-free design is fabricated of five  $\frac{1}{2}$ "-thick and 3" wide, hand-rubbed African Teak slats with rounded edges secured to a stainless steel frame of 1"-diameter, 18-gauge tubing. When properly installed, designed to support up to 250 lbs. static load.

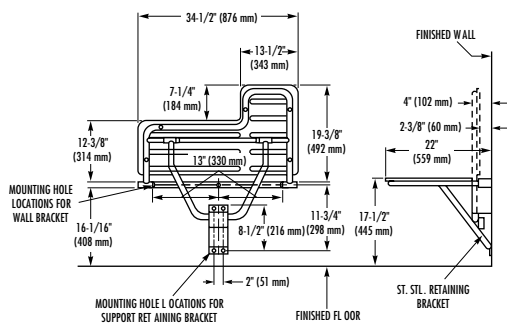
**MODEL 9568 Right Hand Seat with African Teak Slats**

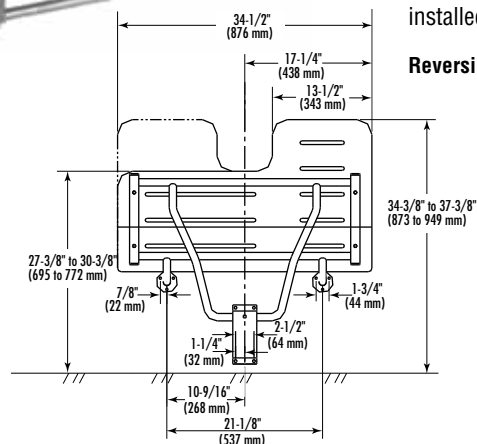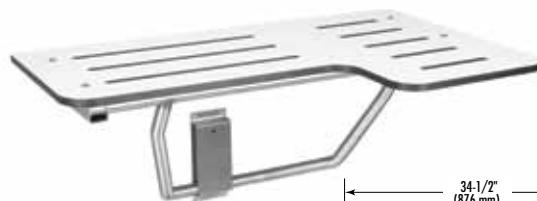

## MODEL 9569 Bradex®

Frame fabricated with satin-finish, stainless steel, 16-gauge U-channel and 18-gauge 1"-diameter tubing. Seat constructed of 1/2"-thick solid phenolic with white matte melamine finish. Reversible in field to be right or left. Barrier-free design. For color options, please see website. When properly installed, designed to support up to 250 lbs. static load.

**Reversible – Accommodates Right or Left Hand Configuration**

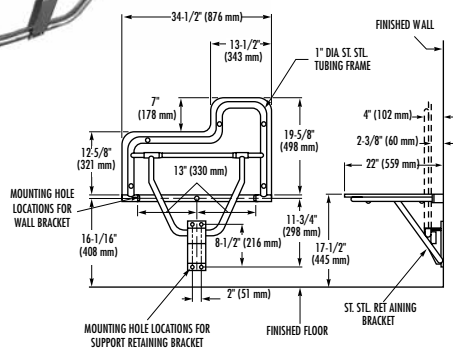

## MODEL 956-30

Folding stainless steel shower seat with left hand configuration. Frame fabricated of stainless steel tubing with stainless steel wall bracket and piano hinges. Seat of stainless steel with satin finish, rounded corners. Folds to vertical position when not in use. Designed to support up to 250 lbs. static load.


**MODEL 9561-30 Right Hand Configuration**



### MODEL 957 Bariatric Shower Seat **NEW!**


Folding bariatric shower seat with left hand configuration and barrier-free design. Frame fabricated of stainless steel tubing, 1¼" x 18-gauge square main frame with 1" x 18-gauge round cross members. Seat of ½"-thick solid phenolic with white matte melamine finish. When properly installed, designed to support at least 900 lbs.


#### MODEL 9571 Right Hand Configuration

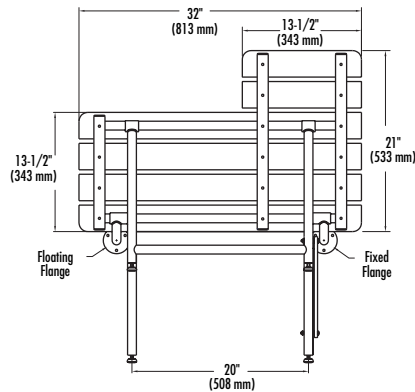

### MODEL 958 Bariatric Bench Shower Seat **NEW!**

Folding bariatric shower seat with barrier-free design. Frame fabricated of stainless steel tubing, 1¼" x 18-gauge square main frame with 1" x 18-gauge round cross members. Seat of ½"-thick solid phenolic with white matte melamine finish. When properly installed, designed to support at least 900 lbs.

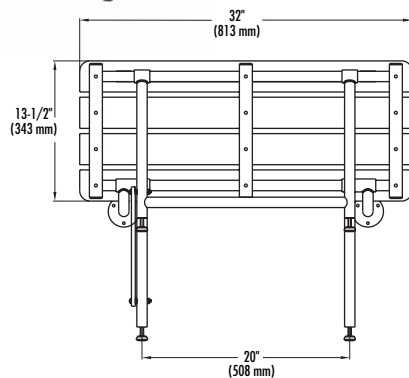




## MODEL 175

Recess-mounted, stainless steel medicine cabinet. 1/4" thick mirrored door 17 1/8" W x 30 5/8" H and spring-buffered rodstop. Cabinet may be field inverted for left hand door swing. Three adjustable stainless steel shelves.

Rough wall opening 15 5/8" W x 29 1/8" H x 4" D.


-11 Surface-Mounted

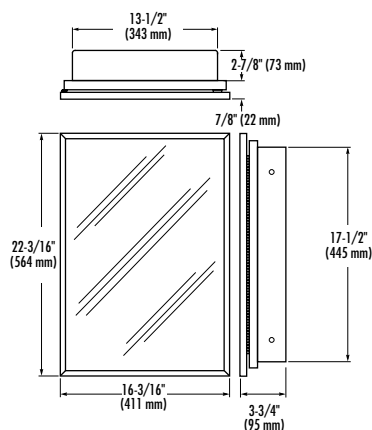

## MODEL 9661 Bradex®

Recess-mounted medicine cabinet. Cabinet is fabricated of sturdy one-piece, white injection-molded polystyrene. Door is steel with baked-enamel finish. Door has full piano hinge and magnetic catch. Mirror frame of stainless steel. Two adjustable polystyrene shelves. Reversible to swing either left or right.

Rough wall opening 14" W x 18" H x 3" D.

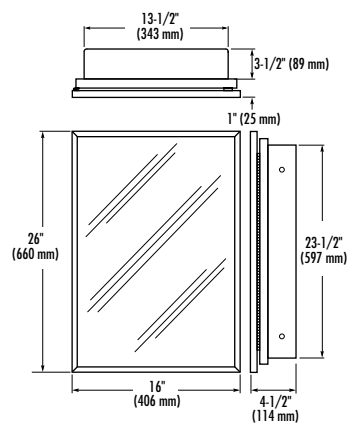


## MODEL 9663 Bradex®

Recess-mounted medicine cabinet. Seamless cabinet fabricated of one-piece, heavy drawn steel with baked-enamel finish. Mirror frame of stainless steel. Mirror of first-quality float glass, electro-copper-plated backed. Three adjustable prepainted metal shelves. Reversible for left or right hand swing.

Rough wall opening 14" W x 24" H x 3 5/8" D.



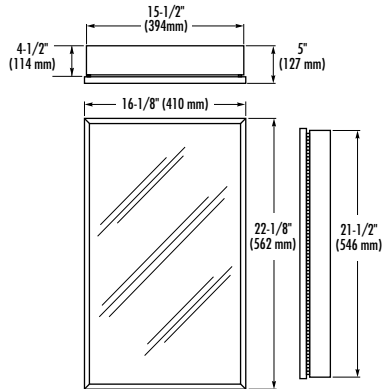


### MODEL 9664 *Bradex*®

Surface-mounted medicine cabinet. Fabricated of heavy-gauge steel with baked-enamel finish. Mirror frame of stainless steel. Mirror of first-quality float glass, electro-copper-plated backed. Two removable metal shelves. Reversible for left or right hand swing.

Unit measures 16¼" W x 22¼" H x 5" D.

## BABY CHANGING STATIONS


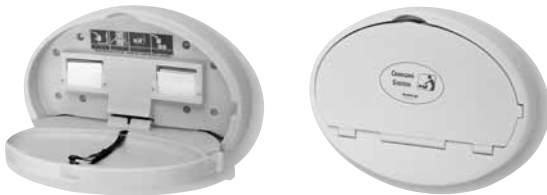


### MODEL 961 *Bradex*®

Surface-mounted, folding, high-density polyethylene unit. Full-length steel hinge mechanism. Molded-in liner dispensers and bag hooks. Attractive gray/white/black granite color. Requires less than 5 lbs. of pull force to open.

### MODEL 9611 Solid Light Gray Color *Bradex*®


### MODEL 9612 Ivory Color *Bradex*®

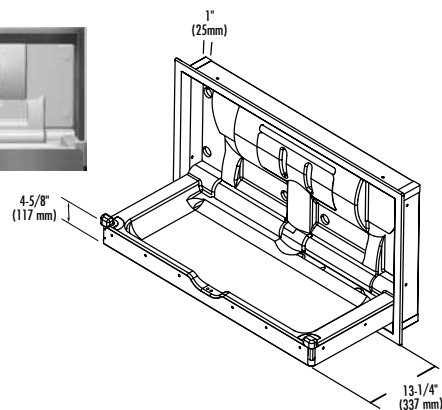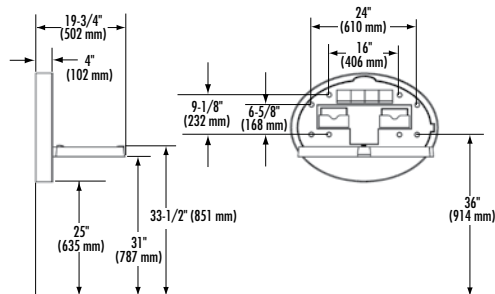

### MODEL 962 *Bradex*®


Recess-mounted unit with polyethylene body and barrier-free design. Brushed stainless steel exterior. Standard with molded, dual-liner dispenser (holds approximately 50 per dispenser). Safety belt with cam-buckle is adjustable with one hand. Pneumatic gas shock mechanism ensures smooth, safe open and close motions. Rated to support static load of 250 lbs.

### MODEL 962-11 Surface-Mounted *Bradex*®

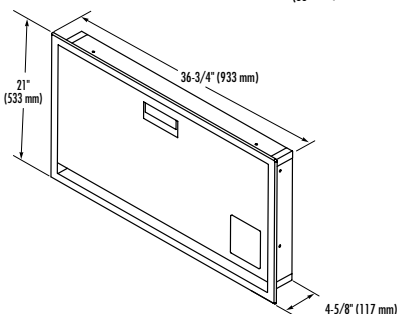

# HEALTH CARE UNITS

Hygiene, durability and safety are featured in Bradley's hospital/patient care line.  
Fabricated of stainless steel for continuous, trouble-free use.




## MODEL 9813 Bradex®

Specimen pass-thru cabinet. Self-closing doors with stainless steel piano hinges and chrome-plated brass knobs. Interlock mechanism prevents both doors from being open at the same time. Equipped with seam-soldered spill tray.

Rough wall opening 11<sup>5</sup>/<sub>8</sub>" W x 10<sup>7</sup>/<sub>8</sub>" H.

Flanges adjust from 3<sup>1</sup>/<sub>2</sub>" to 5<sup>1</sup>/<sub>2</sub>" wall thickness.

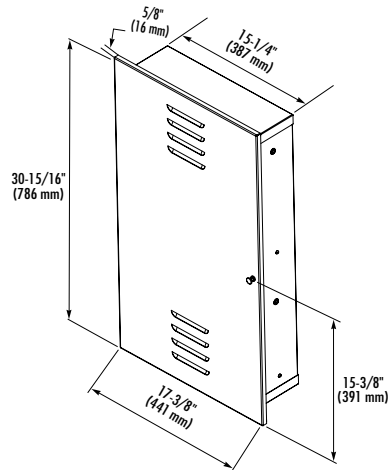


## MODEL 990

Recess-mounted bedpan storage cabinet. Door has full-length piano hinge, magnetic catch, rodstop, chrome-plated brass knob and ventilation louvers. Interior rods and removable drip pan. Leak-proof bottom prevents leakage behind unit and into wall structure.

Rough wall opening 15<sup>5</sup>/<sub>8</sub>" W x 29<sup>1</sup>/<sub>16</sub>" H x 5" D.

## MODEL 990-11 Surface-Mounted

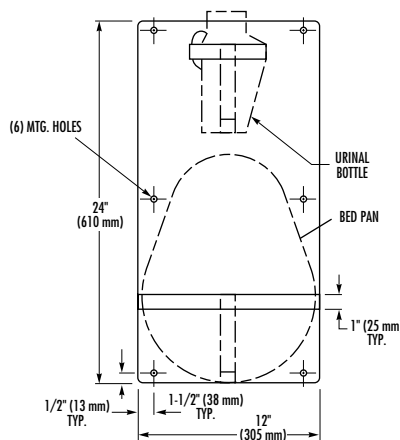

## MODEL 9905

Surface-mounted bedpan and urinal storage unit. Fabricated of stainless steel with exposed surfaces in satin finish.

Unit measures 12" W x 24" H.

Projects 5<sup>1</sup>/<sub>4</sub>" from wall.

**Note:** Bedpan and urinal not included.

You can rely on Bradley for a complete line of durable Security Fixtures for penal institutions and detention facilities. Our broad-based accessory line ranges from bookshelves and clothes hooks to soap dishes and tissue holders. All are fabricated of heavy-duty stainless steel.

## SECURITY MIRRORS

### MODEL SA01, SA03

Security mirror frame fabricated of 14-gauge stainless steel. Reinforced with fiberboard backing. Chase mounted with welded anchor nuts on back of frame. Furnished with 1/4"-20 threaded studs cut to length for specified wall thickness. Designed for areas where ordinary mirrors are subject to breakage or theft, or can be used as weapons.



Unit measures 12" W x 16" H.

### MODEL SA03

Front mounted furnished with vandal-resistant, torx-head machine screws.

### REFLECTIVE SURFACES

- 1 20-gauge, 300 series stainless steel polished to a No. 8 architectural finish.
- 2 20-gauge, 400 series stainless steel with bright annealed finish.
- 5 Plexiglas® mirror.

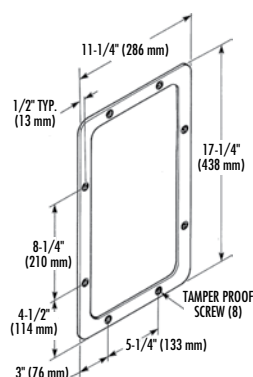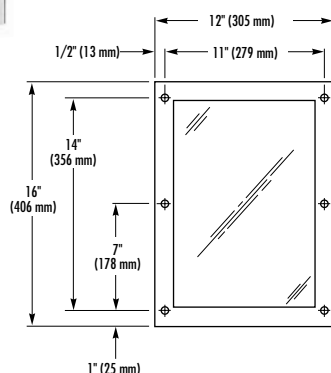

### MODEL SA05 (shown), SA06

Integral frame security mirror fabricated of stainless steel polished to No. 8 architectural bright finish. Counter-sunk holes for mounting. Furnished with 1/4" tamper-resistant machine screws. Designed for areas where ordinary mirrors are subject to breakage or theft, or can be used as weapons.

Unit measures 11 1/4" W x 17 1/4" H.

### MODEL SA06

Unit measures 10 1/16" W x 11 1/16" H.




## SOAP DISHES

### MODEL SA16

Chase-mounted, recessed soap dish fabricated of heavy-duty stainless steel with exposed surfaces in architectural satin finish. Rim of dish is beveled to insure tight fit to wall surface. Threaded studs are provided for rear chase mounting to specified wall thickness.

Unit measures 5 $\frac{5}{8}$ " W x 3 $\frac{5}{8}$ " H x 2 $\frac{3}{4}$ " D with 5" x 7" flange.



### MODEL SA21, SA22


Soap dish fabricated of heavy-duty stainless steel in architectural satin finish. Formed from single-piece stainless steel with three drain holes.

#### MODEL SA21 Chase Mounted

Soap dish has welded anchor nuts to receive  $\frac{1}{4}$ "-20 provided studs. Nuts and washers included.

#### MODEL SA22 Front Mounted (shown)

Soap dish supplied with  $\frac{1}{4}$ "-20 x 1 $\frac{1}{2}$ " L torx-head machine screws for installation to wall anchors.




## TISSUE HOLDERS

### MODEL SA09 Chase Mounted


### MODEL SA10 Front Mounted (shown)


Security toilet tissue holder is fabricated of heavy-duty, seamless stainless steel tubing with architectural satin finish. Stainless steel end cap is welded and ground smooth.



### MODEL SA11


Chase-mounted, recessed, roll toilet tissue holder is one-piece, drawn stainless steel, seamless construction, 4 $\frac{5}{16}$ " deep, 5 $\frac{1}{2}$ " inside diameter. Roll will project if contraband is concealed behind tissue. Threaded studs are provided for rear mounting to specified wall thickness.



**MODEL SA12**


Front-mounted, recessed, roll toilet tissue holder is one-piece, drawn construction with welded front flange plate. Unit is  $4\frac{5}{16}$ " deep,  $5\frac{1}{2}$ " inside diameter. Roll will project if contraband is concealed behind tissue.

Unit measures 7" W x 7" H x  $4\frac{1}{2}$ " D.

**MODEL SA13 Chase Mounted****MODEL SA14 Front Mounted** (shown)**MODEL SA15 Partition Mounted** (for 1" thick partitions)


Security toilet tissue holder is fabricated of heavy-duty, seamless stainless steel with exposed surfaces in architectural satin finish. Interior is satin-gloss blast finish. All welds and edges are ground smooth and corners are rounded.

Unit measures  $4\frac{3}{4}$ " W x 8" H. Projects  $2\frac{3}{4}$ " from wall.

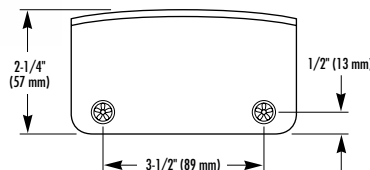**TOOTHBRUSH HOLDERS****MODEL SA25 Chase Mounted****MODEL SA26 Front Mounted** (shown)

Security toothbrush holder fabricated of heavy-duty stainless steel with exposed surfaces in architectural satin finish. Formed from single piece of stainless steel. Holds 4 toothbrushes.

Unit measures 5" W x  $2\frac{1}{4}$ " H. Projects  $2\frac{13}{16}$ " from wall.

**CLOTHES HOOKS AND BOOKSHELVES****MODEL SA30 Chase Mounted****MODEL SA31 Front Mounted** (shown)

Security towel hook fabricated of heavy-duty stainless steel with exposed surfaces in architectural satin finish. One-piece formed and ground smooth.

Unit measures 5" W x 5" H. Projects  $1\frac{5}{16}$ " from wall.




**MODEL SA32** Chase Mounted

**MODEL SA33** Front Mounted (shown)

Security towel hook strip fabricated of heavy-duty stainless steel with exposed surfaces in architectural satin finish. All seams are welded and ground smooth.

Unit measures 18" W x 5½" H. Projects 1⅝" from wall.

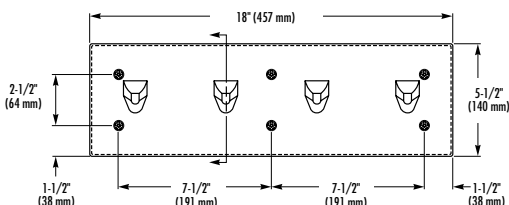

**SA35**




**SA36**

**MODEL SA35** Chase Mounted

**MODEL SA36** Front Mounted

Security towel hook backplate fabricated of heavy-duty stainless steel in architectural satin finish. Safety hook of stainless steel with pivoting ball joint that releases when excessive force is applied.


Unit measures 4" W x 4" H. Projects 2¼" from wall.



**MODEL SA41**

Security towel hook strip fabricated of heavy-duty stainless steel with exposed surfaces in architectural satin finish. All seams are welded and ground smooth. Safety hooks with pivoting ball joints that release when excessive force is applied.


Unit measures 18" W x 6⅞" H x 2¼" D


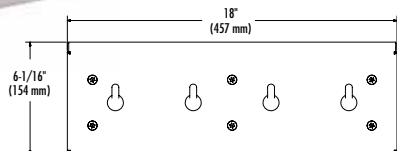


**MODEL SA37** Front Mounted **Bradex®**

Safety clothes hook. Bracket is fabricated of heavy-duty stainless steel with stainless steel hook. Hook trips into down position when excessive loading is applied. Tension can be adjusted by special torx driver.


Unit measures 1" W x 4⅝" H. Projects 3" from wall.



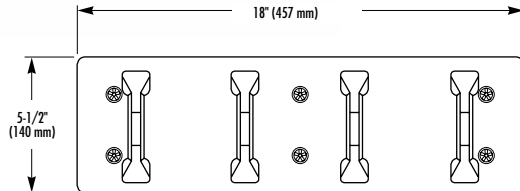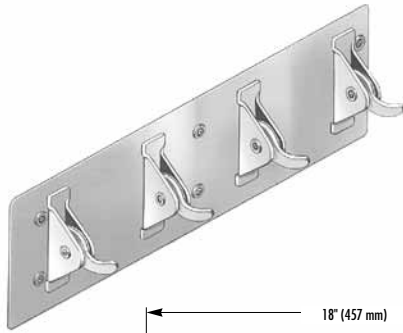**MODEL SA38 Chase Mounted****MODEL SA39 Front Mounted** (shown)


Security clothes hook strip. Bracket is fabricated of heavy-duty stainless steel with stainless steel hook. Hook trips into down position when excessive loading is applied.

Unit measures 18" W x 5½" H. Projects 3" from wall.

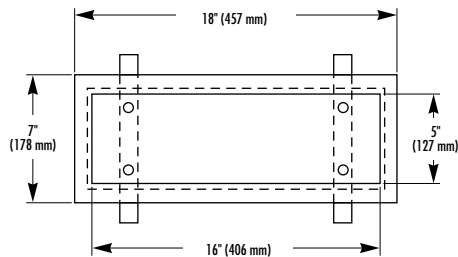**MODEL SA47 Chase Mounted**


Chase mounted, recessed shelf is fabricated of heavy-duty stainless steel with exposed surfaces in satin finish. Threaded studs are provided for rear mounting to specified wall thickness.

Unit measures 16" W x 5" H x 4" D with 18" x 7" flange.

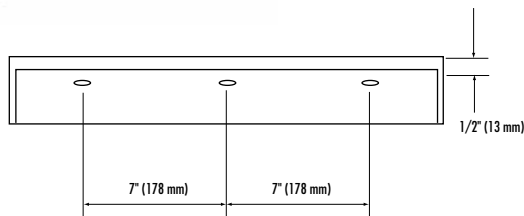**MODEL SA49 Chase Mounted**

Security, recessed shelf fabricated of heavy-duty stainless steel with exposed surfaces in architectural satin finish. All welds are ground smooth with polished corners and burr-free edges. Back of shelf has welded anchor nuts to receive threaded studs (provided).


Unit measures 16" W x 2⅝" H. Projects 4" from wall.

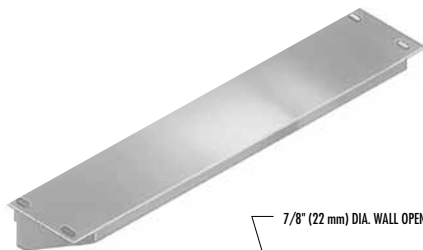

## MODEL SA50 Chase Mounted

Chase mounted, security shelf with toothbrush slots. Fabricated of heavy-duty stainless steel in architectural satin finish. Four slots for toothbrushes. Threaded studs are provided for rear mounting to specified wall thickness.

Unit measures 18" W x 2 $\frac{5}{16}$ " H. Projects 4" from wall.

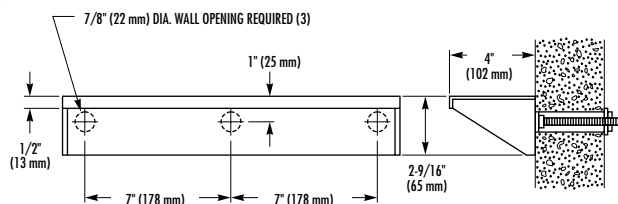


## MODEL SA51 Chase Mounted (shown)

## MODEL SA52 Front Mounted

Security bookshelf with clothes hooks fabricated of heavy-duty stainless steel with exposed surfaces in architectural satin finish. All seams are welded and ground smooth. Shelf interior is glass blasted to a uniform finish. Safety hooks fabricated of bright, chrome-plated brass housing with stainless steel ball and spring. Friction mechanism releases when excessive force is applied.

Unit measures 18" W x 11" H. Projects 8 $\frac{5}{16}$ " from wall.

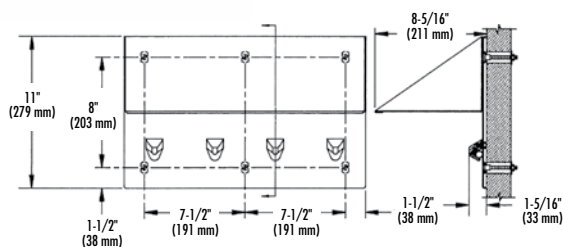


## MODEL SA53 Chase Mounted (shown)

## MODEL SA54 Front Mounted

Security bookshelf with clothes hooks. Shelf and backplate are fabricated of heavy-duty stainless steel with architectural satin finish. Shelf interior is glass-blast satin finish. Bracket is fabricated of heavy-duty stainless steel with stainless steel hooks. Threaded studs are provided for rear mounting to specified wall thickness.

Unit measures 18" W x 11" H. Projects 8" from wall.

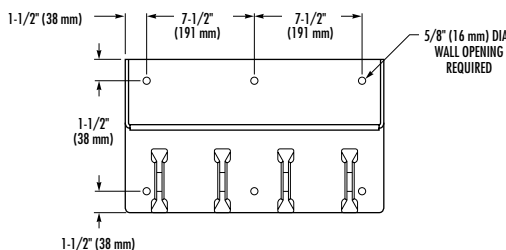




**MODEL SA55 Chase Mounted** (shown)**MODEL SA56 Front Mounted**



Security bookshelf fabricated of heavy-duty stainless steel with exposed surfaces in architectural satin finish. All seams are welded and ground smooth. Shelf interior is glass-bead blast finish. Backplate on rear-mounted unit has welded anchor nuts to receive threaded studs (provided).

Unit measures 18" W x 5½" H. Projects 8" from wall.

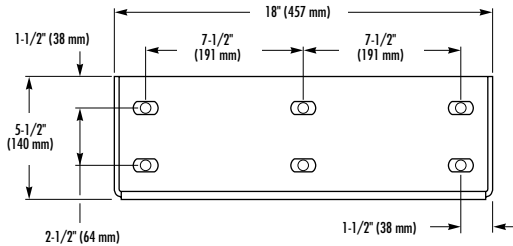**RECESSED SEAT****MODEL SA65 Recessed**

Recessed seat opens out from wall to provide sturdy bench seating. Folds up into recessed housing when not in use. Seat fabricated of heavy-duty stainless steel. Exterior surfaces polished to No. 4 satin finish. Hinge is solid ¾" diameter stainless steel bar. Seat supports up to 750 pounds.

Unit measures 16¼" W x 17¼" H. Open seat projects 12¼" from wall.

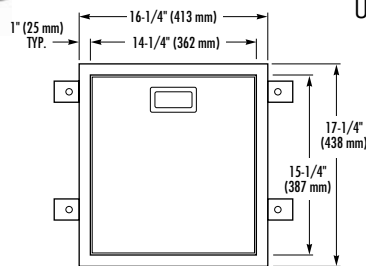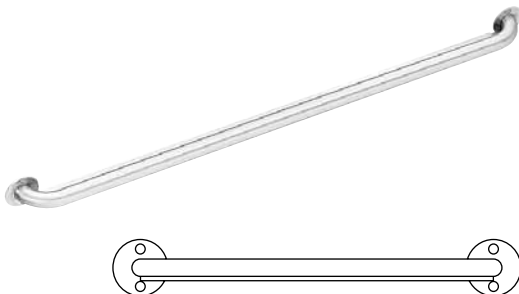**GRAB BAR****MODEL SA70 Bradex®**

Heavy-duty stainless steel tubing 1½" O.D. with welded stainless steel mounting flanges. Meets or exceeds the requirements of ANSI Standard A117.1, the ADA and ABA Accessibility Guidelines for Buildings and Facilities (ADAAG) and the Uniform Federal Accessibility Standard (UFAS). Exposed front mounting with torx-head screws with welded stainless steel closure plate to thwart suicide attempts.

## BRADMAR™

Formulated from an advanced formula of high-density polyethylene (HDPE). 21 standard colors including speckled and solid colors with stainless steel shoes and aluminum wall brackets. Suited for humid and wet areas, and high-traffic or vandal-prone locations. Recommended for schools, parks, recreation centers. 15-year warranty.

**HARDWARE:** Heavy-duty aluminum.



## PHENOLIC

Highly durable. Almost any Formica®, Arborite®, or Trespa color/pattern can be selected. Edges are solid black. Recommended for humid and wet areas. Resists water, oil, and bacteria. Withstands hose-down cleaning. Suited for outdoor parks, pools, shower rooms. 3-year warranty against delamination and discoloration.

**HARDWARE:** Heavy-duty, cast stainless steel, stamped stainless steel door hinges.



## PLASTIC LAMINATE

Almost any Formica® or Wilsonart® color/pattern can be selected. Edges are laminated. Best where style and low cost are priority and in dry area with lower vandalism. Recommended for restaurants, movie theaters, retail and office buildings. 3-year warranty against delamination and discoloration.

**HARDWARE:** Heavy-duty, chromed Zamac.



## BAKED ENAMEL


21 standard colors. High-quality gloss finish. Low cost. Recommended for office buildings, restaurants, religious institutions and environments less prone to vandals. 15-year warranty against rust-out.

**HARDWARE:**  
Heavy-duty, chromed Zamac.



## FUSION GRANITE

Four colors of natural granite and three stainless steel finishes. Combines the natural beauty and durability of granite with the sleek style of stainless steel.

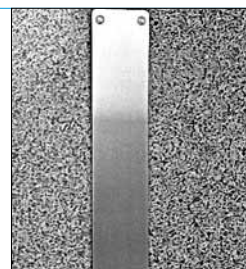

## STAINLESS STEEL


High design and contemporary style. Soft brushed satin finish, 5WL textured or leather-grain patterns available. Textured patterns wrap around edges. Recommended for airports, stadiums, rest stops. 15-year warranty against rust-out.

**HARDWARE:** Heavy-duty, chromed Zamac.




## SENTINEL™ OVERHEAD BRACED – SERIES 400

Overhead braced partitions provide the most economical solution for heavy-traffic and vandalism-prone areas. Because it requires no special floor or ceiling construction, installation is easy in new or old buildings. The anti-grip head rail provides outstanding rigidity.

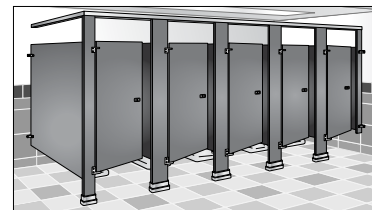

## FLOOR BRACED – SERIES 500

This style complements design with functional performance. Recommended for buildings with high ceilings, it enhances the effect of spaciousness. A minimum of 3" concrete construction is required for anchoring. This style is not available in Bradmar solid plastic.

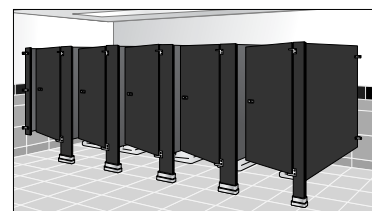

## CEILING HUNG – SERIES 600

Ideal for areas with low ceilings. Offering an area free from obstruction to allow for fast and easy maintenance, this system requires proper structural supports in the ceiling for maximum rigidity. Not recommended for ceiling heights over 8 feet. This style is not available in Bradmar solid plastic.




## FLOOR-TO-CEILING – SERIES 700

Anchored at the floor and ceiling, main structural support can be provided by Series 500 or 600 mounting systems. Perfect for areas where additional support is required.




## URINAL SCREENS

Wall-hung style provides economy and ease of maintenance while floor supported or floor-to-ceiling (not shown) screens offer extra stability for high-traffic areas.

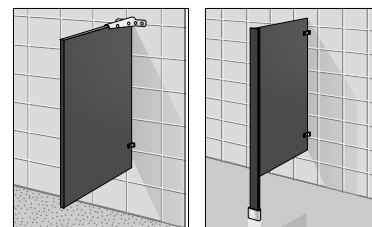

## SHOWER DIVIDERS

Available in Bradmar® solid plastic, an advanced formula of high-density polyethylene (HDPE). Standard sized or customized to meet your facility layout, Bradmar shower dividers are available in 21 colors, including speckled and solid colors. All Bradmar solid plastic products are covered by a 15-year warranty.

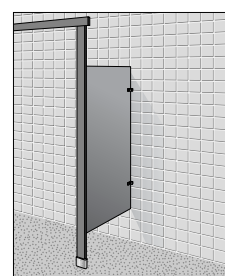

Design flexibility is a prime feature of Lenox® Lockers, offering countless options and configurations. Installation is simple. Lockers are shipped fully assembled and ready for attachment to the wall and each other.

Solid plastic lockers are formed of polymer resin with homogeneous color. Doors and frames are ½" thick, and sides, shelves, tops and bottoms are ⅜" thick. Locker box is one piece, all welded construction, providing outstanding rigidity and strength. Continuous latch bar runs the entire length of the door, providing a secure closure. Handle mechanism is capable of accepting a padlock and is securely fastened to the door. Stainless steel piano hinge is continuous and integrates into the full length of the door and main locker body.

20-year warranty against rust, delamination or breakage of any of the plastic components under normal use.

## OPTIONS INCLUDE:

- Built-in Key Locks
- Built-in Combination Locks
- Coin-Operated Locks
- Card Locks
- Keypad Locks
- Combination Padlocks
- End Panels
- Solid Plastic Bases
- Slope Tops
- Colored Flat Tops
- Mesh Doors
- Engraved Logos
- Number Plates
- Plastic Coat Hooks
- Coat Rods
- Wall Hooks
- Fillers
- Mirrors



## Z-LOCKER

Z-Locker design provides practical multi-tiered storage without wasting valuable floor space or compromising customer satisfaction. Double your locker availability while still providing clients with hanging space to keep garments wrinkle free.



## CUBBY LOCKER

The easy-access cubby locker is perfect for items that do not require locked storage. The durable cubby is shipped fully assembled and can reduce installation costs by up to 50 percent.

**Note:** Three cubby lockers shown.



## LOCKER BENCH

The 1" thick bench top is smooth, seamless and oversized. The 20" locker underneath provides valuable additional storage space. Available in three-foot through six-foot lengths.



## GEAR LOCKERS

Wider and deeper than standard lockers, Lenox® Gear Lockers provide maximum storage and maximum durability with the best lead time and best warranty available!



## PEDESTAL BENCH

The bench top is 1½" thick and available in 36" to 96" in one-foot increments. Pedestals are black anodized aluminum. ADA-compliant height is 18½". 9½", 12", 18" and 24" widths available.



## POCKET LOCKS

User inserts Pocket Lock into any vacant lock and secures belongings. When they are ready to move on, they unlock the Pocket Lock and take it along to the next bank of lockers.



## STAINLESS STEEL

Stainless Steel is a low-carbon steel that contains chromium. The addition of chromium gives the steel its unique corrosion-resisting properties. It is extremely durable, resists corrosion, and stands up to many chemicals.

Despite the fact that stainless steel surfaces are generally non-tarnishing, they are not stain or rust proof. Stainless steel must be kept clean and free from contaminants. Frequent cleaning with mild soap and water or glass cleaner and a cotton cloth is required. Any discoloration or corrosion (commonly caused by contact with harsh cleaner, muriatic acid or bleach solutions) should be removed as soon as possible or permanent discoloration and pitting of the surface could occur. Most discoloration can be removed with a mild cleanser or stainless steel cleaner and a Scotchbrite® pad. The surface should then be thoroughly rinsed with clear water. With proper maintenance, stainless steel will maintain its luster and appearance indefinitely.



## MIRRORS

Bradley mirrors are fabricated from heavy-gauge stainless steel frames and plate glass or an alternative reflective surface. The frame can be cared for by following the general stainless steel maintenance instructions above. Reflective surfaces can be cleaned with any standard non-abrasive glass cleaner and a soft cloth. Care must be taken to avoid allowing the cleaner to run down the surface of the mirror and collect in the frame. If allowed to continue, this could lead to premature silver spoilage and spotting on stainless steel.



## SOAP DISPENSERS

Bradley soap dispensers provide dependable, consistent operation over the long term when the proper soap is used and when a minimal amount of periodic maintenance is performed on the valves. Soaps satisfying these basic guidelines will provide consistent flow and reduce clogs.

Soap thickness is determined by a measurement called viscosity. Soap viscosity should be between 100 cps (centerpoise) and 2500 cps for all Bradley soap dispensers. The pH (acid) level of soaps that will perform consistently should be in the range of 6.5 to 8.5. More acidic soaps (pH levels lower than 6.5) will corrode metal parts (even stainless steel) and degrade rubber and plastic components. Most inexpensive soaps (typically the pink lotion type) fall into this acidic category and will eventually cause valve failure and metal corrosion. PCMX or Isopropanol-based antibacterial soaps (within viscosity and pH limits) will also work with Bradley dispensers.

Valves must also be maintained (cleaned) to function properly. At the very minimum, hot water should be pumped through valves periodically to clear out soap residue. Ideally valves should occasionally be soaked for 30 minutes in hot water or a soap valve cleaning solution. With proper maintenance and soap, Bradley dispensers will provide long-term, trouble-free operation.



# INDEX

MODEL NO.	PAGE	MODEL NO.	PAGE	MODEL NO.	PAGE	MODEL NO.	PAGE
130	2	377-38	19	901	60	2277	7
155	2	401	20	901-60	60	2291	8
175	3, 69	402	20	907	61	2297	8
194	3	403	20	908	59	2441	10
198	3	404	21	911	60	2442	11
225	6	407	21	912	60	2447	11
227	7	426	21	914	60	2479	11
229	7	428	21	915	61	2481	12
234	8	505	24	917	54	2482-11	12
234-35	8	508	26	921	57	2483	12
234-65	8	508-32	26	921-60	57	2492	12
235	9	510	28	924	57	2494	13
236	9	515	29	926	58	2495	13
237	9	522	24	927	58	2902-280000	15
237-35	9	523	26	931	58	2902-287300	15
237-65	9	582	32	932	59	2902-287400	15
238	10	583	32	934	59	2903-280000	15
244	10	584	32	936	56	2904-280000	15
247	11	591	30	940	56	2905-287300	15
250-15	13	592	30	947	59	3157	16
251-15	13	594	31	953	62	3251	16
252	14	643	33	953-4	62	3257	16
259	14	644	33	954	66	3565	18
270	14	648	35	956	66	4017	20
315-35	17	650	35	956-30	68	4721-15	22
334	17	655	36	957	69	4722-1015	22
334-35	17	657	36	958	69	4722-15	22
334-65	17	658-30	36	961	71	4731-15	22
344	17	661	37	962	71	4737	23
344-35	17	662	37	962-11	71	4781-15	23
344-65	17	740	39	969	64	4791-15	23
346	17	747	39	987	63	5053	24
346-35	17	747W	40	987-11	64	5054	25
346-65	17	748	40	987-36	64	5061	24
355	18	755	41	987-78	63	5071	25
355-35	18	756	41	990	72	5084	26
355-65	18	758	41	990-11	72	5085	26
356	18	780	38	991	65	5102	28
356-35	18	781	38	1471	2	5103	28
357	18	782	39	1981	4	5104	28
357-35	18	790	41	1985	4	5105	28
359	19	812	43	2017	5	5106	26
377	19	817	43	2027	5	5123	28
377-36	19	832	43	2037	5	5124	28
377-3637	19	837	43	2251	6	5125	28
377-37	19	852	43	2252	6	5126	26
377-3738	19	900	52	2271	7		

MODEL NO.	PAGE	MODEL NO.	PAGE	MODEL NO.	PAGE	MODEL NO.	PAGE
5127	29	7805	38	9353	55	9955	65
5224	25	7815	38	9362	56	9983	65
5234	26	8170-158	49	9363	56	9984	65
5235	26	8170-1581	49	9401	56	9985	65
5241	25	8370-101	49	9402	56	9986	65
5262	27	8370-102	49	9403	56	P10-696	16
5263	27	8370-103	49	9403-96	56	P15-025	19
5402	27	9001	52	9495	57	P15-098	19
5412	29	9014	52	9522	63	P15-195	19
5422	29	9015	52	9530-60	62	SA01	73
5424	27	9034	52	9530-72	62	SA03	73
5425	27	9035	52	9531	62	SA05	73
5831	32	9044	52	9531-4	62	SA06	73
5847	32	9045	52	9533	61	SA09	74
5911	30	9054	53	9534	61	SA10	74
5912	30	9055	53	9535	61	SA11	74
5912-10	30	9065	53	9536	61	SA12	75
5912-11	30	9066	53	9537	61	SA13	75
5921	31	9094	53	9538	63	SA14	75
5922	31	9095	53	9538-4	63	SA15	75
5932	31	9104	53	9539	63	SA16	74
5942	32	9104-90	53	9539-4	63	SA21	74
6315	33	9105	53	9540	62	SA22	74
6315-KT0000	33	9105-90	53	9541	66	SA25	75
6322	34	9111	54	9557	66	SA26	75
6322-67	34	9114	54	9558	67	SA30	75
6322-68	34	9115	54	9559	67	SA31	75
6324	34	9118	60	9561	66	SA32	76
6324-67	34	9119	60	9561-30	68	SA33	76
6324-68	34	9124	54	9567	67	SA35	76
6326	34	9125	54	9568	67	SA36	76
6326-67	34	9134	54	9569	67	SA37	76
6326-68	34	9135	54	9571	68	SA38	77
6334	34	9144	55	9611	71	SA39	77
6437	33	9180	50	9612	71	SA41	76
6481	35	9181	50	9661	70	SA47	77
6501	35	9182	50	9663	70	SA49	77
6531	37	9183	51	9664	71	SA50	78
6542	35	9184	51	9813	72	SA51	78
6562	35	9185	51	9905	72	SA52	78
6563	35	9186	51	9933	65	SA53	78
6583	37	9301	58	9934	65	SA54	78
6843	37	9311	59	9943	65	SA55	79
7405	39	9314	55	9944	65	SA56	79
7471	39	9315	55	9945	65	SA65	79
7481	40	9334	55	9946	65	SA70	79
7510	41	9335	55	9953	65		
7512	41	9352	55	9954	65		





## Commercial Washroom Innovation

Printed on FSC Certified paper



**Mixed Sources**  
Product group from well-managed  
forests and other controlled sources  
[www.fsc.org](http://www.fsc.org) Cert no. SGS-COC-003992  
© 1996 Forest Stewardship Council

800.BRADLEY (800.272.3539) [bradleycorp.com](http://bradleycorp.com)  
W142 N9101 Fountain Boulevard  
Menomonee Falls, WI 53051  
3767-10-1210

**Bradley**   
Celebrating 90 Years of Innovation 1921•2011